



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)


SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

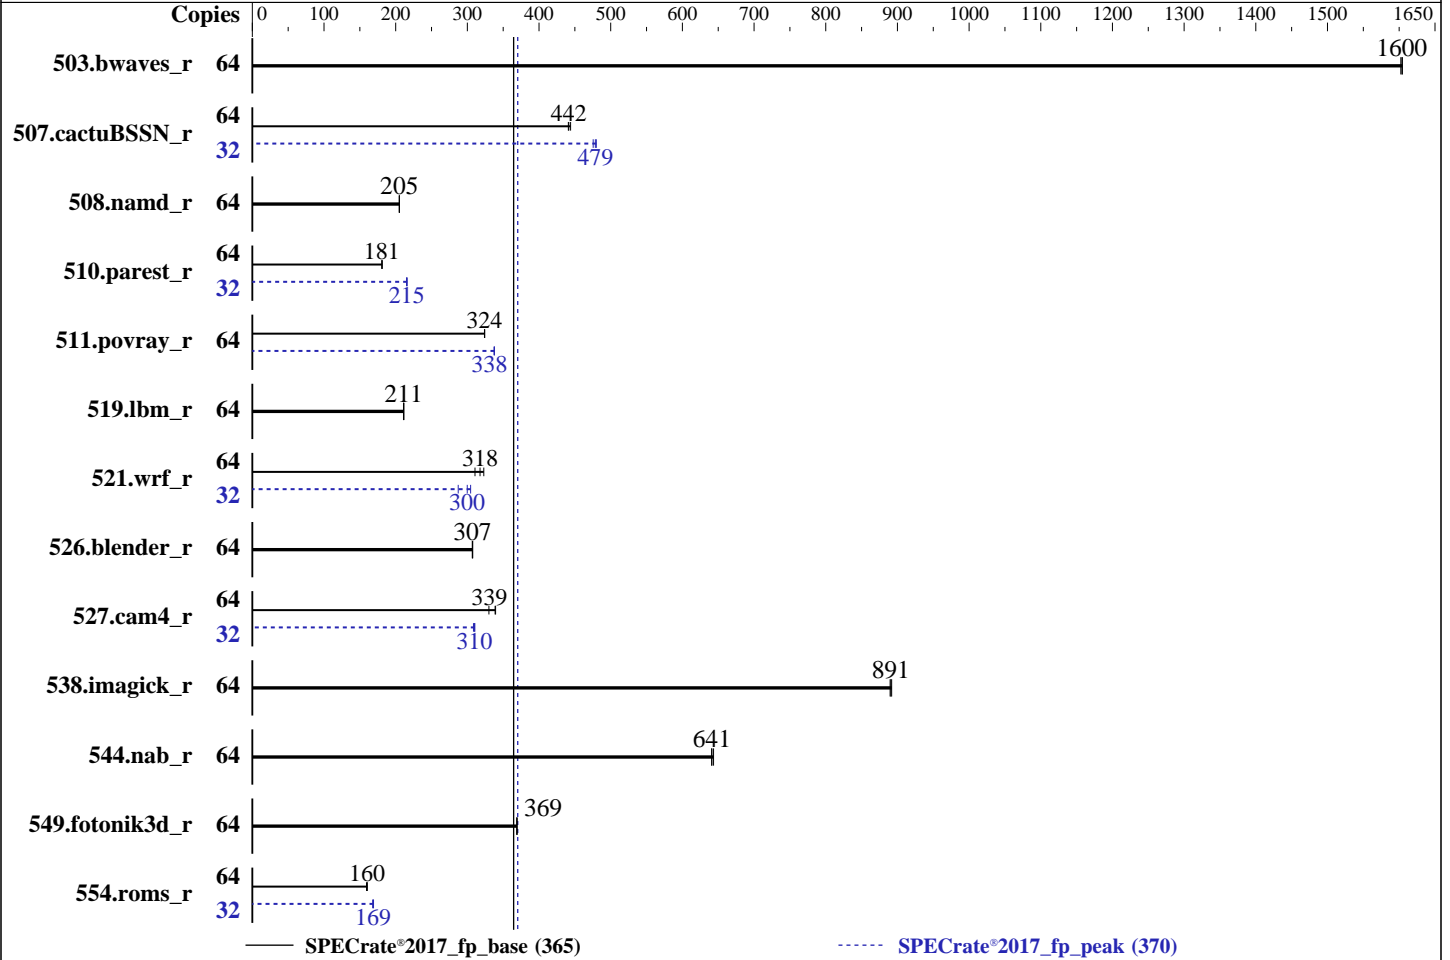

Hardware

CPU Name: Intel Xeon Gold 5416S
 Max MHz: 4000
 Nominal: 2000
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
 Storage: 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.4 LTS
 6.8.0-47-generic
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version EG0.10.01 released Mar-2024
 File System: ext4
 System State: Run level 5 (multi user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	400	1600	401	1600	400	1600	64	400	1600	401	1600	400	1600
507.cactuBSSN_r	64	183	442	182	444	184	441	32	84.7	479	85.2	476	84.4	480
508.namd_r	64	296	205	297	205	296	205	64	296	205	297	205	296	205
510.parest_r	64	926	181	925	181	926	181	32	389	215	389	215	388	216
511.povray_r	64	461	324	461	324	461	324	64	443	337	442	338	443	338
519.lbm_r	64	319	211	319	211	320	211	64	319	211	319	211	320	211
521.wrf_r	64	451	318	461	311	444	323	32	239	300	250	287	235	305
526.blender_r	64	318	307	317	307	317	307	64	318	307	317	307	317	307
527.cam4_r	64	330	339	330	339	339	330	32	180	310	181	310	181	309
538.imagick_r	64	179	891	178	892	179	890	64	179	891	178	892	179	890
544.nab_r	64	168	641	167	643	168	641	64	168	641	167	643	168	641
549.fotonik3d_r	64	676	369	676	369	676	369	64	676	369	676	369	676	369
554.roms_r	64	638	159	635	160	635	160	32	302	169	301	169	303	168

SPECrate®2017_fp_base = 365

SPECrate®2017_fp_peak = 370

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration

SNC (Sub NUMA) set to Enable SNC2 (2-Clusters)

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on intel Tue Oct 22 01:30:49 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux intel 6.8.0-47-generic #47~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Oct 2 16:16:55 UTC 2 x86_64 x86_64 x86_64 GNU/Linux

2. w
01:30:49 up 6:49, 2 users, load average: 34.97, 56.61, 61.17
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
intel :1 :1 18:42 ?xdm? 25:29 0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel pts/1 - 19:05 6:25m 1.13s 0.01s sudo
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh

3. Username
From environment variable \$USER: root
From the command 'logname': intel

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Platform Notes (Continued)

```

-----
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes) 132061220
process                 4126609
nofiles                 1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                  0

```

```

-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.015/templogs/preenv.fprate.015.0.log --lognum 015.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 5416S
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0005c0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores     : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      64
On-line CPU(s) list:        0-63
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) Gold 5416S
CPU family:                  6
Model:                      143
Thread(s) per core:         2
Core(s) per socket:         16
Socket(s):                   2
Stepping:                   8
CPU max MHz:                 4000.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4000.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                             pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                             xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                             cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                             ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                             tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                             avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                             sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                             cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                             user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                             vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                             vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                             bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   1.5 MiB (32 instances)
L1i cache:                   1 MiB (32 instances)
L2 cache:                    64 MiB (32 instances)
L3 cache:                    60 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-7,32-39
NUMA node1 CPU(s):          8-15,40-47
NUMA node2 CPU(s):          16-23,48-55
NUMA node3 CPU(s):          24-31,56-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:        Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-7,32-39
node 0 size: 257648 MB
node 0 free: 245661 MB
node 1 cpus: 8-15,40-47
node 1 size: 258042 MB
node 1 free: 249431 MB
node 2 cpus: 16-23,48-55
node 2 size: 257999 MB
node 2 free: 249351 MB
node 3 cpus: 24-31,56-63
node 3 size: 258037 MB
node 3 free: 249455 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056489776 kB

10. who -r

run-level 5 Oct 21 18:43

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```

Default Target Status
graphical      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

```

13. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oond systemd-pstore
systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage
udisks2 ufw unattended-upgrades wpa_supplicant

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Platform Notes (Continued)

```

enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled        acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@
                rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
                systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext
                systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
                wpa_supplicant@
generated       apport cpufrequtils loadcpufreq speech-dispatcher
indirect        saned@ spice-vdagentd uidd
masked         alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
                screen-cleanup sudo systemd-rfkill x11-common

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-47-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7

```

```

-----
15. cpupower frequency-info
analyzing CPU 18:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Platform Notes (Continued)

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs   10000

```

```

19. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 22.04.4 LTS

```

```

20. Disk information
   SPEC is set to: /home/speccpu/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda2       ext4  879G  684G  151G  82% /

```

```

21. /sys/devices/virtual/dmi/id
   Vendor:          Fusionstor
   Product:         Invento_i6000
   Product Family:  SG_Intel_EagleStream
   Serial:          HQ3110001BDA03CD0002

```

```

22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x NO DIMM NO DIMM
     16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4400

```

```

23. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      American Megatrends International, LLC.
   BIOS Version:     EG0.10.01
   BIOS Date:        03/22/2024
   BIOS Revision:    5.32

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 365

Invento i6000 (Intel Xeon Gold 5416S)

SPECrate®2017_fp_peak = 370

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Peak Optimization Flags (Continued)

511.povray_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-21 16:00:48-0400.

Report generated on 2025-01-07 11:51:46 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-07.