



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

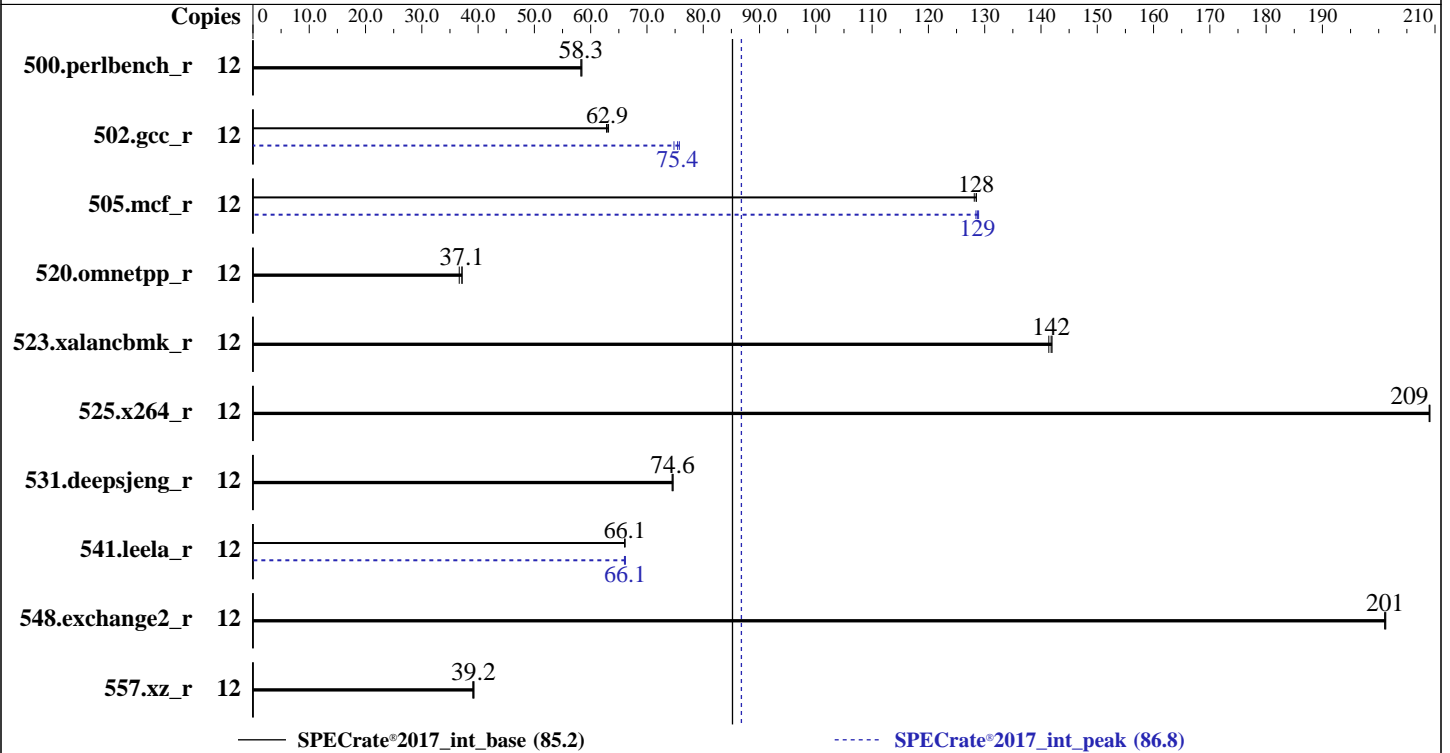

Hardware

CPU Name: AMD EPYC 4244P
 Max MHz: 5100
 Nominal: 3800
 Enabled: 6 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 32 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 5200)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version QIE101W 1.10 released Nov-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: OS set to balance power and performance



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	328	58.3	327	58.4	328	58.3	12	328	58.3	327	58.4	328	58.3
502.gcc_r	12	269	63.2	270	62.9	271	62.8	12	224	75.8	227	74.8	225	75.4
505.mcf_r	12	151	128	151	128	151	129	12	151	129	151	128	150	129
520.omnetpp_r	12	424	37.1	430	36.6	424	37.1	12	424	37.1	430	36.6	424	37.1
523.xalancbmk_r	12	89.3	142	89.4	142	89.6	141	12	89.3	142	89.4	142	89.6	141
525.x264_r	12	100	209	101	209	101	209	12	100	209	101	209	101	209
531.deepsjeng_r	12	185	74.5	184	74.6	184	74.6	12	185	74.5	184	74.6	184	74.6
541.leela_r	12	301	66.1	301	66.1	301	66.0	12	300	66.2	301	66.1	301	66.0
548.exchange2_r	12	156	201	156	201	156	201	12	156	201	156	201	156	201
557.xz_r	12	330	39.3	332	39.1	331	39.2	12	330	39.3	332	39.1	331	39.2

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Apr 23 10:13:13 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36cle09)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 85.2

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Date: Dec-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

```
-----
2. w
  10:13:13 up 14:13,  1 user,  load average: 2.84, 7.72, 7.68
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      pts/0    172.30.81.2   Mon20    13:57m 0.95s  0.03s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
-----
3. Username
  From environment variable $USER:  root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 253433
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 253433
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/bash ./03.local_run_SPECCpu.sh
/bin/bash ./Run025-compliant-amd-rateint.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/templogs/preenv.intrate.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 4244P 6-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 97
stepping       : 2
microcode      : 0xa601209
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 3584 4K pages
cpu cores     : 6
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 85.2

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Date: Dec-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Platform Notes (Continued)

```
siblings          : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                12
On-line CPU(s) list:  0-11
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 4244P 6-Core Processor
BIOS Model name:      AMD EPYC 4244P 6-Core Processor
BIOS CPU family:      107
CPU family:            25
Model:                 97
Thread(s) per core:   2
Core(s) per socket:   6
Socket(s):             1
Stepping:              2
Frequency boost:       enabled
CPU(s) scaling MHz:   61%
CPU max MHz:           5169.3350
CPU min MHz:           3000.0000
BogoMIPS:              7585.39
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16
sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc
arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif
x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid
overflow_recov succor smca flush_l1d
Virtualization:       AMD-V
L1d cache:            192 KiB (6 instances)
L1i cache:            192 KiB (6 instances)
L2 cache:              6 MiB (6 instances)
L3 cache:              32 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):   0-11
Vulnerability Gather data sampling: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Mitigation; Safe RET
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	192K	8	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	1M	6M	8	Unified	2	2048	1	64
L3	32M	32M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 63408 MB
node 0 free: 62846 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 64930484 kB

10. who -r

run-level 3 Apr 22 20:00

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Platform Notes (Continued)

indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=69af5974-2680-4d0c-9805-7dae997bdc7d
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 3:
  current policy: frequency should be within 3.00 GHz and 3.80 GHz.
                  The governor "ondemand" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. sysctl

```
kernel.numa_balancing      0
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness               1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Platform Notes (Continued)

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 893G 43G 851G 5% /

20. /sys/devices/virtual/dmi/id
Vendor: LENOVO
Product: ThinkSystem ST45 V3
Product Family: ThinkSystem
Serial: INVALID

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
2x SK Hynix HMC88AGBEA084N 32 GB 2 rank 5600, configured at 5200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: LENOVO
BIOS Version: QIE101W-1.10
BIOS Date: 11/11/2024
BIOS Revision: 1.10
Firmware Revision: 12.65
ST45 V3 CPU performance result based on 65W maximum consumption limit.

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
C | 502.gcc_r(peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 85.2

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

```

C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 85.2

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 85.2

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Date: Dec-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Dec-2024

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3
(3.80 GHz, AMD EPYC 4244P)

SPECrate®2017_int_base = 85.2

SPECrate®2017_int_peak = 86.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2024

Hardware Availability: Dec-2024

Software Availability: Oct-2024

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-C.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-22 22:13:13-0400.

Report generated on 2025-01-15 12:32:21 by CPU2017 PDF formatter v6716.

Originally published on 2025-01-14.