



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865


Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

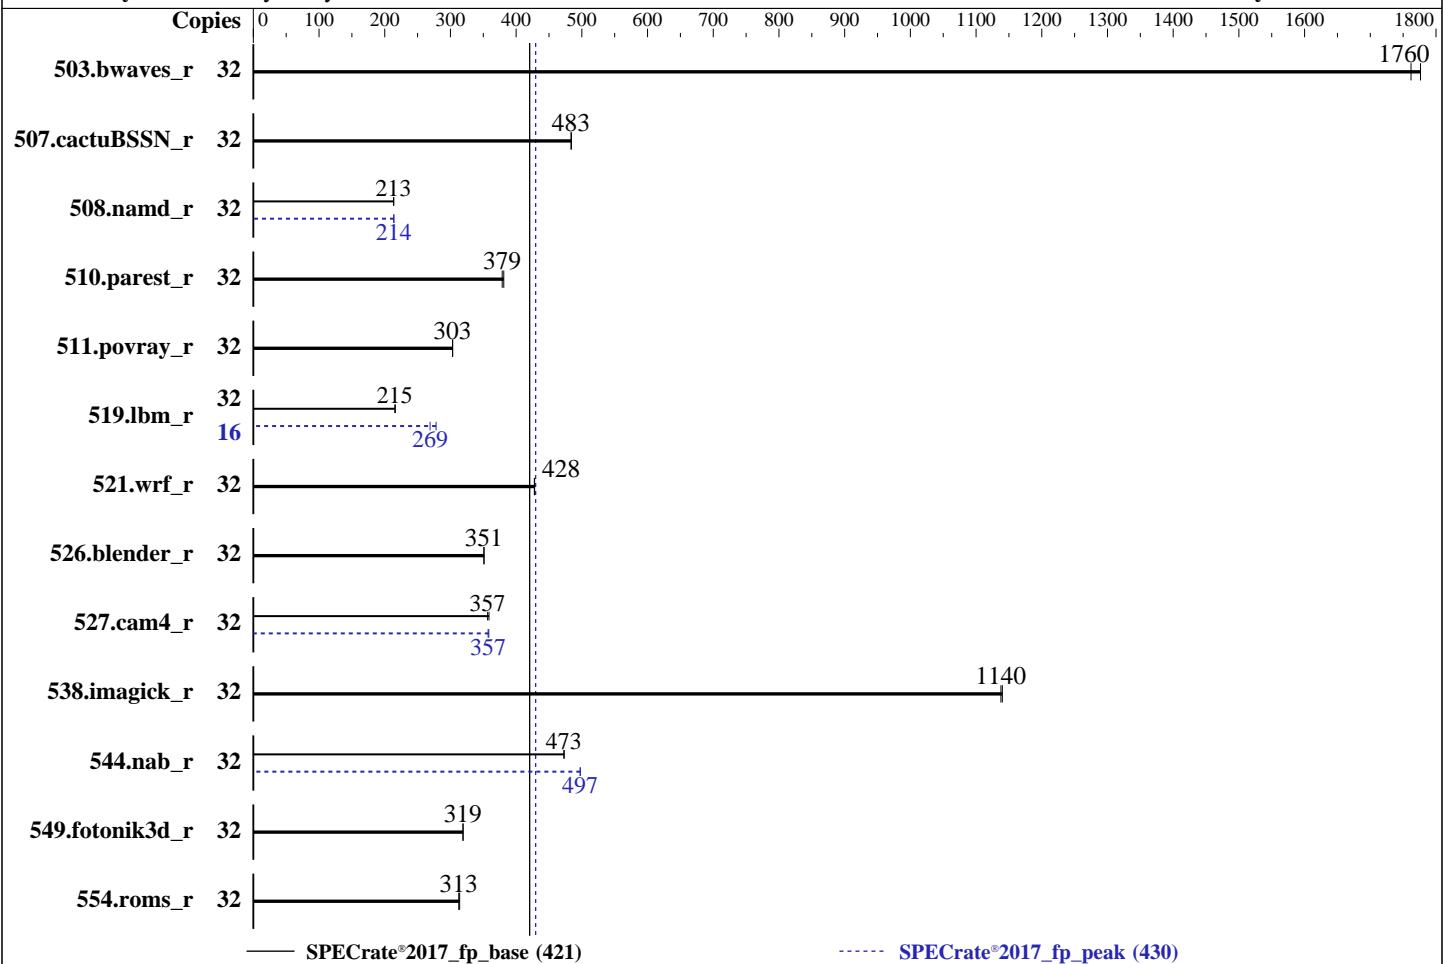

Hardware	
CPU Name:	AMD EPYC 9175F
Max MHz:	5000
Nominal:	4200
Enabled:	16 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	512 MB I+D on chip per chip, 32 MB shared / 1 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage:	1 x 960 GB NVME SSD
Other:	CPU Cooling: Air

Software	
OS:	SUSE Linux Enterprise Server 15 SP6
Compiler:	6.4.0-150600.21-default
Parallel:	C/C++/Fortran: Version 5.0.0 of AOCC
Firmware:	No
File System:	Version 01.04.00 released Dec-2024
System State:	btrfs
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	64-bit
Other:	64-bit
Power Management:	None
	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	182	1760	181	1780			32	182	1760	181	1780		
507.cactubSSN_r	32	83.7	484	83.8	483			32	83.7	484	83.8	483		
508.namd_r	32	142	214	143	213			32	142	214	142	214		
510.parest_r	32	220	381	221	379			32	220	381	221	379		
511.povray_r	32	246	303	246	303			32	246	303	246	303		
519.lbm_r	32	157	215	156	216			16	62.7	269	60.6	278		
521.wrf_r	32	167	428	168	428			32	167	428	168	428		
526.blender_r	32	139	351	139	351			32	139	351	139	351		
527.cam4_r	32	156	359	157	357			32	157	357	156	358		
538.imagick_r	32	69.8	1140	69.9	1140			32	69.8	1140	69.9	1140		
544.nab_r	32	114	473	114	473			32	108	497	108	498		
549.fotonik3d_r	32	390	319	391	319			32	390	319	391	319		
554.roms_r	32	163	313	162	314			32	163	313	162	314		

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 430

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

SVM Mode = disable

DRAM Scrub time = disable

NUMA nodes per socket = NPS4

Determinism Slider = Power

cTDP = 500

Package Power Limit = 500

```
Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Apr 22 10:08:34 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
 10:08:34 up 2:08, 1 user, load average: 22.15, 29.45, 30.92
USER   TTY      FROM          LOGIN@    IDLE   JCPU   PCPU WHAT
root   tty1     -           08:05     2:02m  0.85s  0.12s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 3092270
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 3092270
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 1 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 1 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9175F 16-Core Processor  
vendor_id       : AuthenticAMD  
cpu family     : 26  
model          : 2  
stepping        : 1  
microcode       : 0xb00211a  
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size        : 192 4K pages  
cpu cores      : 16  
siblings        : 32  
1 physical ids (chips)  
32 processors (hardware threads)  
physical id 0: core ids 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120  
physical id 0: apicids  
0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113,128-129,144-145,160-161,176-177,192-193,208-209,224-225,2  
40-241
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.39.3:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         52 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                32  
On-line CPU(s) list:  0-31  
Vendor ID:             AuthenticAMD  
BIOS Vendor ID:       Advanced Micro Devices, Inc.  
Model name:            AMD EPYC 9175F 16-Core Processor  
BIOS Model name:      AMD EPYC 9175F 16-Core Processor  
BIOS CPU family:      107  
CPU family:            26  
Model:                 2  
Thread(s) per core:   2  
Core(s) per socket:   16  
Socket(s):            1  
Stepping:              1  
Frequency boost:      enabled  
CPU(s) scaling MHz:  87%  
CPU max MHz:          5003.9058  
CPU min MHz:          1500.0000  
BogoMIPS:              8387.63  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat  
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb  
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid  
extd_apicid aperfmpfperf rapl_pni pclmulqdq monitor ssse3 fma cx16 pcid  
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm  
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch  
osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext  
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2  
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2  
smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt  
xsavec xgetbv1 xsaves cqmq_llc cqmq_occult_llc cqmq_mbm_total  
cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
xsaverptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
```

Virtualization:

L1d cache: 768 KiB (16 instances)

L1i cache: 512 KiB (16 instances)

L2 cache: 16 MiB (16 instances)

L3 cache: 512 MiB (16 instances)

NUMA node(s): 4

NUMA node0 CPU(s): 0-3,16-19

NUMA node1 CPU(s): 4-7,20-23

NUMA node2 CPU(s): 8-11,24-27

NUMA node3 CPU(s): 12-15,28-31

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability Llft: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Not affected

Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation: Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-3,16-19

node 0 size: 192986 MB

node 0 free: 192469 MB

node 1 cpus: 4-7,20-23

node 1 size: 193495 MB

node 1 free: 193030 MB

node 2 cpus: 8-11,24-27

node 2 size: 193533 MB

node 2 free: 193030 MB

node 3 cpus: 12-15,28-31

node 3 size: 193077 MB

node 3 free: 192419 MB

node distances:

node 0 1 2 3

0: 10 12 12 12

1: 12 10 12 12

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

2: 12 12 10 12
3: 12 12 12 10

9. /proc/meminfo
MemTotal: 791646680 kB

10. who -r
run-level 3 Apr 22 08:00

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels
rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebtables
exchange-bmc-os-info fsidd grub2-once haveged hwloc-dump-hwdata ipmievd issue-add-ssh-keys
kexec-load nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd tuned
generated jexec
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=daf71402-9a22-417d-a498-881cf3539e73
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=384M,high
crashkernel=72M,low

14. cpupower frequency-info
analyzing CPU 30:
current policy: frequency should be within 1.50 GHz and 4.20 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages   0
vm.swappiness                 1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag           [always] defer defer+madvise madvise never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6

-----
20. Disk information
    SPEC is set to: /home/CPU2017
    Filesystem  Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p2  btrfs  892G  36G  853G  5%  /home

-----
21. /sys/devices/virtual/dmi/id
    Vendor:      KAYTUS
    Product:     KR1180-E3-A0-R0-00
    Product Family: Not specified
    Serial:      012345678

-----
22. dmidecode
    Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_base = 421

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Platform Notes (Continued)

"DMTF SMBIOS" standard.

Memory:

12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: 01.04.00

BIOS Date: 12/09/2024

The system clock was not calibrated, the actual date the benchmarks were run is Feb-2025

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -ldl

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

```
510.parest_r: basepeak = yes
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes
```

```
549.fotonik3d_r: basepeak = yes
```

```
554.roms_r: basepeak = yes
```

Benchmarks using both Fortran and C:

```
521.wrf_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc  
-ldl -lflang
```

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECCrate®2017_fp_base = 421

KR1180V3 (AMD EPYC 9175F)

SPECCrate®2017_fp_peak = 430

CPU2017 License: 6865

Test Date: Feb-2025

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Feb-2025

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Oct-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-22 10:08:34-0400.

Report generated on 2025-03-26 10:32:46 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.