



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant Compute DL320 Gen12

(2.10 GHz, Intel Xeon 6740P)

## SPECrate®2017\_fp\_base = 628

## SPECrate®2017\_fp\_peak = 644

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

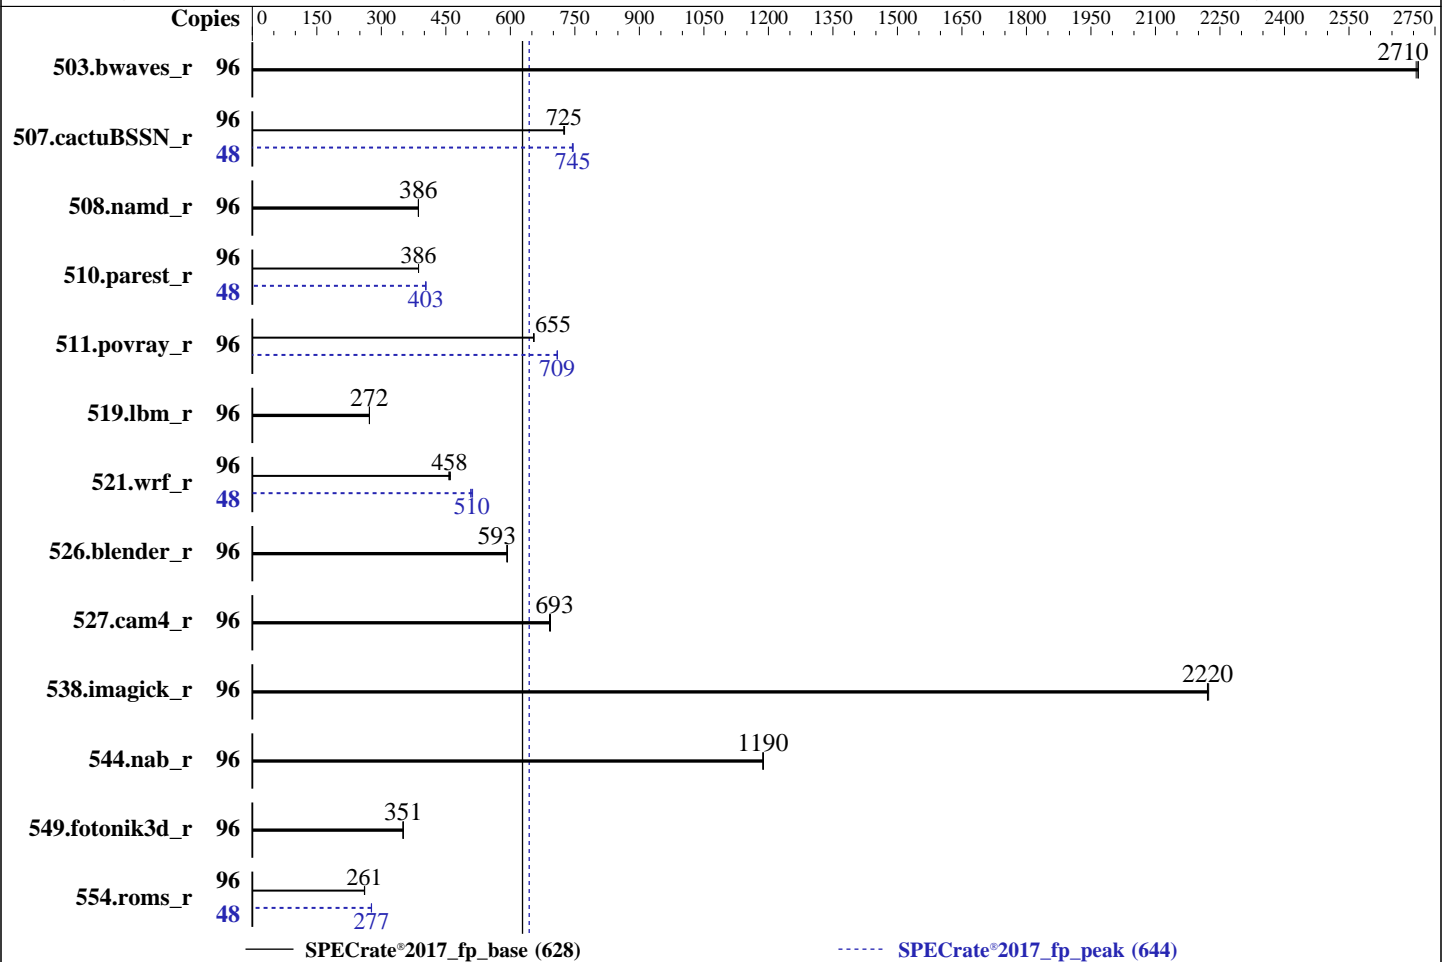

### Hardware

CPU Name: Intel Xeon 6740P  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 48 cores, 1 chip, 2 threads/core  
 Orderable: 1 Chip  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 288 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 1 x 1.2 TB NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12  
(2.10 GHz, Intel Xeon 6740P)

SPECrate®2017\_fp\_base = 628

SPECrate®2017\_fp\_peak = 644

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	355	2710	356	2710	<u>355</u>	<u>2710</u>	96	355	2710	356	2710	<u>355</u>	<u>2710</u>
507.cactuBSSN_r	96	168	724	167	726	<u>168</u>	<u>725</u>	48	81.7	744	81.5	746	<u>81.5</u>	<u>745</u>
508.namd_r	96	236	386	<u>236</u>	<u>386</u>	236	386	96	236	386	<u>236</u>	<u>386</u>	236	386
510.parest_r	96	<u>650</u>	<u>386</u>	650	386	650	386	48	311	404	311	403	<u>311</u>	<u>403</u>
511.povray_r	96	343	654	342	655	<u>342</u>	<u>655</u>	96	316	710	<u>316</u>	<u>709</u>	316	709
519.lbm_r	96	371	272	372	272	<u>372</u>	<u>272</u>	96	371	272	372	272	<u>372</u>	<u>272</u>
521.wrf_r	96	<u>469</u>	<u>458</u>	471	457	467	461	48	210	512	212	508	<u>211</u>	<u>510</u>
526.blender_r	96	246	593	247	592	<u>247</u>	<u>593</u>	96	246	593	247	592	<u>247</u>	<u>593</u>
527.cam4_r	96	243	691	<u>242</u>	<u>693</u>	242	693	96	243	691	<u>242</u>	<u>693</u>	242	693
538.imagick_r	96	108	2220	107	2220	<u>107</u>	<u>2220</u>	96	108	2220	107	2220	<u>107</u>	<u>2220</u>
544.nab_r	96	136	1190	<u>136</u>	<u>1190</u>	136	1190	96	136	1190	<u>136</u>	<u>1190</u>	136	1190
549.fotonik3d_r	96	1068	350	1066	351	<u>1066</u>	<u>351</u>	96	1068	350	1066	351	<u>1066</u>	<u>351</u>
554.roms_r	96	585	261	584	261	<u>585</u>	<u>261</u>	48	275	277	<u>275</u>	<u>277</u>	275	277

SPECrate®2017\_fp\_base = **628**

SPECrate®2017\_fp\_peak = **644**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute  
Enhanced Processor Performance Profile set to Aggressive  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
Last Level Cache (LLC) Prefetch set to Enabled  
XPT Prefetch set to Disabled  
Workload Profile set to Custom  
DCU Stream Prefetcher set to Disabled  
Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sat Mar 8 17:32:05 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
17:32:05 up 5:23, 6 users, load average: 59.50, 87.08, 92.35  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 1030660
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 1030660
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpratespron.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.007/templogs/preenv.fprate.007.0.log --lognum 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6740P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 48
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23,64-87
physical id 0: apicids 0-47,128-175
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6740P
BIOS Model name:      Intel(R) Xeon(R) 6740P  CPU @ 2.1GHz
BIOS CPU family:      179
CPU family:            6
Model:                 173
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):             1
Stepping:              1
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                    pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                    nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                    pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                    xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                    tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                    3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                    ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                    vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
                    rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                    clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                    vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                    rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                    amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             2.3 MiB (48 instances)
L1i cache:             3 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              288 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):    0-23,48-71
NUMA node1 CPU(s):    24-47,72-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                    PBRSE-eIBRS Not affected; BHI BHI_DIS_S

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	64K	3M	16	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	288M	288M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 128700 MB
node 0 free: 106363 MB
node 1 cpus: 24-47,72-95
node 1 size: 128989 MB
node 1 free: 108974 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

9. /proc/meminfo

MemTotal: 263874388 kB

10. who -r

run-level 3 Apr 22 17:30

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections
                nvmmf-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4
                wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
                haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load rpmconfigcheck serial-getty@
                systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd
indirect       systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=6815926d-0e31-407c-9bfc-7d4c1d8acd7f
splash=silent
resume=/dev/disk/by-uuid/3ddd6c4a-76f7-4f45-b79b-814fe2bce522
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```

-----
14. cpupower frequency-info
analyzing CPU 58:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p4 xfs 1.2T 245G 954G 21% /home

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant Compute DL320 Gen12

(2.10 GHz, Intel Xeon 6740P)

SPECrate®2017\_fp\_base = 628

SPECrate®2017\_fp\_peak = 644

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id

Vendor: HPE  
Product: HPE ProLiant Compute DL320 Gen12  
Product Family: ProLiant  
Serial: FLLKN48DYT

21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.20  
BIOS Date: 02/14/2025  
BIOS Revision: 1.20  
Firmware Revision: 1.10

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Compiler Version Notes (Continued)

-----  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

-----  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Base Portability Flags (Continued)

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs

-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Peak Optimization Flags (Continued)

508.namd\_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.10 GHz, Intel Xeon 6740P)

**SPECrate®2017\_fp\_base = 628**

**SPECrate®2017\_fp\_peak = 644**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-08 07:02:04-0500.

Report generated on 2025-04-09 14:58:03 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.