



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant Compute DL320 Gen12


(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

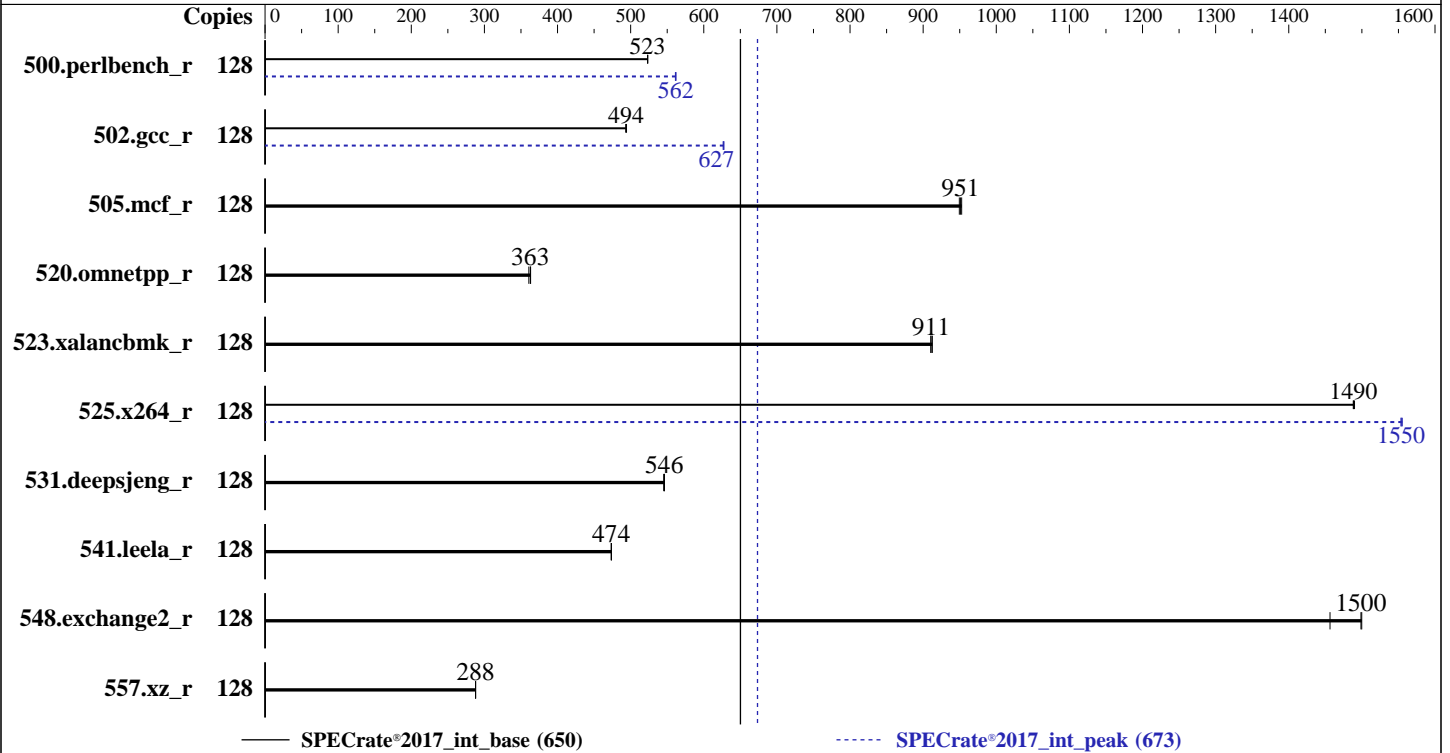

### Hardware

CPU Name: Intel Xeon 6760P  
Max MHz: 3800  
Nominal: 2200  
Enabled: 64 cores, 1 chip, 2 threads/core  
Orderable: 1 Chip  
Cache L1: 64 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 320 MB I+D on chip per chip  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)  
Storage: 1 x 1.2 TB NVMe SSD  
Other: CPU Cooling: CLC

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>389</b>	<b>523</b>	389	523	390	523	128	363	562	<b>363</b>	<b>562</b>	363	561
502.gcc_r	128	367	493	367	494	<b>367</b>	<b>494</b>	128	289	626	289	627	<b>289</b>	<b>627</b>
505.mcf_r	128	<b>217</b>	<b>951</b>	217	953	218	949	128	<b>217</b>	<b>951</b>	217	953	218	949
520.omnetpp_r	128	466	361	462	363	<b>463</b>	<b>363</b>	128	466	361	462	363	<b>463</b>	<b>363</b>
523.xalancbmk_r	128	<b>148</b>	<b>911</b>	148	913	148	910	128	<b>148</b>	<b>911</b>	148	913	148	910
525.x264_r	128	150	1490	<b>151</b>	<b>1490</b>	151	1490	128	144	1550	144	1560	<b>144</b>	<b>1550</b>
531.deepsjeng_r	128	269	546	269	545	<b>269</b>	<b>546</b>	128	269	546	269	545	<b>269</b>	<b>546</b>
541.leela_r	128	<b>448</b>	<b>474</b>	447	474	448	473	128	<b>448</b>	<b>474</b>	447	474	448	473
548.exchange2_r	128	<b>224</b>	<b>1500</b>	230	1460	224	1500	128	<b>224</b>	<b>1500</b>	230	1460	224	1500
557.xz_r	128	480	288	480	288	<b>480</b>	<b>288</b>	128	480	288	480	288	<b>480</b>	<b>288</b>

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute  
Enhanced Processor Performance Profile set to Aggressive  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
Last Level Cache (LLC) Prefetch set to Enabled  
XPT Prefetch set to Disabled  
Workload Profile set to Custom  
DCU Stream Prefetcher set to Disabled  
Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Mar 13 01:20:54 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
01:20:54 up 3 min, 4 users, load average: 0.03, 0.10, 0.05  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
-----

3. Username  
From environment variable \$USER: root  
-----

4. ulimit -a  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

```

core file size      (blocks, -c) unlimited
data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 1030551
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 1030551
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/intratespron.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.017/templots/preenv.intrate.017.0.log --lognum 017.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6760P
vendor_id      : GenuineIntel
cpu family      : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 64
siblings       : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 0: apicids 0-63,128-191

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL320 Gen12  
(2.20 GHz, Intel Xeon 6760P)

SPECrate®2017\_int\_base = 650

SPECrate®2017\_int\_peak = 673

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    128
On-line CPU(s) list:      0-127
Vendor ID:                 GenuineIntel
BIOS Vendor ID:          Intel(R) Corporation
Model name:               Intel(R) Xeon(R) 6760P
BIOS Model name:         Intel(R) Xeon(R) 6760P  CPU @ 2.2GHz
BIOS CPU family:         179
CPU family:               6
Model:                    173
Thread(s) per core:      2
Core(s) per socket:      64
Socket(s):               1
Stepping:                 1
BogoMIPS:                 4400.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                          pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                          nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                          pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                          xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                          tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                          3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                          ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                          vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
                          rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                          clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                          xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                          split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                          arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                          gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                          la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                          md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                          amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:           VT-x
L1d cache:                3 MiB (64 instances)
L1i cache:                4 MiB (64 instances)
L2 cache:                 128 MiB (64 instances)
L3 cache:                 320 MiB (1 instance)
NUMA node(s):             2
NUMA node0 CPU(s):       0-31,64-95
NUMA node1 CPU(s):       32-63,96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                          PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:  
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

L1d	48K	3M	12 Data	1	64	1	64
L1i	64K	4M	16 Instruction	1	64	1	64
L2	2M	128M	16 Unified	2	2048	1	64
L3	320M	320M	16 Unified	3	327680	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 128734 MB
node 0 free: 128040 MB
node 1 cpus: 32-63,96-127
node 1 size: 128928 MB
node 1 free: 128018 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

### 9. /proc/meminfo

MemTotal: 263846632 kB

### 10. who -r

run-level 3 Apr 22 17:30

### 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections
nvme-f-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load rpmconfigcheck serial-getty@
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
indirect systemd-userdbd wickedd

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=84964d71-b738-4181-8365-490a27ae412d
splash=silent
resume=/dev/disk/by-uuid/d32c8d7d-0388-4dc2-a4d2-6ac3b24bfd85
mitigations=auto
quiet
security=apparmor

```

### 14. cpupower frequency-info

```

analyzing CPU 55:
Unable to determine current policy

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

boost state support:  
Supported: yes  
Active: yes

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4 xfs   1.2T  249G  949G  21% /home

-----
20. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     HPE ProLiant Compute DL320 Gen12
Product Family: ProLiant
Serial:      S84PQDRU0T
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.20  
BIOS Date: 02/14/2025  
BIOS Revision: 1.20  
Firmware Revision: 1.11

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Compiler Version Notes (Continued)

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

```
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL320 Gen12**

(2.20 GHz, Intel Xeon 6760P)

**SPECrate®2017\_int\_base = 650**

**SPECrate®2017\_int\_peak = 673**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-12 15:50:53-0400.

Report generated on 2025-04-09 14:57:42 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.