



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573


Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

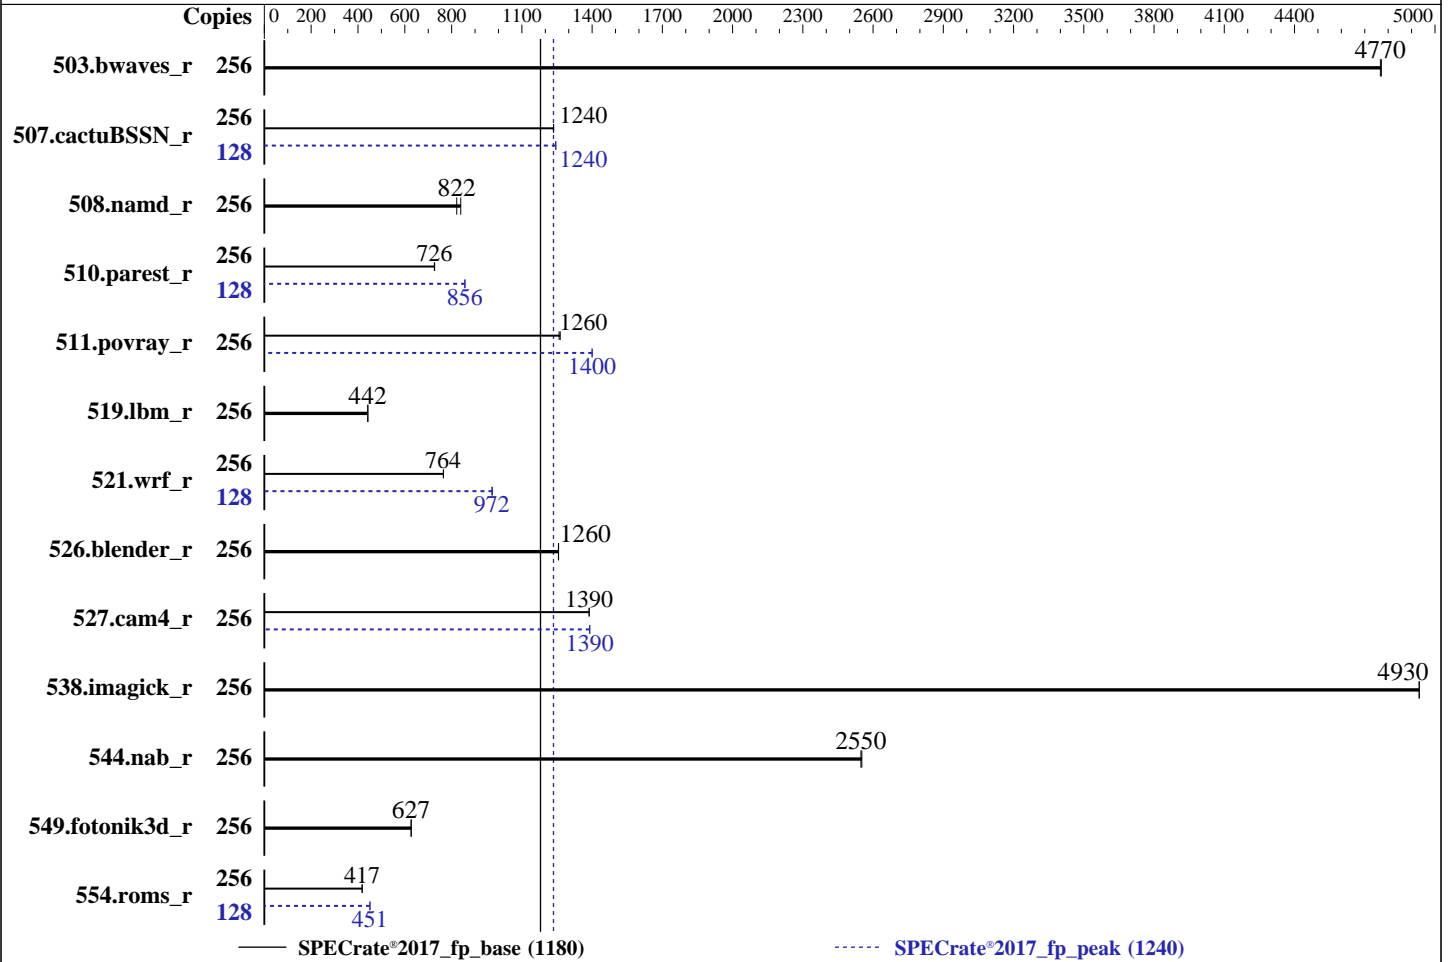

Hardware

CPU Name: Intel Xeon Platinum 8592+
 Max MHz: 3900
 Nominal: 1900
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)
 Storage: 140 GB on tmpfs
 Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 2.4.4 released Sep-2024
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Feb-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	539	4770	538	4770			256	539	4770	538	4770		
507.cactuBSSN_r	256	262	1240	262	1240			128	130	1240	130	1250		
508.namd_r	256	296	822	290	839			256	296	822	290	839		
510.parest_r	256	921	728	922	726			128	391	856	390	858		
511.povray_r	256	473	1260	475	1260			256	427	1400	427	1400		
519.lbm_r	256	610	442	611	442			256	610	442	611	442		
521.wrf_r	256	750	764	749	765			128	295	972	294	974		
526.blender_r	256	310	1260	310	1260			256	310	1260	310	1260		
527.cam4_r	256	323	1390	323	1390			256	322	1390	322	1390		
538.imagick_r	256	129	4930	129	4930			256	129	4930	129	4930		
544.nab_r	256	169	2550	169	2550			256	169	2550	169	2550		
549.fotonik3d_r	256	1592	627	1590	627			256	1592	627	1590	627		
554.roms_r	256	973	418	975	417			128	451	451	451	451		

SPECrate®2017_fp_base = 1180

SPECrate®2017_fp_peak = 1240

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOCCONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 140 GB ramdisk created with the cmd: "mount -t tmpfs -o size=140G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

DCU Streamer Prefetcher : Disabled
Sub NUMA Cluster : 2-Way Clustering
UMA Based Clustering Status : Disable
Dead Line LLC Alloc : Disabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
C1E : Disabled
C-States : Autonomous

Memory Patrol Scrub : Disabled
Energy Efficient Policy : Performance
PCI ASPM L1 Link Power Management : Disabled
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on J84VYS3-C6620 Wed Mar 12 13:54:14 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Feb-2024
Software Availability: Jun-2024

Platform Notes (Continued)

- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux J84VYS3-C6620 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:54:14 up 4:58, 1 user, load average: 173.79, 236.27, 248.08
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttyl - 08:57 4:22m 1.16s 0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.2_T4 --output_format html,pdf,txt
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2061358
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2061358
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.2_T4 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.2_T4 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-VERS=6.2_T4 --output_format html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```
--define DL-VERS=6.2_T4 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
refrate fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log
--lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000283
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      46 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             256
On-line CPU(s) list: 0-255
Vendor ID:          GenuineIntel
BIOS Vendor ID:    Intel
Model name:         INTEL(R) XEON(R) PLATINUM 8592+
BIOS Model name:    INTEL(R) XEON(R) PLATINUM 8592+  CPU @ 1.9GHz
BIOS CPU family:    179
CPU family:         6
Model:              207
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s):          2
Stepping:           2
BogoMIPS:           3800.00
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Feb-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities
```

Virtualization:

VT-x

L1d cache:

6 MiB (128 instances)

L1i cache:

4 MiB (128 instances)

L2 cache:

256 MiB (128 instances)

L3 cache:

640 MiB (2 instances)

NUMA node(s):

4

NUMA node0 CPU(s):

0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 88, 92, 96, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144, 148, 152, 156, 160, 164, 168, 172, 176, 180, 184, 188, 192, 196, 200, 204, 208, 212, 216, 220, 224, 228, 232, 236, 240, 244, 248, 252

NUMA node1 CPU(s):

2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86, 90, 94, 98, 102, 106, 110, 114, 118, 122, 126, 130, 134, 138, 142, 146, 150, 154, 158, 162, 166, 170, 174, 178, 182, 186, 190, 194, 198, 202, 206, 210, 214, 218, 222, 226, 230, 234, 238, 242, 246, 250, 254

NUMA node2 CPU(s):

1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 45, 49, 53, 57, 61, 65, 69, 73, 77, 81, 85, 89, 93, 97, 101, 105, 109, 113, 117, 121, 125, 129, 133, 137, 141, 145, 149, 153, 157, 161, 165, 169, 173, 177, 181, 185, 189, 193, 197, 201, 205, 209, 213, 217, 221, 225, 229, 233, 237, 241, 245, 249, 253

NUMA node3 CPU(s):

3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 47, 51, 55, 59, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 107, 111, 115, 119, 123, 127, 131, 135, 139, 143, 147, 151, 155, 159, 163, 167, 171, 175, 179, 183, 187, 191, 195, 199, 203, 207, 211, 215, 219, 223, 227, 231, 235, 239, 243, 247, 251, 255

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus:

0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 88, 92, 96, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144, 148, 152, 156, 160, 164, 168, 172, 176, 180, 184, 188, 192, 196, 200, 204, 208, 212, 216, 220, 224, 228, 232, 236, 240, 244, 248, 252

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Feb-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

node 0 size: 128459 MB
node 0 free: 127297 MB
node 1 cpus:
2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110,114,118,122,126,130,134,138,142,146,150,154,158,162,166,170,174,178,182,186,190,194,198,202,206,210,214,218,222,226,230,234,238,242,246,250,254
node 1 size: 129007 MB
node 1 free: 128354 MB
node 2 cpus:
1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,113,117,121,125,129,133,137,141,145,149,153,157,161,165,169,173,177,181,185,189,193,197,201,205,209,213,217,221,225,229,233,237,241,245,249,253
node 2 size: 128968 MB
node 2 free: 117642 MB
node 3 cpus:
3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111,115,119,123,127,131,135,139,143,147,151,155,159,163,167,171,175,179,183,187,191,195,199,203,207,211,215,219,223,227,231,235,239,243,247,251,255
node 3 size: 128930 MB
node 3 free: 127550 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

```

-----
9. /proc/meminfo
   MemTotal:      527735248 kB

```

```

-----
10. who -r
    run-level 3 Mar 12 08:57

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime                     systemd-remount-fs
disabled                             autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd
vncserver@
indirect                             systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

Platform Notes (Continued)

```
root=UUID=52342675-8d74-47bd-8d2b-87098323f985
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 60:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

Platform Notes (Continued)

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	140G	5.0G	136G	4%	/mnt/ramdisk

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge C6620
Product Family: PowerEdge
Serial:      J84VYS3
-----

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
1x 002C0632002C MTC20F2085S1RC56BG1 32 GB 2 rank 5600
1x 00CE042300CE M321R4GA3PB0-CWMCH 32 GB 2 rank 5600
14x 00CE063200CE M321R4GA3PB0-CWMKH 32 GB 2 rank 5600
-----

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     2.4.4
BIOS Date:        09/27/2024
BIOS Revision:    2.4
-----

```

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
 Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

 Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

 Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

Base Portability Flags (Continued)

```

508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

```
538.imagick_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1180

PowerEdge C6620 (Intel Xeon Platinum 8592+)

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Feb-2024

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-12 14:54:14-0400.

Report generated on 2025-04-09 14:58:34 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.