



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 20


Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

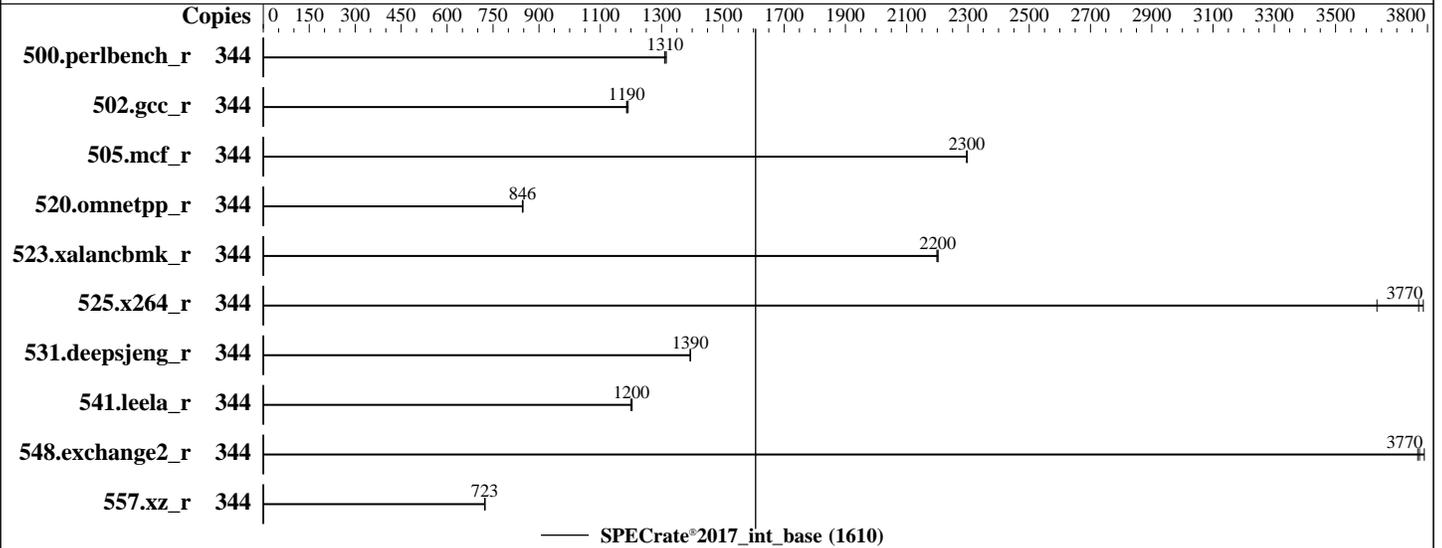

### Hardware

CPU Name: Intel Xeon 6787P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 172 cores, 2 chips, 2 threads/core  
 Orderable: 2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-88/56B-M, running at 8000 )  
 Storage: 1920 GB Micron 7450 NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.1 (Plow)  
 5.14.0-162.6.1.el9\_1.x86\_64  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version BIOS\_BHS120.72.02.004 released Apr-2025  
 File System: xfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 20  
Test Sponsor: Bull SAS  
Tested by: Bull SAS

Test Date: Apr-2025  
Hardware Availability: Mar-2025  
Software Availability: Mar-2024

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	344	416	1320	<b><u>417</u></b>	<b><u>1310</u></b>	418	1310							
502.gcc_r	344	409	1190	411	1190	<b><u>411</u></b>	<b><u>1190</u></b>							
505.mcf_r	344	242	2300	<b><u>242</u></b>	<b><u>2300</u></b>	242	2300							
520.omnetpp_r	344	532	848	534	846	<b><u>533</u></b>	<b><u>846</u></b>							
523.xalancbmk_r	344	165	2200	<b><u>165</u></b>	<b><u>2200</u></b>	165	2200							
525.x264_r	344	166	3640	<b><u>160</u></b>	<b><u>3770</u></b>	159	3790							
531.deepsjeng_r	344	283	1390	<b><u>283</u></b>	<b><u>1390</u></b>	283	1390							
541.leela_r	344	475	1200	<b><u>474</u></b>	<b><u>1200</u></b>	473	1200							
548.exchange2_r	344	239	3770	238	3790	<b><u>239</u></b>	<b><u>3770</u></b>							
557.xz_r	344	513	724	<b><u>514</u></b>	<b><u>723</u></b>	514	723							

SPECrate®2017\_int\_base = 1610

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPEC/lib/intel64:/home/SPEC/lib/ia32:/home/SPEC/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

### Platform Notes

BIOS Configuration:  
DCU Streamer Prefetcher = Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

### Platform Notes (Continued)

SNC = Enabled  
Power Performance Tuning = BIOS controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Hyper Performance  
Package C State = C0/C1 state

Sysinfo program /home/SPEC/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on tournesol Thu Apr 10 00:50:44 2025

SUT (System Under Test) info as seen by some common utilities.

#### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-12.el9\_1)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux tournesol 5.14.0-162.6.1.el9_1.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Sep 30 07:36:03 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
00:50:44 up 1 day, 7:07, 1 user, load average: 0.16, 0.06, 0.02
USER      TTY      LOGIN@   IDLE   JCPU   PCPU WHAT
root      pts/0    00:46    52.00s  1.25s  0.00s tail -f nohup.out
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 20  
**Test Sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test Date:** Apr-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```

file size                (blocks, -f) unlimited
pending signals          (-i) 2059741
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 16384
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2059741
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
bash run_one_rate.sh 3 intrate
runcpu --define default-platform-flags --copies 344 --configfile mesca6_2S --define smt-on --define numactl
--define cores=172 --define invoke_with_interleave --define drop_caches --iterations=3 --reportable
--size=ref --tune base -o all intrate
runcpu --define default-platform-flags --copies 344 --configfile mesca6_2S --define smt-on --define numactl
--define cores=172 --define invoke_with_interleave --define drop_caches --iterations 3 --reportable --size
ref --tune base --output_format all --nopower --runmode rate --tune base --size refrate intrate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.078/templogs/preenv.intrate.078.0.log --lognum 078.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/SPEC

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6787P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping      : 1
microcode     : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 86
siblings      : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 20  
**Test Sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test Date:** Apr-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    344
On-line CPU(s) list:      0-343
Vendor ID:                 GenuineIntel
BIOS Vendor ID:          Intel(R) Corporation
Model name:               Intel(R) Xeon(R) 6787P
BIOS Model name:         Intel(R) Xeon(R) 6787P
CPU family:               6
Model:                    173
Thread(s) per core:      2
Core(s) per socket:      86
Socket(s):                2
Stepping:                 1
CPU max MHz:              3800.0000
CPU min MHz:              800.0000
BogoMIPS:                 4000.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                          clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                          lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                          nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                          ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                          sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                          lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                          invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                          vmmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                          erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                          clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                          xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
                          avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                          hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                          vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                          bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                          tsxldtrk pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                          arch_capabilities
Virtualization:           VT-x
L1d cache:                8.1 MiB (172 instances)
L1i cache:                10.8 MiB (172 instances)
L2 cache:                 344 MiB (172 instances)
L3 cache:                 672 MiB (2 instances)
NUMA node(s):            4
NUMA node0 CPU(s):       0-42,172-214
NUMA node1 CPU(s):       43-85,215-257
NUMA node2 CPU(s):       86-128,258-300
NUMA node3 CPU(s):       129-171,301-343
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS Not
                          affected
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 8.1M 12 Data 1 64 1 64

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

### Platform Notes (Continued)

L1i	64K	10.8M	16 Instruction	1	64	1	64
L2	2M	344M	16 Unified	2	2048	1	64
L3	336M	672M	16 Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 128013 MB
node 0 free: 125958 MB
node 1 cpus: 43-85,215-257
node 1 size: 129005 MB
node 1 free: 128087 MB
node 2 cpus: 86-128,258-300
node 2 size: 129005 MB
node 2 free: 128226 MB
node 3 cpus: 129-171,301-343
node 3 size: 128974 MB
node 3 free: 128223 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

```

9. /proc/meminfo

MemTotal: 527358400 kB

10. who -r

run-level 5 Apr 8 17:44

11. Systemd service manager version: systemd 250 (250-12.el9\_1)

```

Default Target Status
graphical running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq iprdump iprinit iprupdate iscsid iscsiuiop kpatch kvm_stat
ledmon man-db-restart-cache-update ndctl-monitor netavark-dhcp-proxy
netavark-firewalld-reload nftables nvme-autoconnect ostree-readonly-sysroot-migration
ostree-state-overlay@ podman podman-auto-update podman-clean-transient podman-kube@
podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
systemd-sysextr wpa_supplicant

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 20

**Test Sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Mar-2024

### Platform Notes (Continued)

```
indirect      serial-getty@ spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
              sssd-sudo
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-162.6.1.el9_1.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
udev.children-max=64
console=tty0
console=ttyS0
tsc=nowatchdog
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Bull SAS

SPECrate®2017\_int\_base = 1610

## BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

### Platform Notes (Continued)

hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.1 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.1 (Plow)  
system-release Red Hat Enterprise Linux release 9.1 (Plow)  
-----

-----  
20. Disk information  
SPEC is set to: /home/SPEC  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 1.7T 868G 845G 51% /home  
-----

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: BULL  
Product: BullSequana SH series  
Product Family: -  
Serial: XAN-S60-00045  
-----

-----  
22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Micron MTC20F2085S1HC88XD1 WFFFG 32 GB 2 rank 8800, configured at 8000  
-----

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: BULL  
BIOS Version: BIOS\_BHS120.72.02.004-D  
BIOS Date: 04/04/2025  
BIOS Revision: 48.72  
-----

### Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Bull SAS**

SPECrate®2017\_int\_base = 1610

**BullSequana SH21 (Intel Xeon 6787P)**

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

## Compiler Version Notes (Continued)

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502 gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Bull SAS**

SPECrate®2017\_int\_base = 1610

**BullSequana SH21 (Intel Xeon 6787P)**

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 20

**Test Sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test Date:** Apr-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Mar-2024

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/BullSequanaSH-Flags-V1.5.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/BullSequanaSH-Flags-V1.5.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-09 18:50:44-0400.

Report generated on 2025-07-01 19:08:27 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.