



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20


Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

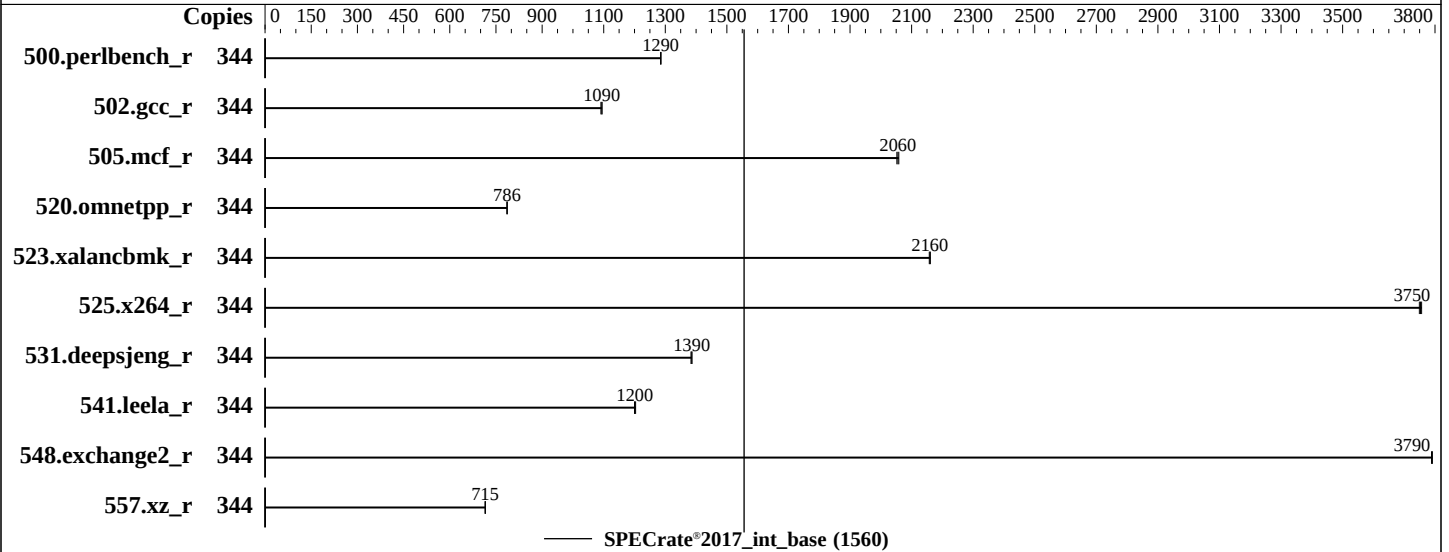

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1920 GB Micron 7450 NVMe SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.1 (Plow)
5.14.0-162.6.1.el9_1.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version BIOS_BHS120.72.02.004 released Apr-2025
File System: xfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	344	426	1290	426	1290	<u>426</u>	<u>1290</u>							
502.gcc_r	344	445	1090	<u>445</u>	<u>1090</u>	447	1090							
505.mcf_r	344	<u>270</u>	<u>2060</u>	271	2050	270	2060							
520.omnetpp_r	344	574	786	<u>574</u>	<u>786</u>	574	786							
523.xalancbmk_r	344	<u>168</u>	<u>2160</u>	168	2160	168	2160							
525.x264_r	344	161	3750	<u>161</u>	<u>3750</u>	160	3760							
531.deepsjeng_r	344	<u>284</u>	<u>1390</u>	285	1380	284	1390							
541.leela_r	344	473	1200	475	1200	<u>474</u>	<u>1200</u>							
548.exchange2_r	344	<u>238</u>	<u>3790</u>	238	3790	238	3790							
557.xz_r	344	519	715	520	715	<u>519</u>	<u>715</u>							

SPECrate®2017_int_base = 1560

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/SPEC/lib/intel64:/home/SPEC/lib/ia32:/home/SPEC/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Platform Notes

BIOS Configuration:
DCU Streamer Prefetcher = Disabled

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Platform Notes (Continued)

SNC = Enabled

Power Performance Tuning = BIOS controls EPB

ENERGY_PERF_BIAS_CFG mode = Hyper Performance

Package C State = C0/C1 state

Sysinfo program /home/SPEC/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on tournesol Thu Apr 10 23:14:48 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-12.el9_1)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux tournesol 5.14.0-162.6.1.el9_1.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Sep 30 07:36:03 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
23:14:48 up 5:21, 1 user, load average: 0.04, 0.01, 0.00
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      pts/0    23:10   45.00s  1.09s  0.06s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Platform Notes (Continued)

scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 4124124
max locked memory	(kbytes, -l) 64
max memory size	(kbytes, -m) unlimited
open files	(-n) 16384
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 4124124
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
bash run_one_rate.sh 3 intrate
runcpu --define default-platform-flags --copies 344 --configfile mesca6_2S --define smt-on --define numactl
--define cores=172 --define invoke_with_interleave --define drop_caches --iterations=3 --reportable
--size=ref --tune base -o all intrate
runcpu --define default-platform-flags --copies 344 --configfile mesca6_2S --define smt-on --define numactl
--define cores=172 --define invoke_with_interleave --define drop_caches --iterations 3 --reportable --size
ref --tune base --output_format all --nopower --runmode rate --tune base --size refrate intrate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.084/temlogs/preenv.intrate.084.0.log --lognum 084.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/SPEC
-----
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6787P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 86
siblings       : 172
2 physical ids (chips)
344 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
-----
```

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Platform Notes (Continued)

Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 344
On-line CPU(s) list: 0-343
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6787P
BIOS Model name: Intel(R) Xeon(R) 6787P
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 86
Socket(s): 2
Stepping: 1
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpv vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization: VT-x
L1d cache: 8.1 MiB (172 instances)
L1i cache: 10.8 MiB (172 instances)
L2 cache: 344 MiB (172 instances)
L3 cache: 672 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-42,172-214
NUMA node1 CPU(s): 43-85,215-257
NUMA node2 CPU(s): 86-128,258-300
NUMA node3 CPU(s): 129-171,301-343
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
------	----------	----------	------	------	-------	------	----------	----------------

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Platform Notes (Continued)

L1d	48K	8.1M	12 Data	1	64	1	64
L1i	64K	10.8M	16 Instruction	1	64	1	64
L2	2M	344M	16 Unified	2	2048	1	64
L3	336M	672M	16 Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 257075 MB
node 0 free: 254756 MB
node 1 cpus: 43-85,215-257
node 1 size: 258029 MB
node 1 free: 257173 MB
node 2 cpus: 86-128,258-300
node 2 size: 258029 MB
node 2 free: 257229 MB
node 3 cpus: 129-171,301-343
node 3 size: 257959 MB
node 3 free: 257151 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1055840384 kB

10. who -r

run-level 5 Apr 10 17:55

11. Systemd service manager version: systemd 250 (250-12.el9_1)

Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dnf-makecache.service	loaded	failed	failed	dnf makecache

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewallld gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnsmasq iprump iprinit iprupdate iscsid iscsiui kpatch kvm_stat

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Platform Notes (Continued)

indirect
ledmon man-db-restart-cache-update ndctl-monitor netavark-dhcp-proxy
netavark-firewalld-reload nftables nvme-autoconnect ostree-readonly-sysroot-migration
ostree-state-overlay@ podman podman-auto-update podman-clean-transient podman-kube@
podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild
speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
systemd-sysext wpa_supplicant
serial-getty@ spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-162.6.1.el9_1.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
udev.children-max=64
console=tty0
console=ttyS0
tsc=nowatchdog

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvise [madvise] never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.1 (Plow)
redhat-release Red Hat Enterprise Linux release 9.1 (Plow)
system-release Red Hat Enterprise Linux release 9.1 (Plow)

21. Disk information
SPEC is set to: /home/SPEC
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.7T 872G 841G 51% /home

22. /sys/devices/virtual/dmi/id
Vendor: BULL
Product: BullSequana SH series
Product Family: -
Serial: XAN-S60-00045

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0EB2-CCPWC 64 GB 2 rank 6400

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: BULL
BIOS Version: BIOS_BHS120.72.02.004-D
BIOS Date: 04/04/2025
BIOS Revision: 48.72



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Bull SAS

SPECrate®2017_int_base = 1560

BullSequana SH21 (Intel Xeon 6787P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 20

Test Sponsor: Bull SAS

Tested by: Bull SAS

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Mar-2024

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/BullSequanaSH-Flags-V1.5.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/BullSequanaSH-Flags-V1.5.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-10 17:14:48-0400.

Report generated on 2025-07-01 19:08:27 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.