



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

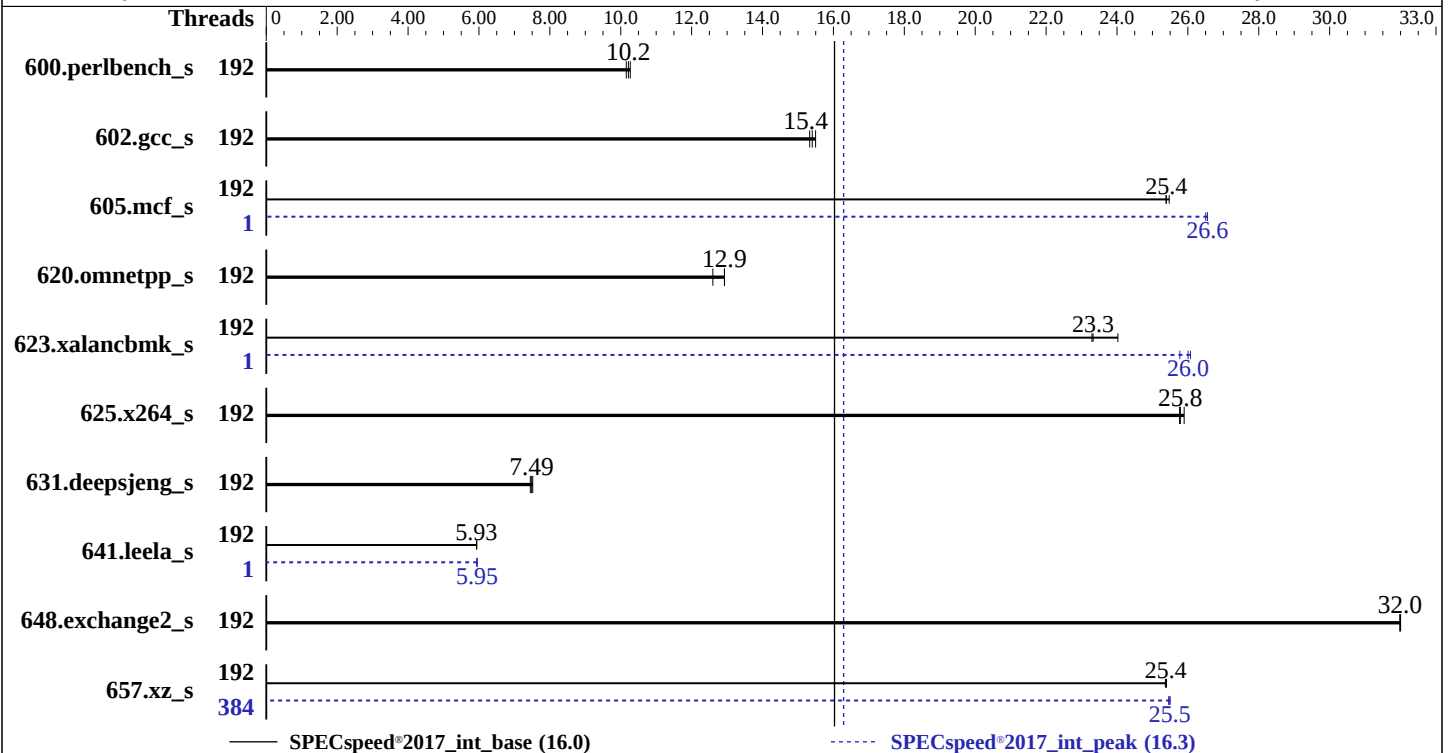

Hardware

CPU Name: AMD EPYC 9965
Max MHz: 3700
Nominal: 2250
Enabled: 192 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 16 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R,
running at 5200)
Storage: 1 x 2.9 TB NVMe SSD
Other: CPU Cooling: CLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v1.10 05/27/2025 released
May-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at
the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	173	10.3	175	10.2	<u>174</u>	<u>10.2</u>	192	173	10.3	175	10.2	<u>174</u>	<u>10.2</u>
602.gcc_s	192	260	15.3	257	15.5	<u>259</u>	<u>15.4</u>	192	260	15.3	257	15.5	<u>259</u>	<u>15.4</u>
605.mcf_s	192	185	25.5	186	25.4	<u>186</u>	<u>25.4</u>	1	<u>178</u>	<u>26.6</u>	178	26.5	178	26.6
620.omnetpp_s	192	126	12.9	<u>126</u>	<u>12.9</u>	129	12.6	192	126	12.9	<u>126</u>	<u>12.9</u>	129	12.6
623.xalancbmk_s	192	59.0	24.0	60.8	23.3	<u>60.7</u>	<u>23.3</u>	1	<u>54.5</u>	<u>26.0</u>	54.3	26.1	55.0	25.8
625.x264_s	192	68.5	25.8	68.1	25.9	<u>68.4</u>	<u>25.8</u>	192	68.5	25.8	68.1	25.9	<u>68.4</u>	<u>25.8</u>
631.deepsjeng_s	192	<u>191</u>	<u>7.49</u>	191	7.52	192	7.45	192	<u>191</u>	<u>7.49</u>	191	7.52	192	7.45
641.leela_s	192	288	5.93	287	5.94	<u>287</u>	<u>5.93</u>	1	287	5.94	287	5.95	<u>287</u>	<u>5.95</u>
648.exchange2_s	192	91.9	32.0	<u>91.9</u>	<u>32.0</u>	91.9	32.0	192	91.9	32.0	<u>91.9</u>	<u>32.0</u>	91.9	32.0
657.xz_s	192	243	25.4	<u>244</u>	<u>25.4</u>	244	25.4	384	242	25.5	243	25.5	<u>243</u>	<u>25.5</u>

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-383"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "384"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-383"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Two memory domains per socket

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.5

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Jun 10 16:06:28 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
```

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
16:06:28 up 1 min, 3 users, load average: 0.28, 0.11, 0.04
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093818
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093818
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/intspeed.sh
python3 ./run_intspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.intspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9965 192-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb101047
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 192
siblings        : 384
1 physical ids (chips)
384 processors (hardware threads)
physical id 0:  core ids 0-191
physical id 0:  apicids 0-383
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            384
On-line CPU(s) list: 0-383
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9965 192-Core Processor
BIOS Model name:   AMD EPYC 9965 192-Core Processor
BIOS CPU family:   107
CPU family:        26
Model:             17
Thread(s) per core: 2
Core(s) per socket: 192
Socket(s):         1
Stepping:          0
Frequency boost:    enabled
CPU(s) scaling MHz: 101%
CPU max MHz:       2250.0000
CPU min MHz:       1500.0000
BogoMIPS:          4493.33
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  CPU @ 2.2GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap

AMD-V

9 MiB (192 instances)

6 MiB (192 instances)

192 MiB (192 instances)

384 MiB (12 instances)

12

0-15, 192-207

16-31, 208-223

32-47, 224-239

48-63, 240-255

64-79, 256-271

80-95, 272-287

96-111, 288-303

112-127, 304-319

128-143, 320-335

144-159, 336-351

160-175, 352-367

176-191, 368-383

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Mitigation; Speculative Store Bypass disabled via prctl

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected

Not affected

Not affected

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

NUMA node8 CPU(s):

NUMA node9 CPU(s):

NUMA node10 CPU(s):

NUMA node11 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 12 nodes (0-11)
node 0 cpus: 0-15,192-207
node 0 size: 64124 MB
node 0 free: 63789 MB
node 1 cpus: 16-31,208-223
node 1 size: 64503 MB
node 1 free: 64269 MB
node 2 cpus: 32-47,224-239
node 2 size: 64503 MB
node 2 free: 63648 MB
node 3 cpus: 48-63,240-255
node 3 size: 64503 MB
node 3 free: 64302 MB
node 4 cpus: 64-79,256-271
node 4 size: 64465 MB
node 4 free: 64234 MB
node 5 cpus: 80-95,272-287
node 5 size: 64503 MB
node 5 free: 64256 MB
node 6 cpus: 96-111,288-303
node 6 size: 64503 MB
node 6 free: 64228 MB
node 7 cpus: 112-127,304-319
node 7 size: 64503 MB
node 7 free: 64246 MB
node 8 cpus: 128-143,320-335
node 8 size: 64358 MB
node 8 free: 64112 MB
node 9 cpus: 144-159,336-351
node 9 size: 64503 MB
node 9 free: 64251 MB
node 10 cpus: 160-175,352-367
node 10 size: 64503 MB
node 10 free: 64183 MB
node 11 cpus: 176-191,368-383
node 11 size: 64503 MB
node 11 free: 64050 MB
```

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11
0:	10	11	11	11	11	11	12	12	12	12	12	12
1:	11	10	11	11	11	11	12	12	12	12	12	12
2:	11	11	10	11	11	11	12	12	12	12	12	12
3:	11	11	11	10	11	11	12	12	12	12	12	12
4:	11	11	11	11	10	11	12	12	12	12	12	12
5:	11	11	11	11	11	10	12	12	12	12	12	12
6:	12	12	12	12	12	12	10	11	11	11	11	11
7:	12	12	12	12	12	12	11	10	11	11	11	11
8:	12	12	12	12	12	12	11	11	10	11	11	11
9:	12	12	12	12	12	12	11	11	11	10	11	11
10:	12	12	12	12	12	12	11	11	11	11	10	11
11:	12	12	12	12	12	12	11	11	11	11	11	10

9. /proc/meminfo

MemTotal: 792042616 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

10. who -r
run-level 3 Jun 10 16:05

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections
nvme-fc-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load rpmconfigcheck serial-getty@
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysex
systemd-time-wait-sync systemd-timesyncd
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=77a66830-7e7e-4762-8a5b-fc60e928c5ce
splash=silent
resume=/dev/disk/by-uuid/93ad4cd8-7b73-407d-9be5-12bbb0490060
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 361:
current policy: frequency should be within 1.50 GHz and 2.25 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme2n1p3 xfs 2.2T 67G 2.1T 4% /home

20. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: HPE ProLiant Compute DL325 Gen12
Product Family: ProLiant
Serial: SANJACSCM

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
4x Micron MTC40F2046S1RC64BD2 MWWF 64 GB 2 rank 6400, configured at 5200
8x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 1.10
BIOS Date: 05/27/2025
BIOS Revision: 1.10
Firmware Revision: 1.13



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====
```

```
=====
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====
```

```
=====
Fortran | 648.exchange2_s(base, peak)
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-DSPEC_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

657.xz_s (continued):

```
-Wl, -allow-multiple-definition
-Wl, -mllvm -Wl, -extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlbm -lamdalloc -lflang
```

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14

```
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlbm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14

```
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlbm -lamdalloc -lflang
```

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.25 GHz, AMD EPYC 9965)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.3

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.6.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.6.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-10 06:36:28-0400.

Report generated on 2025-07-01 19:09:08 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.