



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

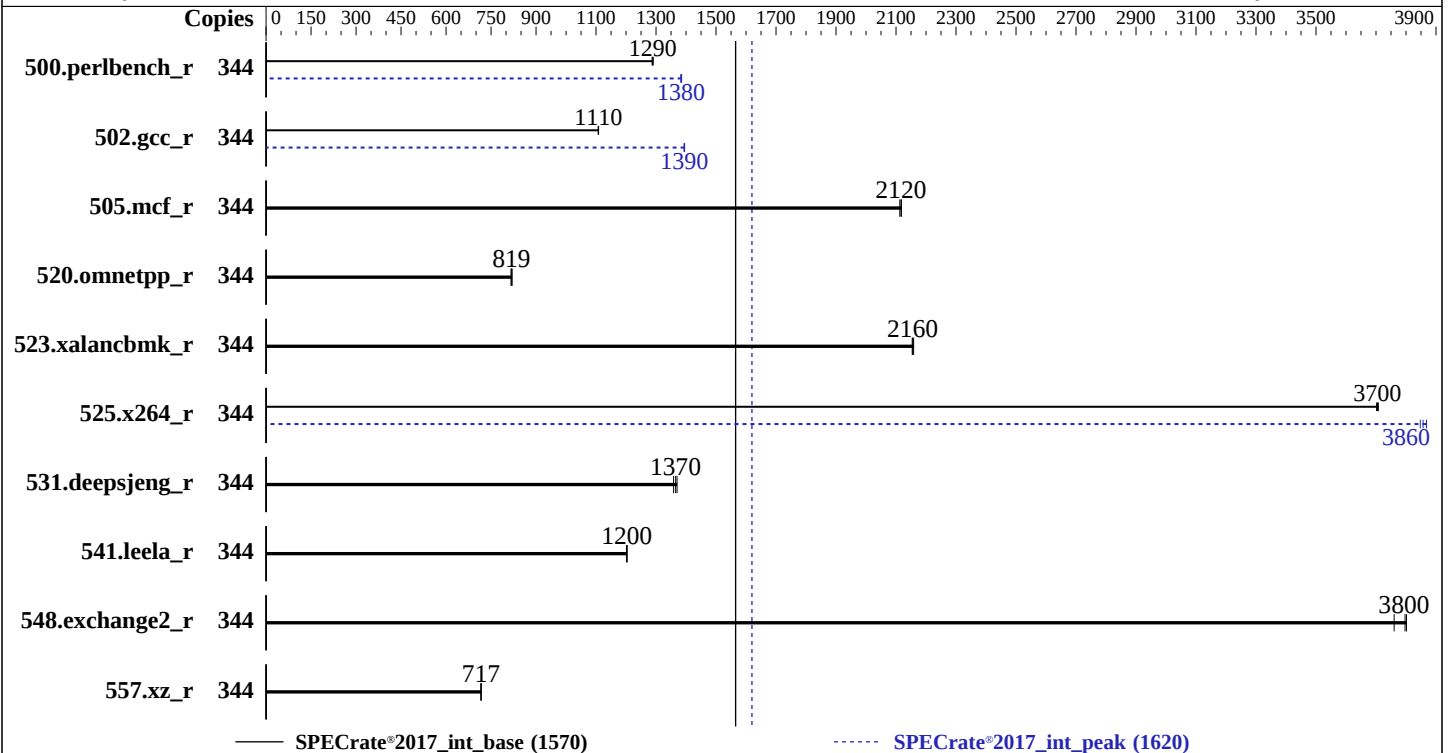

Hardware

CPU Name: Intel Xeon 6788P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 1, 2 Chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 3.2 TB NVMe SSD
Other: CPU Cooling: CLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	344	424	1290	<u>425</u>	<u>1290</u>	426	1290	344	396	1380	395	1390	<u>396</u>	<u>1380</u>
502.gcc_r	344	<u>440</u>	<u>1110</u>	440	1110	439	1110	344	349	1400	350	1390	<u>349</u>	<u>1390</u>
505.mcf_r	344	262	2120	<u>263</u>	<u>2120</u>	263	2110	344	262	2120	<u>263</u>	<u>2120</u>	263	2110
520.omnetpp_r	344	<u>551</u>	<u>819</u>	553	816	550	820	344	<u>551</u>	<u>819</u>	553	816	550	820
523.xalancbmk_r	344	<u>169</u>	<u>2160</u>	169	2150	168	2160	344	<u>169</u>	<u>2160</u>	169	2150	168	2160
525.x264_r	344	163	3700	162	3710	<u>163</u>	<u>3700</u>	344	157	3850	156	3870	<u>156</u>	<u>3860</u>
531.deepsjeng_r	344	290	1360	288	1370	<u>289</u>	<u>1370</u>	344	290	1360	288	1370	<u>289</u>	<u>1370</u>
541.leela_r	344	473	1200	474	1200	<u>474</u>	<u>1200</u>	344	473	1200	474	1200	<u>474</u>	<u>1200</u>
548.exchange2_r	344	<u>237</u>	<u>3800</u>	240	3760	237	3800	344	<u>237</u>	<u>3800</u>	240	3760	237	3800
557.xz_r	344	519	716	<u>518</u>	<u>717</u>	518	717	344	519	716	<u>518</u>	<u>717</u>	518	717

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was stopped using "systemctl stop tuned"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Throughput Compute

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

XPT Prefetch set to Disabled

Intel UPI Prefetch set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Mon May 5 02:13:23 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
-----
2. w
  02:13:23 up 3 min,  4 users,  load average: 0.18, 0.17, 0.08
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
-----
3. Username
  From environment variable $USER:  root

-----
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority     (-e) 0
  file size               (blocks, -f) unlimited
  pending signals         (-i) 2062081
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files              (-n) 1024
  pipe size               (512 bytes, -p) 8
  POSIX message queues    (bytes, -q) 819200
  real-time priority      (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time                (seconds, -t) unlimited
  max user processes      (-u) 2062081
  virtual memory          (kbytes, -v) unlimited
  file locks              (-x) unlimited

-----
5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize=41
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd: root [priv]
  sshd: root@notty
  bash -c cd $SPEC/ && $SPEC/intrate_sapphire.sh
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 -c
    ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 --configfile
    ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
    --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
  $SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
  model name      : Intel(R) Xeon(R) 6788P
  vendor_id      : GenuineIntel
  cpu family     : 6
  model          : 173
  stepping       : 1
  microcode      : 0x1000380
  bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
  cpu cores      : 86
  siblings       : 172
  2 physical ids (chips)
  344 processors (hardware threads)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      344
On-line CPU(s) list:         0-343
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6788P
BIOS Model name:             Intel(R) Xeon(R) 6788P   CPU @ 2.0GHZ
BIOS CPU family:             179
CPU family:                  6
Model:                       173
Thread(s) per core:         2
Core(s) per socket:         86
Socket(s):                   2
Stepping:                    1
BogoMIPS:                    4000.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                             rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                             clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                             vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                             rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   8.1 MiB (172 instances)
L1i cache:                   10.8 MiB (172 instances)
L2 cache:                    344 MiB (172 instances)
L3 cache:                    672 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-42,172-214
NUMA node1 CPU(s):           43-85,215-257
NUMA node2 CPU(s):           86-128,258-300
NUMA node3 CPU(s):           129-171,301-343
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 128625 MB
node 0 free: 127107 MB
node 1 cpus: 43-85,215-257
node 1 size: 129001 MB
node 1 free: 127464 MB
node 2 cpus: 86-128,258-300
node 2 size: 129001 MB
node 2 free: 128324 MB
node 3 cpus: 129-171,301-343
node 3 size: 128922 MB
node 3 free: 127942 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 527924264 kB

10. who -r

run-level 5 May 5 02:11

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback
rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny wpa_supplicant
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmiev
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@
ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=6f38f8cb-6744-4bb2-980a-6e692ebdf8b4
splash=silent
resume=/dev/disk/by-uuid/3188516f-5c98-4497-afe7-d252ff459ba8
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 153:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: balanced

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

vm.zone_reclaim_mode

0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme2n1p3 xfs 2.0T 76G 1.9T 4% /home

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: HPE ProLiant Compute DL360 Gen12
Product Family: ProLiant
Serial: D249RP0053

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 02/14/2025
BIOS Revision: 1.20
Firmware Revision: 1.11



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Compiler Version Notes

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL360 Gen12

(2.00 Ghz, Intel Xeon 6788P)

SPECrate®2017_int_base = 1570

SPECrate®2017_int_peak = 1620

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-04 16:43:22-0400.

Report generated on 2025-07-14 14:33:46 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-14.