



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488


Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

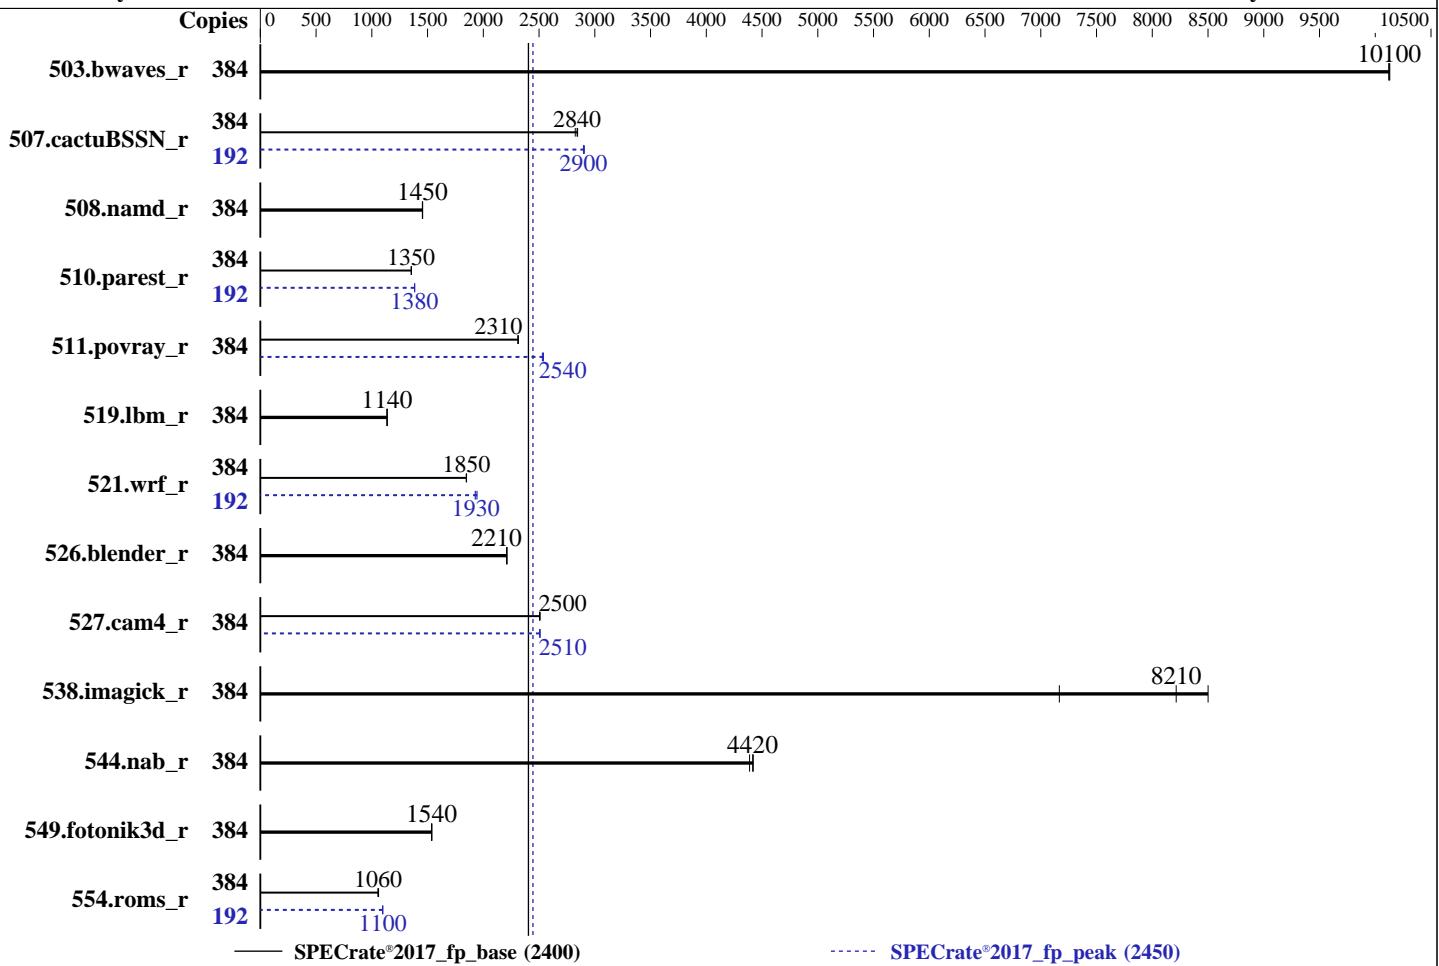

## Hardware

CPU Name: Intel Xeon 6972P  
Max MHz: 3900  
Nominal: 2400  
Enabled: 192 cores, 2 chips, 2 threads/core  
Orderable: 2 chips  
Cache L1: 64 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 480 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-88/44B-M)  
Storage: 1 x 7.68 TB NVMe SSD  
Other: CPU Cooling: Air

OS:

SUSE Linux Enterprise Server 15 SP6  
6.4.0-150600.21-default

Compiler:

C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler  
for Linux;

Parallel:

No

Firmware:

Version 01.01.06.05 Released Feb-2025

File System:

btrfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS set to prefer performance at the cost  
of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	<u><b>380</b></u>	<u><b>10100</b></u>	380	10100	380	10100	384	<u><b>380</b></u>	<u><b>10100</b></u>	380	10100	380	10100
507.cactuBSSN_r	384	171	2850	172	2820	<u><b>171</b></u>	<u><b>2840</b></u>	192	83.6	2910	<u><b>83.8</b></u>	<u><b>2900</b></u>	83.9	2900
508.namd_r	384	251	1450	251	1460	<u><b>251</b></u>	<u><b>1450</b></u>	384	251	1450	251	1460	<u><b>251</b></u>	<u><b>1450</b></u>
510.parest_r	384	742	1350	741	1350	<u><b>742</b></u>	<u><b>1350</b></u>	192	363	1380	363	1380	<u><b>363</b></u>	<u><b>1380</b></u>
511.povray_r	384	<u><b>388</b></u>	<u><b>2310</b></u>	388	2310	388	2310	384	<u><b>354</b></u>	<u><b>2540</b></u>	353	2540	354	2530
519.lbm_r	384	<u><b>356</b></u>	<u><b>1140</b></u>	356	1140	356	1140	384	<u><b>356</b></u>	<u><b>1140</b></u>	356	1140	356	1140
521.wrf_r	384	<u><b>465</b></u>	<u><b>1850</b></u>	465	1850	466	1850	192	223	1930	<u><b>222</b></u>	<u><b>1930</b></u>	221	1940
526.blender_r	384	<u><b>265</b></u>	<u><b>2210</b></u>	264	2210	265	2210	384	<u><b>265</b></u>	<u><b>2210</b></u>	264	2210	265	2210
527.cam4_r	384	268	2510	<u><b>268</b></u>	<u><b>2500</b></u>	268	2500	384	<u><b>268</b></u>	<u><b>2510</b></u>	268	2510	268	2510
538.imagick_r	384	112	8500	<u><b>116</b></u>	<u><b>8210</b></u>	133	7170	384	112	8500	<u><b>116</b></u>	<u><b>8210</b></u>	133	7170
544.nab_r	384	146	4420	<u><b>146</b></u>	<u><b>4420</b></u>	147	4390	384	146	4420	<u><b>146</b></u>	<u><b>4420</b></u>	147	4390
549.fotonik3d_r	384	974	1540	973	1540	<u><b>974</b></u>	<u><b>1540</b></u>	384	974	1540	973	1540	<u><b>974</b></u>	<u><b>1540</b></u>
554.roms_r	384	575	1060	578	1060	<u><b>577</b></u>	<u><b>1060</b></u>	192	<u><b>278</b></u>	<u><b>1100</b></u>	278	1100	278	1100

SPECrate®2017\_fp\_base = 2400

SPECrate®2017\_fp\_peak = 2450

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-191

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/root/speccpu/lib/intel64:/root/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enabled

```
Sysinfo program /root/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Apr 13 11:20:01 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
11:20:01 up 23:52, 1 user, load average: 28.50, 175.93, 280.18  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty2 - Sat11 23:48m 1.23s 0.03s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

core file size	(blocks, -c) unlimited
data seg size	(kbytes, -d) unlimited
scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 3091830
max locked memory	(kbytes, -l) 8192
max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 3091830
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=192 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=192 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.004/templogs/preenv.fprate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/speccpu
```

-----  
6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) 6972P
vendor_id	: GenuineIntel
cpu family	: 6
model	: 173
stepping	: 1
microcode	: 0x1000380
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores	: 96
siblings	: 192
2 physical ids (chips)	
384 processors (hardware threads)	
physical id 0: core ids 0-31,64-95,128-159	
physical id 1: core ids 0-31,64-95,128-159	
physical id 0: apicids 0-63,128-191,256-319	
physical id 1: apicids 512-575,640-703,768-831	

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Platform Notes (Continued)

7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 384
On-line CPU(s) list: 0-383
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6972P
BIOS Model name: Intel(R) Xeon(R) 6972P CPU @ 2.4GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 96
Socket(s): 2
Stepping: 1
BogoMIPS: 4800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfimperf tsc_known_freq pnin
pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_13 cat_12 cdp_13 intel_ppin cdp_12 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsqbase
tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
sha_ni avx512bw avx512vl xsaveopt xsaved xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
vnmi avx512vbmi umip pkru ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_llc arch_capabilities
Virtualization:
L1d cache: 9 MiB (192 instances)
L1i cache: 12 MiB (192 instances)
L2 cache: 384 MiB (192 instances)
L3 cache: 960 MiB (2 instances)
NUMA node(s):
NUMA node0 CPU(s): 0-31,192-223
NUMA node1 CPU(s): 32-63,224-255
NUMA node2 CPU(s): 64-95,256-287
NUMA node3 CPU(s): 96-127,288-319
NUMA node4 CPU(s): 128-159,320-351
NUMA node5 CPU(s): 160-191,352-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECCrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECCrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Platform Notes (Continued)

```
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
Vulnerability Srbds: PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Tsx async abort: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	64K	12M	16	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	480M	960M	16	Unified	3	491520	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 6 nodes (0-5)
node 0 cpus: 0-31,192-223
node 0 size: 128432 MB
node 0 free: 126725 MB
node 1 cpus: 32-63,224-255
node 1 size: 129007 MB
node 1 free: 126887 MB
node 2 cpus: 64-95,256-287
node 2 size: 129007 MB
node 2 free: 127865 MB
node 3 cpus: 96-127,288-319
node 3 size: 128968 MB
node 3 free: 127934 MB
node 4 cpus: 128-159,320-351
node 4 size: 129007 MB
node 4 free: 127933 MB
node 5 cpus: 160-191,352-383
node 5 size: 128564 MB
node 5 free: 127443 MB
node distances:
node 0 1 2 3 4 5
0: 10 12 12 21 21 21
1: 12 10 12 21 21 21
2: 12 12 10 21 21 21
3: 21 21 21 10 12 12
4: 21 21 21 12 10 12
5: 21 21 21 12 12 10
```

-----  
9. /proc/meminfo

```
MemTotal: 791538524 kB
```

-----  
10. who -r

```
run-level 3 Apr 12 11:30 last=5
```

-----  
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
graphical degraded
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2288H V8 (Intel Xeon 6972P)

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**SPECrate®2017\_fp\_base = 2400**

**SPECrate®2017\_fp\_peak = 2450**

**Test Date:** Apr-2025

**Hardware Availability:** Apr-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```
-----  
12. Failed units, from systemctl list-units --state=failed  
    UNIT           LOAD  ACTIVE SUB   DESCRIPTION  
* sep5.service    loaded failed systemd script to load sep5 driver at boot time  
* udisks2.service loaded failed Disk Manager  
  
-----  
13. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache audited bluetooth cron  
               display-manager getty@ issue-generator kbdsettings kdump kdump-early kdump-notify klog  
               lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback  
               rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6  
               wickedd-nanny  
enabled-runtime  systemd-remount-fs  
disabled       accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl  
               ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables  
               exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievfd irqbalance  
               issue-add-ssh-keys kexec-load lummask man-db-create multipathd nfs nfs-blkmap nmb  
               ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@  
               smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures  
               systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
               systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@  
indirect        systemd-userdbd wickedd  
  
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=6e3dc6a0-eb5c-4adf-9eb8-8aef9c14cf2c  
nohz_full=1-191  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=365M,high  
crashkernel=72M,low  
  
-----  
15. cpupower frequency-info  
analyzing CPU 264:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes  
  
-----  
16. sysctl  
kernel.numa_balancing      1  
kernel.randomize_va_space  2  
vm.compaction_proactiveness 20  
vm.dirty_background_bytes   0  
vm.dirty_background_ratio   10  
vm.dirty_bytes              0  
vm.dirty_expire_centisecs  3000  
vm.dirty_ratio              20  
vm.dirty_writeback_centisecs 500  
vm.dirtytime_expire_seconds 43200  
vm.extfrag_threshold       500  
vm.min_unmapped_ratio      1
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Platform Notes (Continued)

```
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode      0

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled  always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6

-----
20. Disk information
    SPEC is set to: /root/speccpu
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p3  btrfs  1.5T  333G  1.2T  23% /root

-----
21. /sys/devices/virtual/dmi/id
    Product:        2288H V8
    Product Family: Birch Stream

-----
22. dmidecode
    Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        24x Micron MTC20F2085S1HC88XD1 WCCCC 32 GB 2 rank 8800

-----
23. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      INSYDE Corp.
    BIOS Version:     01.01.06.05
    BIOS Date:        02/26/2025
    BIOS Revision:    6.5
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 507.cactubssn_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

=====
Fortran      | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

=====
Fortran, C   | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECCrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECCrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -futto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-futto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 2400

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Date: Apr-2025

Test Sponsor: xFusion

Hardware Availability: Apr-2025

Tested by: xFusion

Software Availability: Jun-2024

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

FusionServer 2288H V8 (Intel Xeon 6972P)

SPECrate®2017\_fp\_base = 2400

SPECrate®2017\_fp\_peak = 2450

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-12 23:20:00-0400.

Report generated on 2025-07-16 11:07:26 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-15.