



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

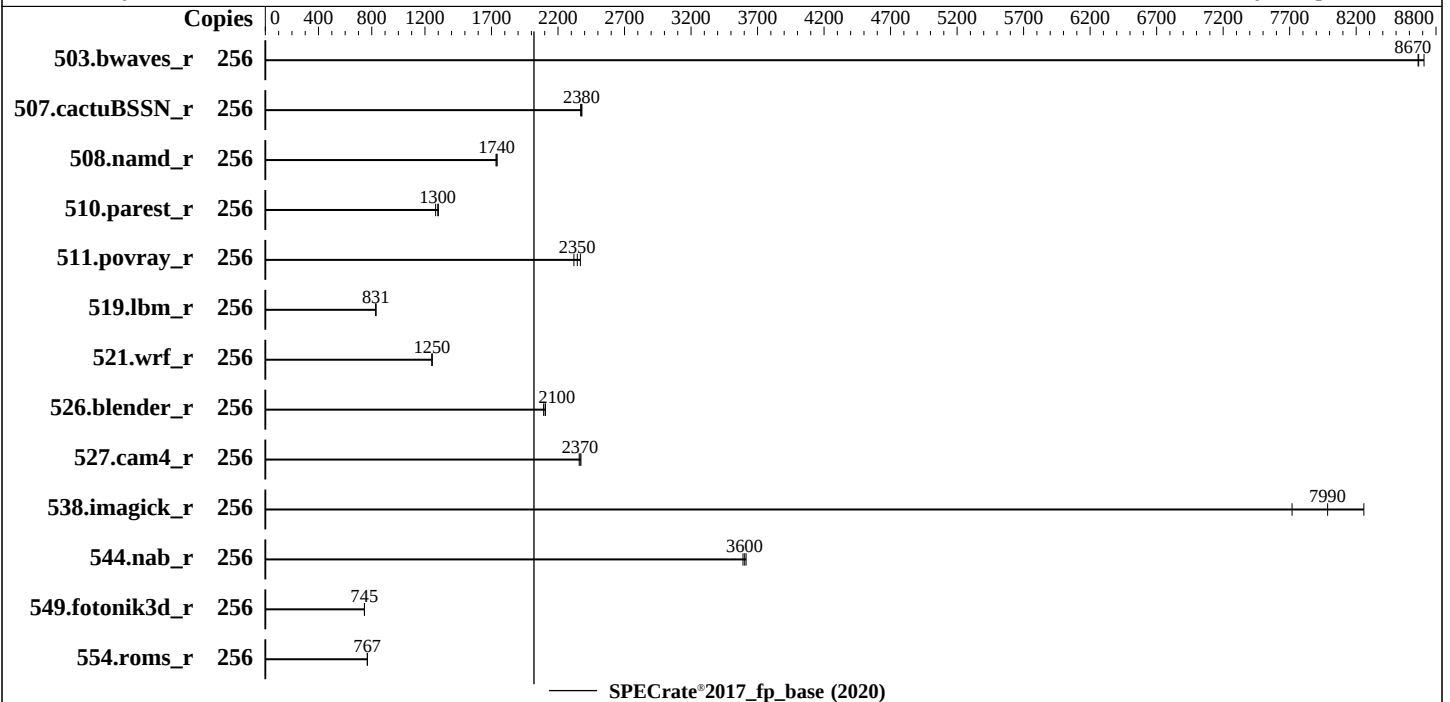

Hardware

CPU Name: AMD EPYC 9745
Max MHz: 3700
Nominal: 2400
Enabled: 256 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 16 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 222 GB NVME SSD
Other: CPU Cooling: DLC

Software

OS: Red Hat Enterprise Linux release 9.4 (Plow)
kernel version
5.14.0-427.13.1.el9.x86_64
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version CA2K_5.35_v5.40 released Mar-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	296	8670	296	8670	295	8710							
507.cactuBSSN_r	256	136	2380	136	2380	137	2370							
508.namd_r	256	140	1740	140	1740	140	1730							
510.parest_r	256	523	1280	515	1300	517	1300							
511.povray_r	256	252	2370	255	2350	258	2320							
519.lbm_r	256	325	831	325	830	325	831							
521.wrf_r	256	458	1250	458	1250	458	1250							
526.blender_r	256	186	2090	185	2110	185	2100							
527.cam4_r	256	190	2360	189	2370	189	2370							
538.imagick_r	256	82.5	7720	77.1	8260	79.7	7990							
544.nab_r	256	120	3590	119	3610	120	3600							
549.fotonik3d_r	256	1339	745	1338	746	1339	745							
554.roms_r	256	530	767	530	767	530	768							

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/tmp/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib:/tmp/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib
/lib32:/home/users/jsouthern/lib:/opt/cray/pe/papi/7.2.0.1/lib64"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Determinism Control set to Manual

Determinism Enable set to Power

NUMA nodes per socket set to NPS4

Sysinfo program /tmp/cpu2017-1.1.9/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on cn51 Tue Jul 1 08:13:14 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode warning
23. BIOS
```

```
1. uname -a
Linux cn51 5.14.0-427.13.1.el9.x86_64 #1 SMP PREEMPT_DYNAMIC Mon Dec 2 16:59:18 CST 2024 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
08:13:14 up 5 days, 22:31, 0 users, load average: 200.42, 240.27, 246.25
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
```

```
3. Username
From environment variable $USER: jsouthern
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority          (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 3091720
max locked memory            (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                   (-n) 16384
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 3091720
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

```
5. sysinfo process ancestry
/sbin/init
/opt/pbs/sbin/pbs_mom
-bash
/bin/bash /var/spool/pbs/mom_priv/jobs/11559[36].janus2-login.SC
python3 ./run_amd_rate_aocc500_znver5_A1.py -b specrate -s refrate -i 3 -thp always -rc 256 --reportable
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /tmp/cpu2017-1.1.9
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
6. /proc/cpuinfo
model name      : AMD EPYC 9745 128-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb101047
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 128
siblings        : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0:  core ids 0-127
physical id 1:  core ids 0-127
physical id 0:  apicids 0-255
physical id 1:  apicids 256-511
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 512
On-line CPU(s) list:    0-511
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9745 128-Core Processor
CPU family:             26
Model:                  17
Thread(s) per core:     2
Core(s) per socket:     128
Socket(s):              2
Stepping:               0
Frequency boost:        enabled
CPU(s) scaling MHz:     65%
CPU max MHz:            3707.8120
CPU min MHz:            1500.0000
BogoMIPS:               4792.83
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                        aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
                        x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
                        extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
                        wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
                        cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                        ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
                        cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                        decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
                        v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Platform Notes (Continued)

Virtualization: bus_lock_detect movdiri movdir64b overflow_recov succor smca frsm
avx512_vp2intersect flush_l1d debug_swap
AMD-V
L1d cache: 12 MiB (256 instances)
L1i cache: 8 MiB (256 instances)
L2 cache: 256 MiB (256 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-31,256-287
NUMA node1 CPU(s): 32-63,288-319
NUMA node2 CPU(s): 64-95,320-351
NUMA node3 CPU(s): 96-127,352-383
NUMA node4 CPU(s): 128-159,384-415
NUMA node5 CPU(s): 160-191,416-447
NUMA node6 CPU(s): 192-223,448-479
NUMA node7 CPU(s): 224-255,480-511
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP
always-on, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-31,256-287
node 0 size: 95860 MB
node 0 free: 86519 MB
node 1 cpus: 32-63,288-319
node 1 size: 96752 MB
node 1 free: 88146 MB
node 2 cpus: 64-95,320-351
node 2 size: 96752 MB
node 2 free: 89101 MB
node 3 cpus: 96-127,352-383
node 3 size: 96752 MB
node 3 free: 88995 MB
node 4 cpus: 128-159,384-415
node 4 size: 96752 MB
node 4 free: 84563 MB
node 5 cpus: 160-191,416-447
node 5 size: 96710 MB
node 5 free: 88979 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
node 6 cpus: 192-223,448-479
node 6 size: 96752 MB
node 6 free: 89096 MB
node 7 cpus: 224-255,480-511
node 7 size: 96647 MB
node 7 free: 88315 MB
node distances:
node  0  1  2  3  4  5  6  7
0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

```
-----
9. /proc/meminfo
MemTotal:      791529692 kB
```

```
-----
10. who -r
run-level 3 Jun 25 09:46
```

```
-----
11. Systemd service manager version: systemd 252 (252-32.el9_4)
Default Target Status
multi-user        degraded
```

```
-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online
* rc-local.service                  loaded failed failed /etc/rc.d/rc.local Compatibility
```

```
-----
13. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online after-local array
atomd auditd chronyd cm-configuration cm-slingshot-ama cm-slingshot-bonding
cm-slingshot-ifroute cm_cpe cpuset_cpunodemap cpuset_memory_spread crond dbus-broker
getty@ irqbalance kdump lldpad low-memory-monitor mdmonitor microcode nis-domainname
oddjobd openibd palsd pbs pe postfix procset rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
tempohb-client upower
enabled-runtime rc-local rpc-statd systemd-fsck-root systemd-remount-fs
disabled      arp-ethers canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
chrony-wait chronyd-restricted clmgr-health-boot cm-slingshot-ama@ collectl console-getty
cpupower debug-shell dnf-system-upgrade filebeat firewalld gssproxy hpcmd-lsms-lead ibacm
kvm_stat lnet man-db-restart-cache-update munge named nfs-blkmap nfs-server nftables
opensmd opensmd@ pbs@ rdisc rpmdm-rebuild selinux-check-proper-disable sshd-keygen@
sysstat systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect      serial-getty@ sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
systemd-sysupdate systemd-sysupdate-reboot
masked        plymouth-start
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
vmlinuz-5.14.0-427.13.1.el9.x86_64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
initrd=initramfs-5.14.0-427.13.1.el9.x86_64.img
ROOTFS=disk
IMAGE_PENDING=1
IMAGE=rhel94-amd-turin-hpe-gbc-pe-25.3.3
SLOT=3
console=ttyS0,115200n8
NODETYPE=service
NODE_ID=service3101160003
HOSTNAME=cn51
SLOTCOUNT=4
MONITOR_CONSOLE=yes
ro
root=dhcp
selinux=0
biosdevname=0
numa_balancing=disable
net.naming-scheme=v239
systemd.unified_cgroup_hierarchy=0
TRANSPORT=rsync
IMAGESERVER=172.23.0.1
TTL=2
MCAST_RDV_ADDR=239.255.255.1
FLAMETHROWER_DIRECTORY_PORTBASE=9000
START_TIMEOUT=0
RECEIVE_TIMEOUT=15
crashkernel=410M
net.ifnames=1
MGMT_BONDING_TYPE=active-backup
RW_SPARSE_PERHOST_SIZE=500M
MAC=b4:7a:f1:b4:18:fc
```

15. cpupower frequency-info

analyzing CPU 451:

current policy: frequency should be within 2.40 GHz and 2.40 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: no

16. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Platform Notes (Continued)

vm.watermark_scale_factor 10
vm.zone_reclaim_mode 3

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.4 (Plow)
hpe-mpi-release HPE MPI 1.9.7, Build 731.0940.250418T1930.r.rhel94hpe
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
sgi-service-node-release Cluster Manager Service Node 1.12, Build
730.0940.240930T1930.r.rhel94hpe-240930T1930
system-release Red Hat Enterprise Linux release 9.4 (Plow)

20. Disk information
SPEC is set to: /tmp/cpu2017-1.1.9
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p33 xfs 222G 62G 161G 28% /

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: HPE Cray XD225v
Product Family: Cray

22. dmidecode warning
Cannot run dmidecode; consider saying (as root)
chmod +s /usr/sbin/dmidecode

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: CA2K_5.35_v5.40
BIOS Date: 03/20/2025

Compiler Version Notes

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base) 510.parest_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray_r(base) 526.blender_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11
(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Wl, -mllvm -Wl, -extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Wl, -mllvm -Wl, -extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Cray XD225v Gen11

(2.40 GHz, AMD EPYC 9745)

SPECrate®2017_fp_base = 2020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-XD225v-AMD-Turin-rev1.2.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-XD225v-AMD-Turin-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-01 09:13:13-0400.

Report generated on 2025-07-30 15:13:16 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-29.