SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

(Test Sponsor: Compal Inc.)

SR224-2A

AMD EPYC 9755

SPECspeed®2017_int_base = 17.8

SPECspeed®2017_int_peak = 18.1

CPU2017 License: 6857
Test Sponsor: Compal Inc.
Tested by: Compal Inc.

Test Date: Jul-2025
Hardware Availability: Jul-2025
Software Availability: Jul-2025

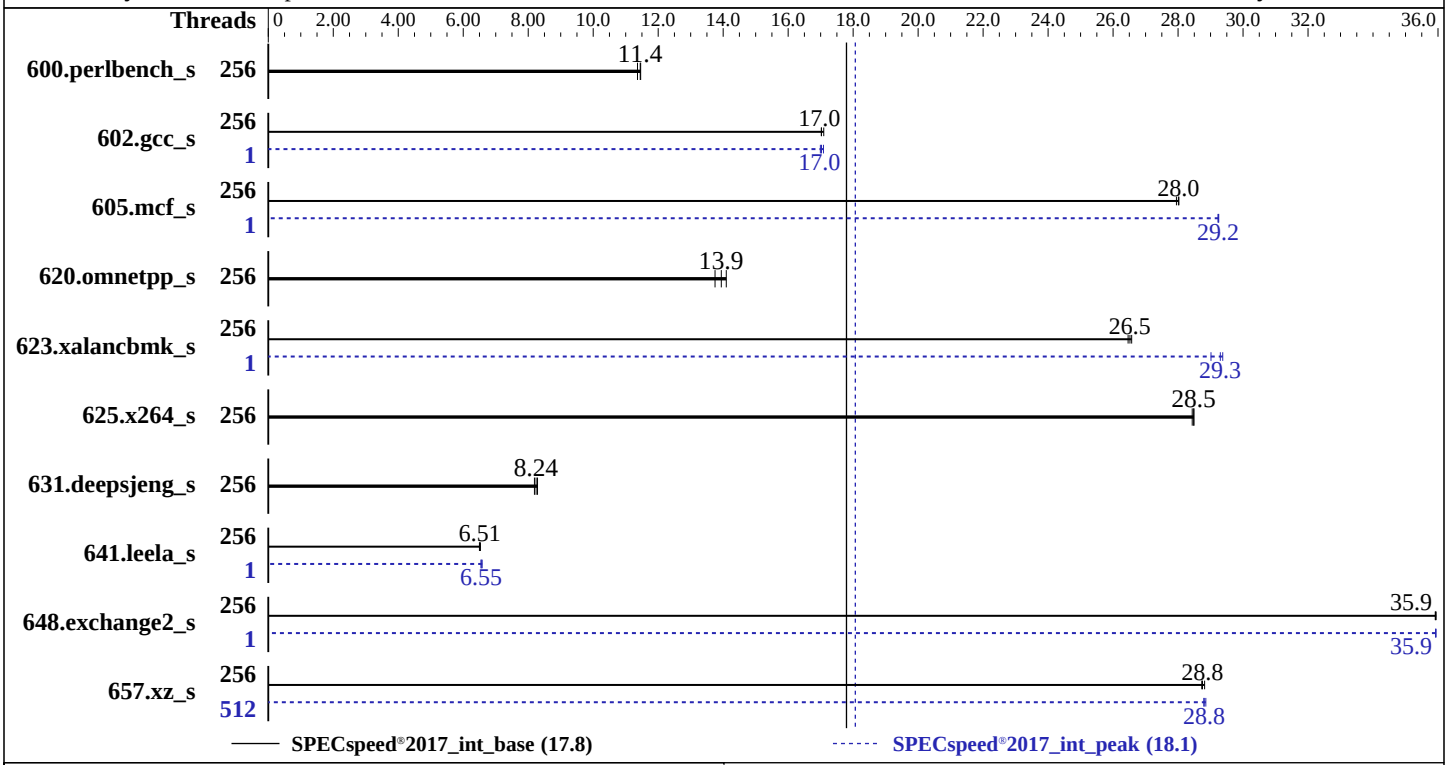

Hardware

CPU Name:	AMD EPYC 9755
Max MHz:	4100
Nominal:	2700
Enabled:	256 cores, 2 chips, 2 threads/core
Orderable:	2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	512 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 930 GB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 22.04.5 LTS kernel version 5.15.0-119-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	American Megatrends version 10.23.00 released May-2025
File System:	ext4
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

(Test Sponsor: Compal Inc.)

SR224-2A

AMD EPYC 9755

SPECspeed®2017_int_base = 17.8

SPECspeed®2017_int_peak = 18.1

CPU2017 License: 6857
Test Sponsor: Compal Inc.
Tested by: Compal Inc.

Test Date: Jul-2025
Hardware Availability: Jul-2025
Software Availability: Jul-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	155	11.5	156	11.4	**155**	**11.4**	256	155	11.5	156	11.4	**155**	**11.4**
602.gcc_s	256	**234**	**17.0**	233	17.1	234	17.0	1	**234**	**17.0**	233	17.1	234	17.0
605.mcf_s	256	169	27.9	**169**	**28.0**	168	28.0	1	161	29.2	**161**	**29.2**	161	29.3
620.omnetpp_s	256	119	13.7	116	14.1	**117**	**13.9**	256	119	13.7	116	14.1	**117**	**13.9**
623.xalancbmk_s	256	53.3	26.6	**53.4**	**26.5**	53.5	26.5	1	**48.4**	**29.3**	48.2	29.4	48.8	29.0
625.x264_s	256	62.0	28.4	61.9	28.5	**61.9**	**28.5**	256	62.0	28.4	61.9	28.5	**61.9**	**28.5**
631.deepsjeng_s	256	175	8.19	**174**	**8.24**	173	8.29	256	175	8.19	**174**	**8.24**	173	8.29
641.leela_s	256	261	6.53	263	6.50	**262**	**6.51**	1	259	6.58	**260**	**6.55**	260	6.55
648.exchange2_s	256	81.8	35.9	81.9	35.9	**81.8**	**35.9**	1	**81.8**	**35.9**	81.8	35.9	81.8	35.9
657.xz_s	256	**215**	**28.8**	215	28.7	215	28.8	512	215	28.8	**215**	**28.8**	214	28.9

SPECspeed®2017_int_base = 17.8

SPECspeed®2017_int_peak = 18.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
Mitigation notes:
gather_data_sampling: Not affected; itlb_multihit: Not affected; l1tf: Not affected;
mds: Not affected; meltdown: Not affected; mmio_stale_data: Not affected;
reg_file_data_sampling: Not affected; retbleed: Not affected; spec_rstack_overflow: Not affected;
spec_store_bypass: Mitigation: Speculative Store Bypass disabled via prctl and seccomp;
spectre_v1: Mitigation: usercopy/swapgs barriers and __user pointer sanitization;
spectre_v2: Mitigation: Enhanced / Automatic IBRS; IBPB: conditional; STIBP: always-on;
srdbs: Not affected; tsx_async_abort: Not affected.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-511"
LD_LIBRARY_PATH =
     "/home/SPEC_CPU_2017_AOCC/amd_speed_aocc500_znver5_A_lib/lib:/home/SPEC_CPU_2017_AOCC/amd_speed_aocc50
     0_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "512"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-511"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04
```

Platform Notes

```
BIOS Settings:
                SMT Control                     : Enabled
                Power Profile Selection         : High Performance Mode
                TDP Control                     : Manual
                TDP                             : 500
                PPT Control                     : Manual
                PPT                             : 500
                Determinism Control             : Manual
                NUMA Nodes Per Socket           : NPS1
                Performance Mode                : Custom
                ACPI CST C2 Latency             : 18
                BoostFmaxEn                     : Manual
```

(Continued on next page)

Platform Notes (Continued)

```
                BoostFmax                       : 4100
                L1 Stride Prefetcher            : Disabled
                ASPM Control                    : Disabled
                CPPC                            : Disabled
                Memory Interleaving             : Disabled
                Memory Target Speed             : 6400

 Sysinfo program /home/SPEC_CPU_2017_AOCC/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on test Wed Jul  2 08:31:47 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.16)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux test 5.15.0-119-generic #129-Ubuntu SMP Fri Aug 2 19:25:20 UTC 2024 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    08:31:47 up 6 min,  1 user,  load average: 0.31, 1.96, 1.48
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                08:30   27.00s  1.03s  0.14s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   time(seconds)        unlimited
   file(blocks)         unlimited
   data(kbytes)         unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 2097152
   process              6189886
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 python3 ./run_amd_speed_aocc500_znver5_A1.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/SPEC_CPU_2017_AOCC

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9755 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002147
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 128
    siblings        : 256
    2 physical ids (chips)
    512 processors (hardware threads)
    physical id 0: core ids 0-127
    physical id 1: core ids 0-127
    physical id 0: apicids 0-255
    physical id 1: apicids 256-511
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               512
  On-line CPU(s) list:                  0-511
  Vendor ID:                            AuthenticAMD
  Model name:                           AMD EPYC 9755 128-Core Processor
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   2
```

(Continued on next page)

Platform Notes (Continued)

```
  Core(s) per socket:                  128
  Socket(s):                           2
  Stepping:                            1
  Frequency boost:                     enabled
  CPU max MHz:                         4121.1909
  CPU min MHz:                         1500.0000
  BogoMIPS:                            5392.01
  Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                       rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
                                       aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1
                                       sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                       cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                       osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                       perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd
                                       mba ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1
                                       avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx
                                       smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl
                                       xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                       cqm_mbm_local avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru
                                       wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                                       vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                                       v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
                                       avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                       avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b
                                       overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d
  Virtualization:                      AMD-V
  L1d cache:                           12 MiB (256 instances)
  L1i cache:                           8 MiB (256 instances)
  L2 cache:                            256 MiB (256 instances)
  L3 cache:                            1 GiB (32 instances)
  NUMA node(s):                        2
  NUMA node0 CPU(s):                   0-127,256-383
  NUMA node1 CPU(s):                   128-255,384-511
  Vulnerability Gather data sampling:  Not affected
  Vulnerability Itlb multihit:         Not affected
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                       always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      12M   12 Data            1    64        1             64
     L1i       32K       8M    8 Instruction     1    64        1             64
     L2         1M     256M   16 Unified         2  1024        1             64
     L3        32M       1G   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
```


(Continued on next page)

Platform Notes (Continued)

```
  available: 2 nodes (0-1)
  node 0 cpus: 0-127,256-383
  node 0 size: 773597 MB
  node 0 free: 770488 MB
  node 1 cpus: 128-255,384-511
  node 1 size: 773982 MB
  node 1 free: 771848 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584722084 kB

------------------------------------------------------------
10. who -r
  run-level 5 Jul 2 08:27

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.16)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
  * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
                   binfmt-support blk-availability cloud-config cloud-final cloud-init cloud-init-local
                   console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common
                   grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent
                   multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
                   setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                   systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 vgauth wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync ufw upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
                   wpa_supplicant@
  generated        apport
  indirect         uuidd
  masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                   x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-5.15.0-119-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.70 GHz.
```

(Continued on next page)

Platform Notes (Continued)

```
                    The governor "performance" may decide which speed to use
                    within this range.
      boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0:  2800MHz

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.5 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/SPEC_CPU_2017_AOCC
  Filesystem                     Type  Size  Used Avail Use% Mounted on
  /dev/mapper/ubuntu--vg-ubuntu--lv ext4  590G   20G  540G   4% /

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 21. /sys/devices/virtual/dmi/id
     Vendor:         COMPAL
     Product:        COMPAL SERVER
     Product Family: COMPAL
     Serial:         7901567500001

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x Samsung M321R8GA0EB2-CCPKC 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      10.23.00
    BIOS Date:         05/22/2025
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: `basepeak = yes`

602.gcc_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

605.mcf_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

625.x264_s: `basepeak = yes`

657.xz_s: `Same as 602.gcc_s`

C++ benchmarks:

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt -fvirtual-function-elimination -fvisibility=hidden -mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang`

631.deepsjeng_s: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-AMD_V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-AMD_V1.1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-02 04:31:47-0400.
Report generated on 2025-08-12 15:47:46 by CPU2017 PS formatter v6716.
Originally published on 2025-08-12.