Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

D55Q-2U (Intel Xeon 6780E)

SPECspeed®2017_fp_base = 324

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Aug-2025
Hardware Availability: Sep-2024
Software Availability: Jun-2024

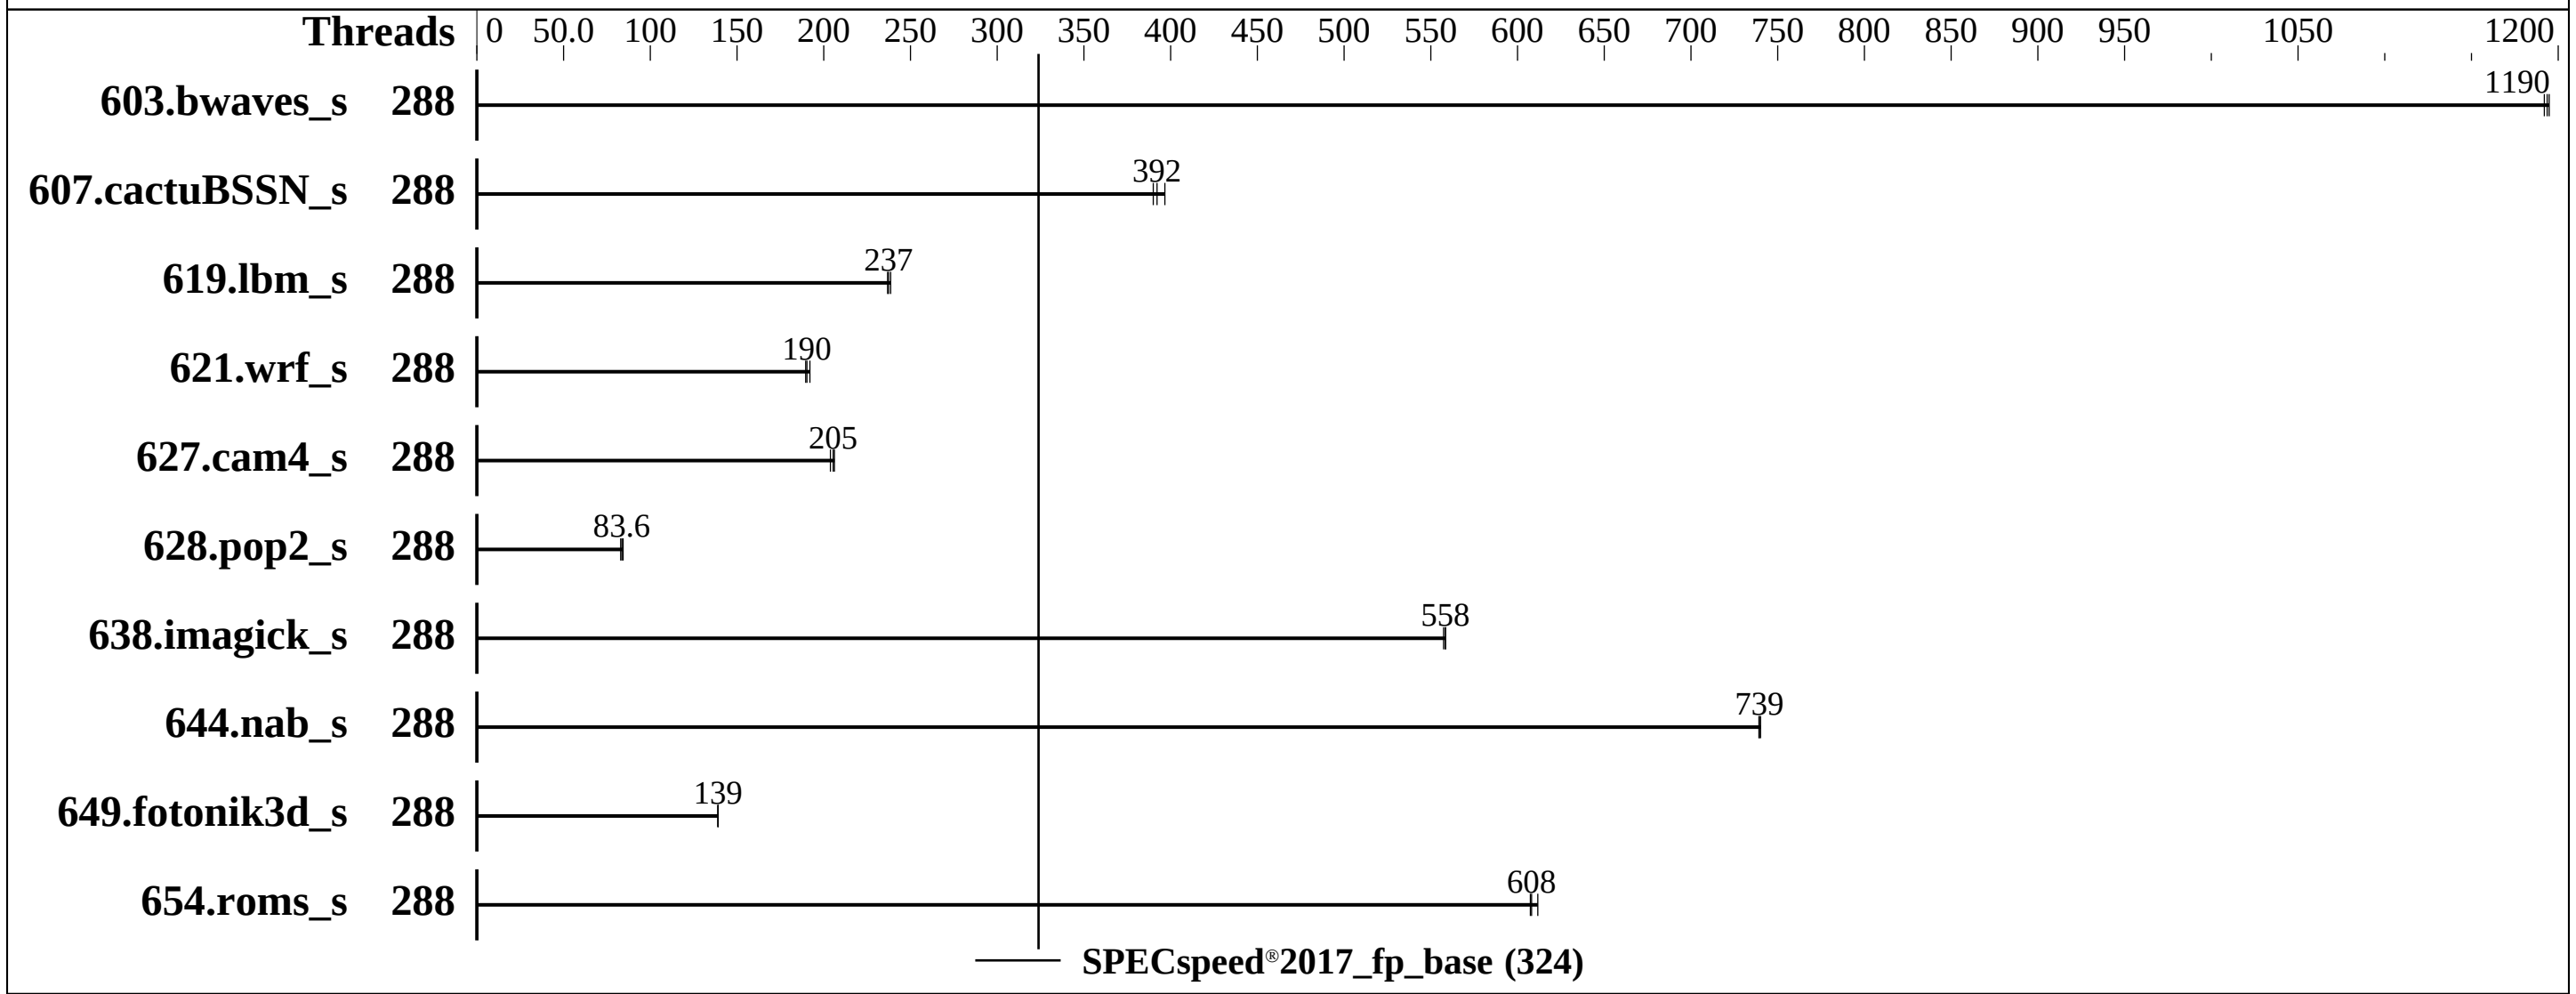

Hardware

CPU Name: Intel Xeon 6780E
Max MHz: 3000
Nominal: 2200
Enabled: 144 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 4 MB I+D on chip per core
L3: 108 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 960 GB on xfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 3A16.QCT001 released Mar-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

	Base							Peak						
Benchmark	**Threads**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Threads**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
603.bwaves_s	288	49.5	1190	**49.4**	**1190**	49.4	1190							
607.cactuBSSN_s	288	42.0	397	42.7	390	**42.5**	**392**							
619.lbm_s	288	22.1	237	**22.1**	**237**	22.0	239							
621.wrf_s	288	69.8	190	68.9	192	**69.5**	**190**							
627.cam4_s	288	43.0	206	**43.1**	**205**	43.5	204							
628.pop2_s	288	141	84.3	143	82.9	**142**	**83.6**							
638.imagick_s	288	**25.8**	**558**	25.9	557	25.8	558							
644.nab_s	288	23.6	739	23.6	740	**23.6**	**739**							
649.fotonik3d_s	288	**65.5**	**139**	65.5	139	65.6	139							
654.roms_s	288	25.9	607	25.7	612	**25.9**	**608**							

SPECspeed®2017_fp_base = 324

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration
Hardware P-States set to Disable
```

(Continued on next page)

Platform Notes (Continued)

```
Package C State set to C6(non Retention) state
Energy/Performance Bias set to Performance
LLC dead line alloc set to Disable
DCU Streamer Prefetcher set to Enable

 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Aug  5 23:04:53 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    23:04:53 up 58 min,  1 user,  load average: 178.52, 230.92, 235.52
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                22:07   57:41   1.94s  0.00s /bin/bash ./test.sh

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
  pending signals                 (-i) 4123761
  max locked memory       (kbytes, -l) unlimited
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024000
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4123761
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 /bin/bash ./test.sh
 /bin/bash ./test.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=288 --tune base -o all --define smt-on
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=288 --tune base --output_format all --define
   smt-on --define drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.339/templogs/preenv.fpspeed.339.0.log --lognum 339.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6780E
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 175
    stepping        : 3
    microcode       : 0x3000330
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 144
    siblings        : 144
    2 physical ids (chips)
    288 processors (hardware threads)
    physical id 0: core ids 0-143
    physical id 1: core ids 0-143
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
    32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
    4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
    ,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
    physical id 1: apicids
    512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
    64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
    6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
    ,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,
    722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,7
    74,776,778,780,782,784,786,788,790,792,794,796,798
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
```

(Continued on next page)

Platform Notes (Continued)

```
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                       x86_64
  CPU op-mode(s):                     32-bit, 64-bit
  Address sizes:                      52 bits physical, 48 bits virtual
  Byte Order:                         Little Endian
  CPU(s):                             288
  On-line CPU(s) list:                0-287
  Vendor ID:                          GenuineIntel
  BIOS Vendor ID:                     Intel(R) Corporation
  Model name:                         Intel(R) Xeon(R) 6780E
  BIOS Model name:                    Intel(R) Xeon(R) 6780E  CPU @ 2.2GHz
  BIOS CPU family:                    179
  CPU family:                         6
  Model:                              175
  Thread(s) per core:                 1
  Core(s) per socket:                 144
  Socket(s):                          2
  Stepping:                           3
  CPU(s) scaling MHz:                 30%
  CPU max MHz:                        3000.0000
  CPU min MHz:                        800.0000
  BogoMIPS:                           4400.00
  Flags:                              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                      pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                      nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                      pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                      3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                      ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                      vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                      rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
                                      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                      split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
                                      pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi umip pku ospke
                                      waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote
                                      movdiri movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt
                                      flush_l1d arch_capabilities
  Virtualization:                     VT-x
  L1d cache:                          9 MiB (288 instances)
  L1i cache:                          18 MiB (288 instances)
  L2 cache:                           288 MiB (72 instances)
  L3 cache:                           216 MiB (2 instances)
  NUMA node(s):                       2
  NUMA node0 CPU(s):                  0-143
  NUMA node1 CPU(s):                  144-287
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:        Not affected
  Vulnerability L1tf:                 Not affected
  Vulnerability Mds:                  Not affected
  Vulnerability Meltdown:             Not affected
  Vulnerability Mmio stale data:      Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:             Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
    Vulnerability Spec rstack overflow:   Not affected
    Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
    Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
    Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                          PBRSB-eIBRS Not affected; BHI BHI_DIS_S
    Vulnerability Srbds:                  Not affected
    Vulnerability Tsx async abort:        Not affected

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
       L1d       32K       9M    8 Data            1     64        1             64
       L1i       64K      18M    8 Instruction     1    128        1             64
       L2         4M     288M   16 Unified         2   4096        1             64
       L3       108M     216M   12 Unified         3 147456        1             64

  ------------------------------------------------------------
  8. numactl --hardware
  NOTE: a numactl 'node' might or might not correspond to a physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0-143
    node 0 size: 515396 MB
    node 0 free: 513888 MB
    node 1 cpus: 144-287
    node 1 size: 515570 MB
    node 1 free: 514456 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  ------------------------------------------------------------
  9. /proc/meminfo
     MemTotal:       1055709868 kB

  ------------------------------------------------------------
  10. who -r
    run-level 3 Aug 5 22:07

  ------------------------------------------------------------
  11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target  Status
    multi-user      running

  ------------------------------------------------------------
  12. Services, from systemctl list-unit-files
    STATE            UNIT FILES
    enabled          YaST2-Firstboot apparmor auditd cron getty@ issue-generator kbdsettings postfix
                     purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                     wickedd-dhcp6 wickedd-nanny
    enabled-runtime  systemd-remount-fs
    disabled         YaST2-Second-Stage autofs autoyast-initscripts blk-availability boot-sysctl
                     ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell
                     display-manager ebtables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged
                     hwloc-dump-hwdata ipmi ipmievd irqbalance issue-add-ssh-keys kdump kdump-early
                     kdump-notify kexec-load klog lunmask lvm2-monitor man-db-create multipathd nfs nfs-blkmap
                     nscd nvmefc-boot-connections nvmf-autoconnect rpcbind rpmconfigcheck rsyncd rsyslog
                     serial-getty@ smartd smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                     systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                     systemd-timesyncd tuned udisks2 vncserver@
    indirect         systemd-userdbd wickedd
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=ef37f719-a8b7-425b-a775-187849075d47
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=372M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 167:
    current policy: frequency should be within 800 MHz and 3.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: balanced

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing                1
  kernel.randomize_va_space            2
  vm.compaction_proactiveness         20
  vm.dirty_background_bytes            0
  vm.dirty_background_ratio           10
  vm.dirty_bytes                       0
  vm.dirty_expire_centisecs         3000
  vm.dirty_ratio                      20
  vm.dirty_writeback_centisecs       500
  vm.dirtytime_expire_seconds      43200
  vm.extfrag_threshold               500
  vm.min_unmapped_ratio                1
  vm.nr_hugepages                      0
  vm.nr_hugepages_mempolicy            0
  vm.nr_overcommit_hugepages           0
  vm.swappiness                       60
  vm.watermark_boost_factor        15000
  vm.watermark_scale_factor           10
  vm.zone_reclaim_mode                 0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
```

(Continued on next page)

Platform Notes (Continued)

```
    max_ptes_shared           256
    max_ptes_swap              64
    pages_to_scan            4096
    scan_sleep_millisecs    10000

 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /root/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p1 xfs   615G   50G  565G   9% /

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         Quanta Cloud Technology Inc.
     Product:        QuantaGrid D55Q-2U

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     4x Samsung M321R8GA0PB1-CCPPC 64 GB 2 rank 6400
     6x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
     4x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
     2x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      3A16.QCT001
    BIOS Date:         03/20/2025
    BIOS Revision:     5.35
    Firmware Revision: 3.16
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Birch_Stream-Platform-Settings-V1.4.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Birch_Stream-Platform-Settings-V1.4.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-05 11:04:52-0400.
Report generated on 2025-08-26 17:50:41 by CPU2017 PS formatter v6716.
Originally published on 2025-08-26.