SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1160

CPU2017 License: 6865
Test Sponsor: Kaytus Systems Pte. Ltd.
Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2025
Hardware Availability: Apr-2025
Software Availability: Jun-2024

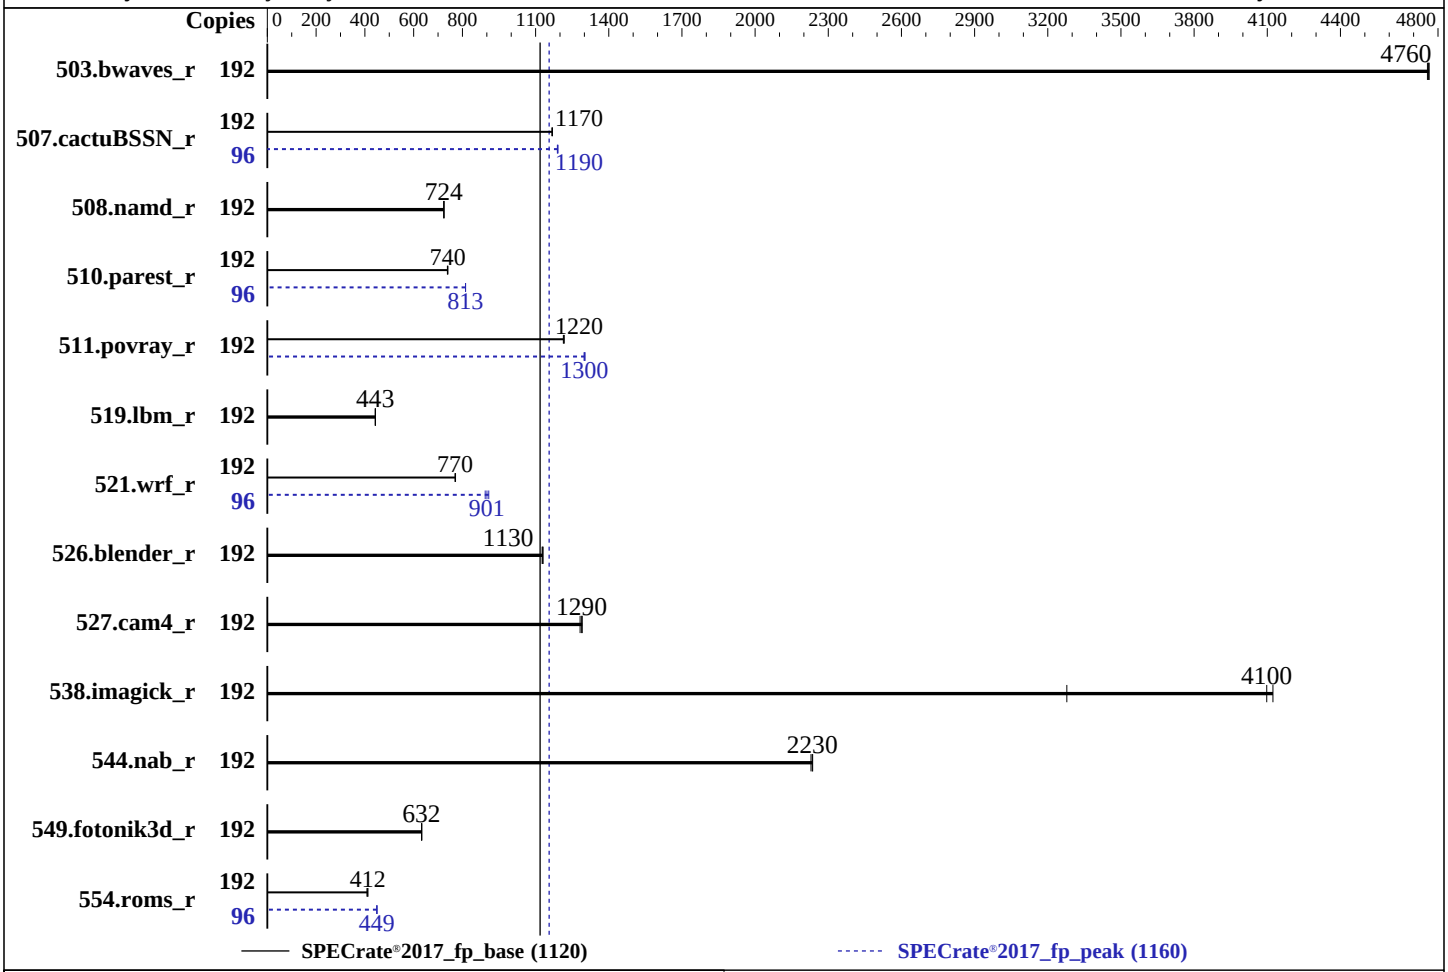

Hardware

CPU Name:	Intel Xeon Platinum 8558P
Max MHz:	4000
Nominal:	2700
Enabled:	96 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	260 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC5-5600B-R)
Storage:	1 x 960 GB NVME SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 06.08.06 released Jun-2025
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

KR2280V2 (Intel Xeon Platinum 8558P)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1160

CPU2017 License: 6865
Test Sponsor: Kaytus Systems Pte. Ltd.
Tested by: Kaytus Systems Pte. Ltd.

Test Date: Aug-2025
Hardware Availability: Apr-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	405	4760	**404**	**4760**	404	4760	192	405	4760	**404**	**4760**	404	4760
507.cactuBSSN_r	192	208	1170	208	1170	**208**	**1170**	96	102	1190	**102**	**1190**	102	1190
508.namd_r	192	**252**	**724**	252	724	252	724	192	**252**	**724**	252	724	252	724
510.parest_r	192	680	738	**679**	**740**	679	740	96	309	813	**309**	**813**	309	812
511.povray_r	192	**369**	**1220**	368	1220	369	1210	192	**345**	**1300**	345	1300	344	1300
519.lbm_r	192	**457**	**443**	457	443	457	443	192	**457**	**443**	457	443	457	443
521.wrf_r	192	557	772	**558**	**770**	558	770	96	241	893	237	908	**239**	**901**
526.blender_r	192	259	1130	260	1130	**259**	**1130**	192	259	1130	260	1130	**259**	**1130**
527.cam4_r	192	262	1280	260	1290	**261**	**1290**	192	262	1280	260	1290	**261**	**1290**
538.imagick_r	192	**117**	**4100**	146	3280	116	4120	192	**117**	**4100**	146	3280	116	4120
544.nab_r	192	145	2240	145	2230	**145**	**2230**	192	145	2240	145	2230	**145**	**2230**
549.fotonik3d_r	192	**1183**	**632**	1184	632	1181	634	192	**1183**	**632**	1184	632	1181	634
554.roms_r	192	747	408	740	412	**741**	**412**	96	340	449	**340**	**449**	340	449

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1160

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
SNC set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Aug 30 13:18:21 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   13:18:21 up  6:50,  1 user,  load average: 122.24, 173.59, 183.26
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                06:33    5:43m  1.88s  0.06s -bash
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 2060253
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 2060253
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=31
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) PLATINUM 8558P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000291
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
    cpu cores       : 48
    siblings        : 96
    2 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-47
    physical id 1: core ids 0-47
    physical id 0: apicids 0-95
    physical id 1: apicids 128-223
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               192
  On-line CPU(s) list:                  0-191
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           INTEL(R) XEON(R) PLATINUM 8558P
  BIOS Model name:                      INTEL(R) XEON(R) PLATINUM 8558P  CPU @ 2.7GHz
  BIOS CPU family:                      179
  CPU family:                           6
  Model:                                207
  Thread(s) per core:                   2
  Core(s) per socket:                   48
  Socket(s):                            2
  Stepping:                             2
  CPU(s) scaling MHz:                   20%
  CPU max MHz:                          4000.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             5400.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                        cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                        ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                                        invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                                        wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                                        hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                        vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                        rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                        amx_int8 flush_l1d arch_capabilities
  L1d cache:                            4.5 MiB (96 instances)
  L1i cache:                            3 MiB (96 instances)
  L2 cache:                             192 MiB (96 instances)
  L3 cache:                             520 MiB (2 instances)
  NUMA node(s):                         4
  NUMA node0 CPU(s):                    0-23,96-119
  NUMA node1 CPU(s):                    24-47,120-143
  NUMA node2 CPU(s):                    48-71,144-167
  NUMA node3 CPU(s):                    72-95,168-191
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                        PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.5M   12 Data            1     64        1             64
     L1i       32K       3M    8 Instruction     1     64        1             64
     L2         2M     192M   16 Unified         2   2048        1             64
     L3       260M     520M   20 Unified         3 212992        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-23,96-119
  node 0 size: 128504 MB
  node 0 free: 107089 MB
  node 1 cpus: 24-47,120-143
  node 1 size: 129011 MB
  node 1 free: 110060 MB
  node 2 cpus: 48-71,144-167
  node 2 size: 128972 MB
  node 2 free: 108451 MB
  node 3 cpus: 72-95,168-191
  node 3 size: 128600 MB
  node 3 free: 109570 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527451020 kB

------------------------------------------------------------
10. who -r
  run-level 3 Aug 30 06:33

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor auditd cron getty@ irqbalance issue-generator kbdsettings kdump kdump-early
                   kdump-notify nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                   systemd-pstore
  enabled-runtime  systemd-remount-fs
```

(Continued on next page)

Platform Notes (Continued)

```
  disabled         boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                   exchange-bmc-os-info fsidd grub2-once haveged ipmievd issue-add-ssh-keys kexec-load
                   lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  generated        jexec
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=6394587f-ed63-4c08-bf95-cf0e1de4a763
  mitigations=off
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=371M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 104:
    current policy: frequency should be within 800 MHz and 4.00 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/CPU2017
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 btrfs  894G  526G  368G  59% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         KAYTUS
    Product:        KR2280-X2-A0-R0-00
    Product Family: Not specified
    Serial:         012345678

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    3x Hynix HMCG88AGBRA618N 32 GB 2 rank 5600
    6x Hynix HMCG88AGBRA619N 32 GB 2 rank 5600
    7x Hynix HMCG88AGBRA623N 32 GB 2 rank 5600


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      06.08.06
   BIOS Date:         06/16/2025
```

Compiler Version Notes

```
==============================================================================================================
C              | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++            | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs`
`-fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1)
`-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse`
`-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int`
`-mprefer-vector-width=512 -ljemalloc`
`-L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast`
`-ffast-math -flto -mfpmath=sse -funroll-loops`
`-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512`
`-nostandard-realloc-lhs -align array32byte -auto -ljemalloc`
`-L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-intel-V1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-intel-V1.0.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-30 13:18:20-0400.
Report generated on 2025-09-23 16:55:04 by CPU2017 PS formatter v6716.
Originally published on 2025-09-23.