



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061


Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

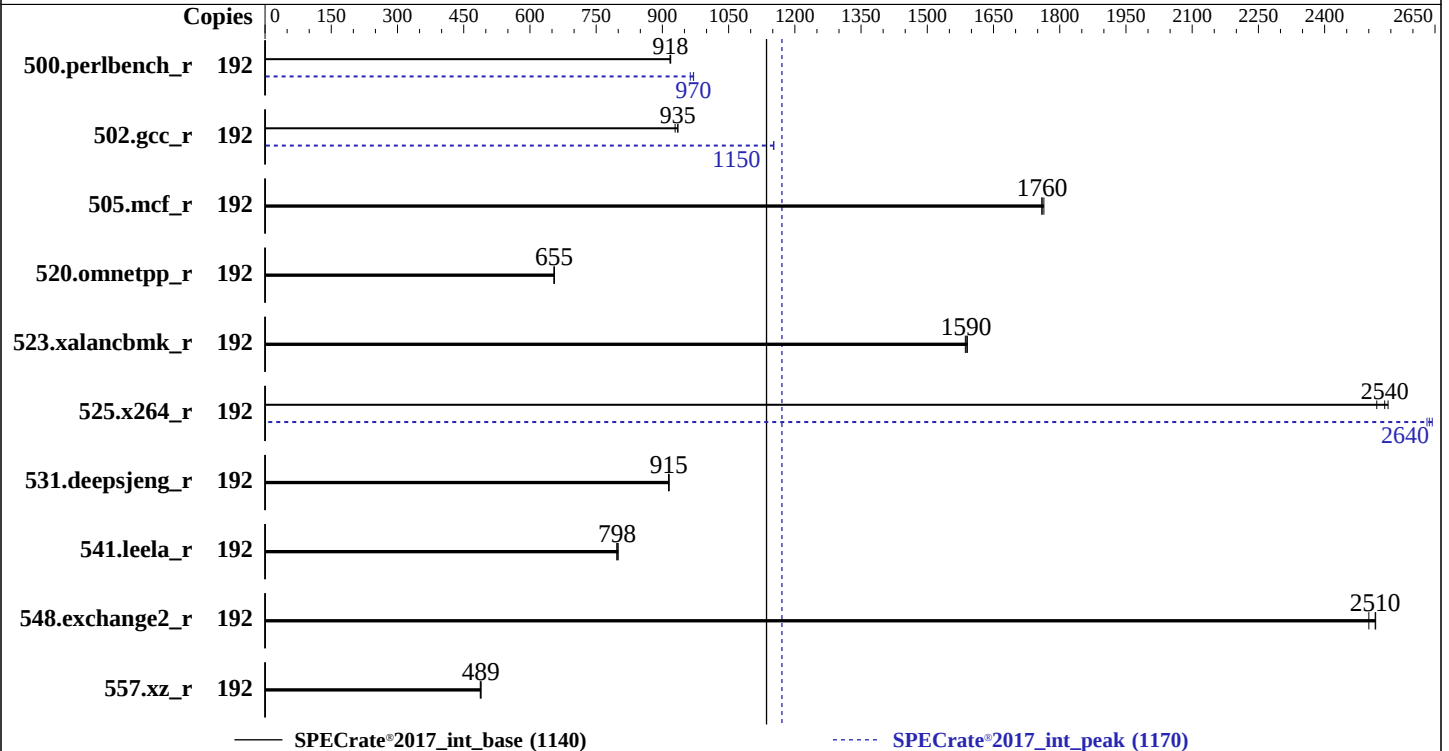

Hardware

CPU Name: Intel Xeon 6747P
Max MHz: 3900
Nominal: 2700
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 288 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 4Rx8 PC5-88/64B-M, running at 8000)
Storage: 1 x 3.84 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 05.25.03.11 released Aug-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	333	919	333	917	333	918	192	315	970	317	963	315	971
502.gcc_r	192	291	935	293	929	291	935	192	236	1150	236	1150	236	1150
505.mcf_r	192	176	1760	176	1760	176	1760	192	176	1760	176	1760	176	1760
520.omnetpp_r	192	384	655	385	655	385	655	192	384	655	385	655	385	655
523.xalancbmk_r	192	127	1590	128	1590	128	1590	192	127	1590	128	1590	128	1590
525.x264_r	192	132	2540	133	2540	134	2520	192	127	2640	127	2640	128	2630
531.deepsjeng_r	192	241	915	240	915	241	914	192	241	915	240	915	241	914
541.leela_r	192	397	800	399	797	399	798	192	397	800	399	797	399	798
548.exchange2_r	192	200	2520	201	2500	200	2510	192	200	2520	201	2500	200	2510
557.xz_r	192	424	489	424	489	425	487	192	424	489	424	489	425	487

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
LLC dead line alloc = Disabled
Patrol Scrub = Disabled
Intel VT for Directed I/O (VT-d) = Disabled
SR-IOV Support = Disabled
Sub NUMA(SNC) = Enable
Intel SST-PP set to Profile3

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Sep 12 10:19:58 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024
(36c1e09/lp) x86_64 x86_64 x86_64 GNU/Linux

2. w
10:19:58 up 16:01, 4 users, load average: 0.56, 18.97, 85.05
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 192.2.211.171 Thu19 4.00s 0.21s 0.00s /bin/sh ./cpu_int.sh

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Platform Notes (Continued)

root	pts/1	192.2.211.171	Thu19	6.00s	0.93s	0.01s	-bash
root	pts/2	192.2.211.171	09:21	31.00s	0.16s	0.16s	-bash
root	pts/3	192.2.211.171	09:25	28:46	0.06s	0.06s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4124619
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4124619
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42 3
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/1
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.069/tempslogs/preenv.intrate.069.0.log --lognum 069.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) 6747P
vendor_id	: GenuineIntel
cpu family	: 6
model	: 173
stepping	: 1
microcode	: 0x10003c2
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores	: 48
siblings	: 96
2 physical ids (chips)	
192 processors (hardware threads)	
physical id 0: core ids 0-23,64-87	

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Platform Notes (Continued)

physical id 1: core ids 0-23,64-87

physical id 0: apicids 0-47,128-175

physical id 1: apicids 256-303,384-431

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      192
On-line CPU(s) list:         0-191
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6747P
BIOS Model name:             Intel(R) Xeon(R) 6747P   CPU @ 2.7GHz
BIOS CPU family:             179
CPU family:                  6
Model:                      173
Thread(s) per core:          2
Core(s) per socket:          48
Socket(s):                   2
Stepping:                    1
CPU(s) scaling MHz:          31%
CPU max MHz:                 3900.0000
CPU min MHz:                 800.0000
BogoMIPS:                   5400.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                             rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                             clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                             avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                             avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                             bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   4.5 MiB (96 instances)
L1i cache:                   6 MiB (96 instances)
L2 cache:                    192 MiB (96 instances)
L3 cache:                    576 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-23,96-119
NUMA node1 CPU(s):           24-47,120-143
NUMA node2 CPU(s):           48-71,144-167
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Platform Notes (Continued)

NUMA node3 CPU(s): 72-95,168-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	64K	6M	16	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	288M	576M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 257544 MB
node 0 free: 246180 MB
node 1 cpus: 24-47,120-143
node 1 size: 257996 MB
node 1 free: 247548 MB
node 2 cpus: 48-71,144-167
node 2 size: 258035 MB
node 2 free: 248128 MB
node 3 cpus: 72-95,168-191
node 3 size: 257609 MB
node 3 free: 247660 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1055934164 kB

10. who -r

run-level 3 Sep 11 18:18

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
graphical running

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
display-manager getty@ irqbalance issue-generator kbdsettings kdump kdump-early
kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
wpa_supplicant
enabled-runtime systemd-remount-fs
disabled        accounts-daemon autofs autovast-initscripts blk-availability bluetooth-mesh boot-sysctl
ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell
dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once
haveged ipmi ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create
multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd
rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd
systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysex
systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower
vncserver@ wpa_supplicant@
indirect        pcsd saned@ systemd-userdbd wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=340a3597-b723-40ec-9271-f634cfe77411
splash=silent
resume=/dev/disk/by-uuid/63163e0d-6dab-4d02-90fb-3a6f9615eeab
mitigations=auto
quiet
security=apparmor
crashkernel=383M,high
crashkernel=72M,low
3
```

14. cpupower frequency-info

```
analyzing CPU 49:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Platform Notes (Continued)

```
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda7       xfs   667G  508G  159G  77% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:         ZTE
Product:        R5300 G6
Product Family: Server
Serial:         219587958508
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  4x Hynix HMC98BDJHA380N 64 GB 4 rank 8800, configured at 8000
  4x Hynix HMC98BDJHA383N 64 GB 4 rank 8800, configured at 8000
  4x Hynix HMC98BDJHA462N 64 GB 4 rank 8800, configured at 8000
  4x Hynix HMC98BDJHA464N 64 GB 4 rank 8800, configured at 8000
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Platform Notes (Continued)

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 05.25.03.11
BIOS Date: 08/19/2025
BIOS Revision: 5.25

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G6 Server System
(2.70 GHz, Intel Xeon 6747P)

SPECrate®2017_int_base = 1140

SPECrate®2017_int_peak = 1170

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Sep-2025

Hardware Availability: May-2025

Software Availability: May-2025

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-GNR-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-GNR-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-11 22:19:58-0400.

Report generated on 2025-10-17 12:07:36 by CPU2017 PDF formatter v6716.

Originally published on 2025-10-17.