



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

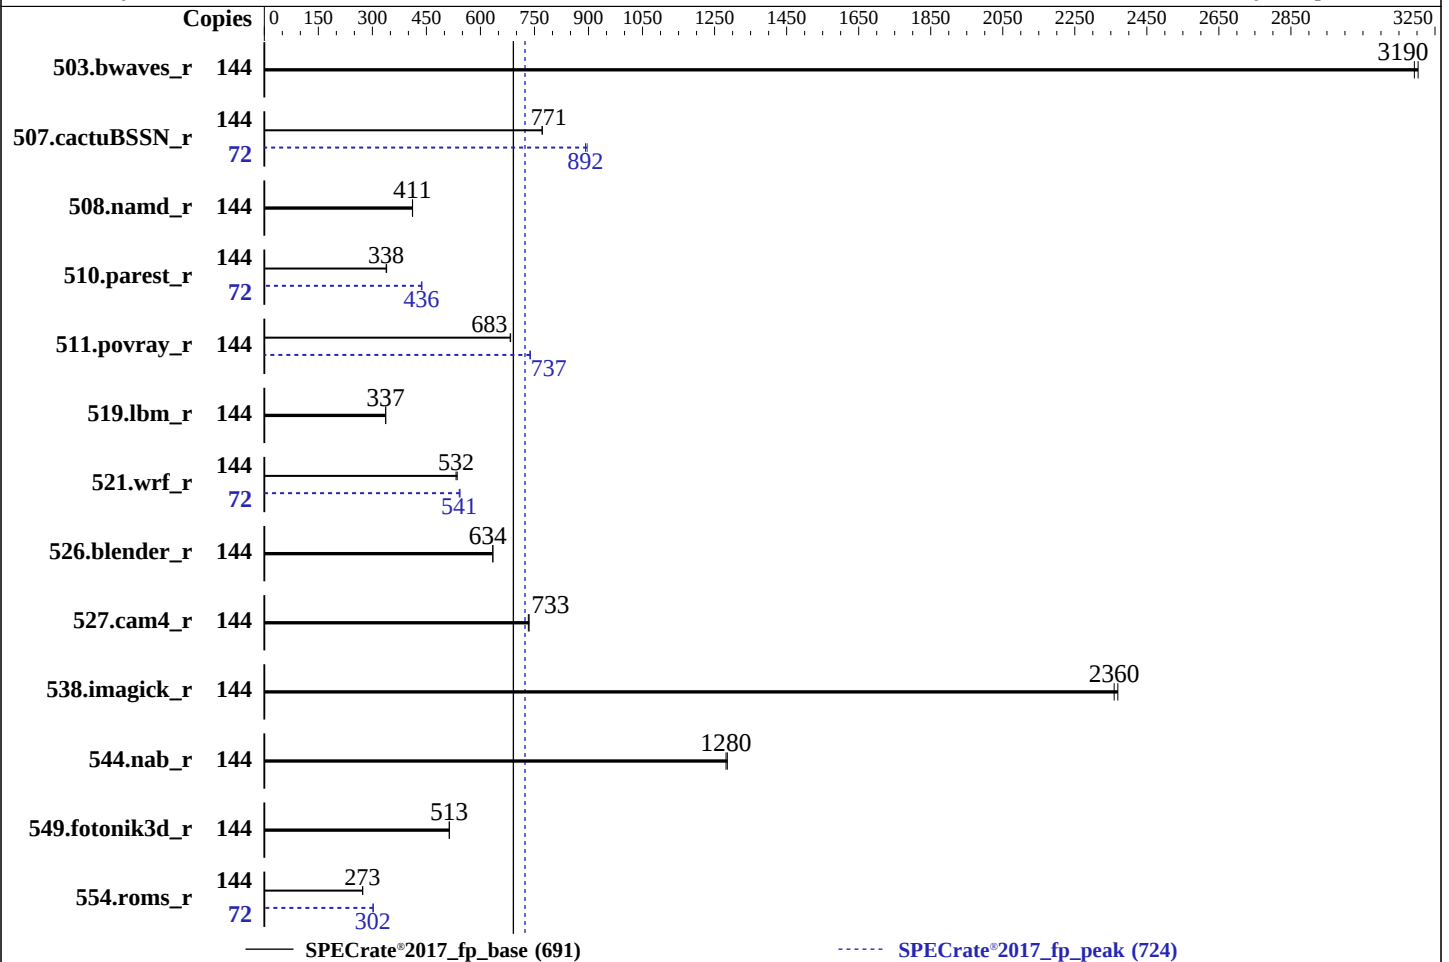

Hardware

CPU Name: Intel Xeon Platinum 8452Y
Max MHz: 3200
Nominal: 2000
Enabled: 72 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 67.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 90 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 2.7.5 released Jul-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	451	3200	<u>452</u>	<u>3190</u>			144	451	3200	<u>452</u>	<u>3190</u>		
507.cactuBSSN_r	144	<u>236</u>	<u>771</u>	236	772			72	102	896	<u>102</u>	<u>892</u>		
508.namd_r	144	<u>333</u>	<u>411</u>	332	412			144	<u>333</u>	<u>411</u>	332	412		
510.parest_r	144	1109	340	<u>1114</u>	<u>338</u>			72	<u>432</u>	<u>436</u>	430	438		
511.povray_r	144	<u>493</u>	<u>683</u>	492	684			144	<u>456</u>	<u>737</u>	455	739		
519.lbm_r	144	<u>451</u>	<u>337</u>	450	337			144	<u>451</u>	<u>337</u>	450	337		
521.wrf_r	144	602	536	<u>606</u>	<u>532</u>			72	297	543	<u>298</u>	<u>541</u>		
526.blender_r	144	346	635	<u>346</u>	<u>634</u>			144	346	635	<u>346</u>	<u>634</u>		
527.cam4_r	144	343	735	<u>344</u>	<u>733</u>			144	343	735	<u>344</u>	<u>733</u>		
538.imagick_r	144	<u>152</u>	<u>2360</u>	151	2370			144	<u>152</u>	<u>2360</u>	151	2370		
544.nab_r	144	<u>189</u>	<u>1280</u>	189	1290			144	<u>189</u>	<u>1280</u>	189	1290		
549.fotonik3d_r	144	1093	514	<u>1093</u>	<u>513</u>			144	1093	514	<u>1093</u>	<u>513</u>		
554.roms_r	144	<u>839</u>	<u>273</u>	837	273			72	<u>379</u>	<u>302</u>	378	303		

SPECrate®2017_fp_base = 691

SPECrate®2017_fp_peak = 724

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 90 GB ramdisk created with the cmd: "mount -t tmpfs -o size=90G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Virtualization Technology : Disabled
DCU Streamer Prefetcher : Disabled
Sub NUMA Cluster : 4-Way Clustering
UMA Based Clustering Status : Disable
Dead Line LLC Alloc : Disabled
x2APIC Mode : Disabled

System Profile : Custom
Energy Efficient Turbo : Enabled
C-States : Autonomous
Memory Patrol Scrub : Disabled
Uncore Frequency : Dynamic
DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on GN01104-XE9680 Tue Sep 9 20:52:27 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Platform Notes (Continued)

```
1. uname -a
Linux GN01104-XE9680 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT 2024
x86_64 x86_64 x86_64 GNU/Linux

-----

2. w
20:52:27 up 12:21, 1 user, load average: 74.56, 124.56, 134.61
USER      TTY      LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      09:15    4:40m  1.62s  0.00s /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh
rate --define DL-VERS=6.3a --output_format html,pdf,txt

-----

3. Username
From environment variable $USER: root

-----

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority          (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4126031
max locked memory            (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4126031
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited

-----

5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.3a --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.3a --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-VERS=6.3a --output_format html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=72 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-VERS=6.3a --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
refrate fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log
--lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Platform Notes (Continued)

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8452Y
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000643
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 36
siblings        : 72
2 physical ids (chips)
144 processors (hardware threads)
physical id 0:  core ids 0-35
physical id 1:  core ids 0-35
physical id 0:  apicids 0-71
physical id 1:  apicids 128-199
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                144
On-line CPU(s) list:   0-143
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel
Model name:            Intel(R) Xeon(R) Platinum 8452Y
BIOS Model name:       Intel(R) Xeon(R) Platinum 8452Y
CPU family:            6
Model:                143
Thread(s) per core:    2
Core(s) per socket:    36
Socket(s):             2
Stepping:              8
CPU(s) scaling MHz:    100%
CPU max MHz:           3200.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                        dtcs64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid
                        dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                        f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                        cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fstrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Platform Notes (Continued)

```
                                avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
L1d cache:                    3.4 MiB (72 instances)
L1i cache:                    2.3 MiB (72 instances)
L2 cache:                     144 MiB (72 instances)
L3 cache:                     135 MiB (2 instances)
NUMA node(s):                 8
NUMA node0 CPU(s):            0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136
NUMA node1 CPU(s):            4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140
NUMA node2 CPU(s):            2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138
NUMA node3 CPU(s):            6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126, 134, 142
NUMA node4 CPU(s):            1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121, 129, 137
NUMA node5 CPU(s):            5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125, 133, 141
NUMA node6 CPU(s):            3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123, 131, 139
NUMA node7 CPU(s):            7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 103, 111, 119, 127, 135, 143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                   PBRSE-eIBRS SW sequence
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:     Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	67.5M	135M	15	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136
node 0 size: 128471 MB
node 0 free: 127624 MB
node 1 cpus: 4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140
node 1 size: 129019 MB
node 1 free: 123176 MB
node 2 cpus: 2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138
node 2 size: 129019 MB
node 2 free: 128258 MB
node 3 cpus: 6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126, 134, 142
node 3 size: 129019 MB
node 3 free: 128274 MB
node 4 cpus: 1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121, 129, 137
node 4 size: 129019 MB
node 4 free: 128172 MB
node 5 cpus: 5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125, 133, 141
node 5 size: 129019 MB
node 5 free: 128296 MB
node 6 cpus: 3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123, 131, 139
node 6 size: 129019 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Platform Notes (Continued)

```
node 6 free: 128284 MB
node 7 cpus: 7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143
node 7 size: 128962 MB
node 7 free: 123113 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  21  21  21  21
1:  12  10  12  12  21  21  21  21
2:  12  12  10  12  21  21  21  21
3:  12  12  12  10  21  21  21  21
4:  21  21  21  21  10  12  12  12
5:  21  21  21  21  12  10  12  12
6:  21  21  21  21  12  12  10  12
7:  21  21  21  21  12  12  12  10
```

```
9. /proc/meminfo
MemTotal:      1056307564 kB
```

```
10. who -r
run-level 3 Sep 9 08:31
```

```
11. Systemd service manager version: systemd 252 (252-32.el9_4)
Default Target    Status
multi-user        degraded
```

```
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* dnf-makecache.service loaded failed failed dnf makecache
```

```
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi-onboot
iscsi-starter kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor
microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
udisks2 upower
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower
debug-shell dnf-system-upgrade iprump iprinit iprupdate ipsec iscsi-init iscsid iscsiui
kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect psacct
rdisc rhcd rhsm rhsm-facts rpmbd-rebuild selinux-check-proper-disable serial-getty@
sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect iscsi sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot
```

```
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Platform Notes (Continued)

rhgb
quiet

15. cpupower frequency-info

analyzing CPU 92:

current policy: frequency should be within 800 MHz and 3.20 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version

os-release Red Hat Enterprise Linux 9.4 (Plow)

redhat-release Red Hat Enterprise Linux release 9.4 (Plow)

system-release Red Hat Enterprise Linux release 9.4 (Plow)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Platform Notes (Continued)

20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	90G	5.0G	86G	6%	/mnt/ramdisk

21. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge XE9680
Product Family: PowerEdge
Serial: GN01104

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 002C0632002C MTC40F2046S1RC56BG1 64 GB 2 rank 5600, configured at 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 2.7.5
BIOS Date: 07/31/2025
BIOS Revision: 2.7

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Base Portability Flags (Continued)

508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Peak Optimization Flags (Continued)

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapfirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 691

PowerEdge XE9680 (Intel Xeon Platinum 8452Y)

SPECrate®2017_fp_peak = 724

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.17x.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.17x.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-09 20:52:26-0400.

Report generated on 2025-10-07 16:38:13 by CPU2017 PDF formatter v6716.

Originally published on 2025-10-07.