



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042


Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

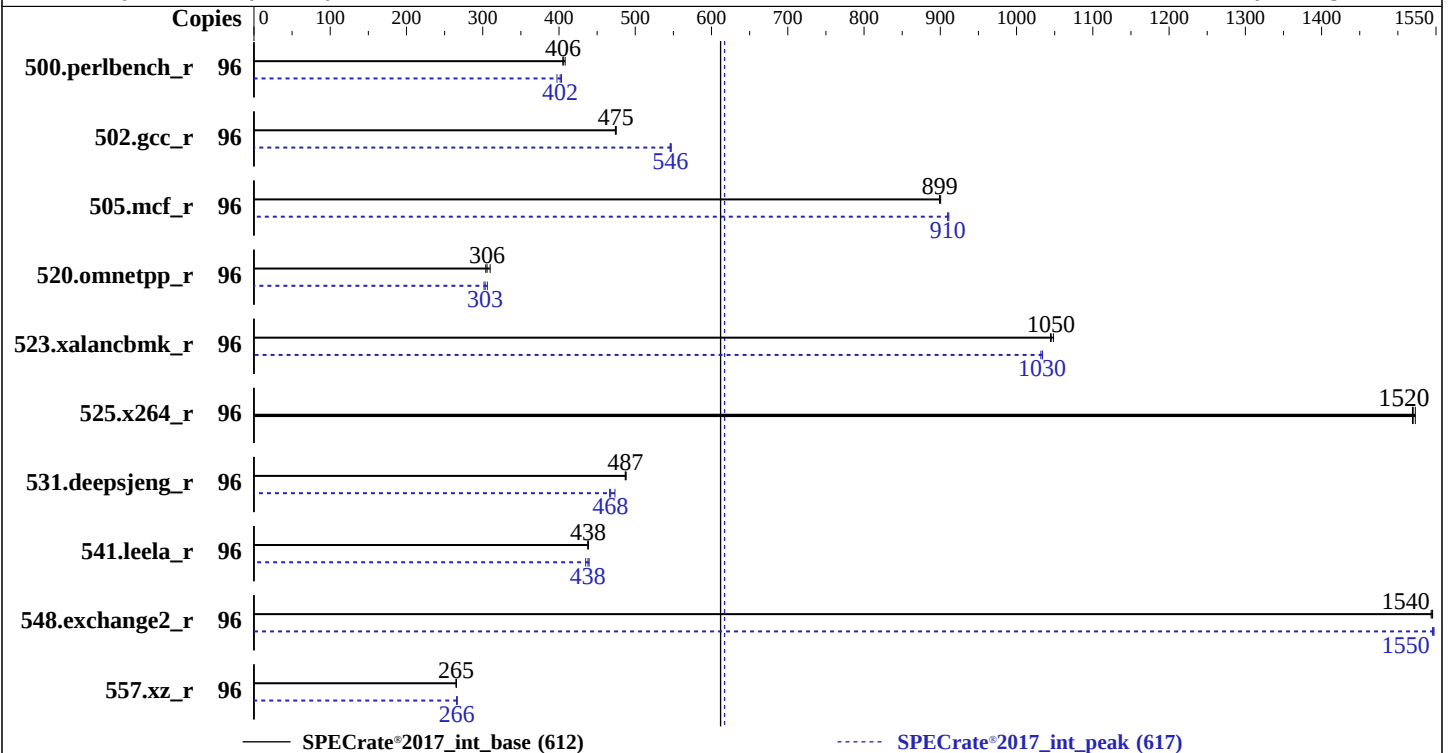

Hardware

CPU Name: AMD EPYC 9255
Max MHz: 4300
Nominal: 3200
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R)
Storage: 1 x 1 TB NVMe
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04 LTS
kernel version 6.14.0-29-generic
C/C++/Fortran: Version 5.0.0 of AOCC
Compiler: No
Parallel: Version ES312AMS.205T5 released Sep-2025
Firmware: ext4
File System: Run level 3 (multi-user)
System State: 64-bit
Base Pointers: 32/64-bit
Peak Pointers: None
Other: OS and BIOS set to prefer performance at the cost of additional power usage.
Power Management:



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	377	405	<u>377</u>	<u>406</u>	375	408	96	379	403	385	397	<u>381</u>	<u>402</u>
502.gcc_r	96	<u>286</u>	<u>475</u>	286	475	287	474	96	<u>249</u>	<u>546</u>	248	547	249	546
505.mcf_r	96	<u>173</u>	<u>899</u>	172	900	173	899	96	<u>170</u>	<u>910</u>	170	911	171	910
520.omnetpp_r	96	<u>412</u>	<u>306</u>	407	310	414	304	96	411	306	418	302	<u>415</u>	<u>303</u>
523.xalancbmk_r	96	96.7	1050	<u>97.0</u>	<u>1050</u>	97.1	1040	96	<u>98.1</u>	<u>1030</u>	98.0	1030	98.2	1030
525.x264_r	96	110	1520	111	1520	<u>111</u>	<u>1520</u>	96	110	1520	111	1520	<u>111</u>	<u>1520</u>
531.deepsjeng_r	96	226	487	225	488	<u>226</u>	<u>487</u>	96	236	466	232	473	<u>235</u>	<u>468</u>
541.leela_r	96	<u>363</u>	<u>438</u>	363	438	363	439	96	<u>363</u>	<u>438</u>	366	435	362	440
548.exchange2_r	96	<u>163</u>	<u>1540</u>	163	1550	163	1540	96	163	1550	163	1550	<u>163</u>	<u>1550</u>
557.xz_r	96	390	266	<u>391</u>	<u>265</u>	391	265	96	390	266	<u>390</u>	<u>266</u>	389	267

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2N-212)
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:always"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

cTDP: 400

Determinism Slider set to Power

ACPI SRAT L3 Cache as NUMA Domain: enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on amd-benchmark Wed Sep 24 18:03:47 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

22. dmidecode

23. BIOS

1. uname -a

```
Linux amd-benchmark 6.14.0-29-generic #29~24.04.1-Ubuntu SMP PREEMPT_DYNAMIC Thu Aug 14 16:52:50 UTC 2
x86_64 x86_64 x86_64 GNU/Linux
```

2. w

```
18:03:47 up 8 min, 1 user, load average: 0.44, 0.15, 0.05
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
amd       tty1     -               15:40    27.00s 0.07s  0.06s sudo su
```

3. Username

```
From environment variable $USER:  root
From the command 'logname':      amd
```

4. ulimit -a

```
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6190174
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

5. sysinfo process ancestry

```
/sbin/init splash
/bin/login -p --
-bash
sudo su
sudo su
su
bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9255 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2N-212)
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

microcode : 0xb00211a
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size : 192 4K pages
cpu cores : 24
siblings : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 1: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
physical id 1: apicids 64-75,80-91,96-107,112-123

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9255 24-Core Processor
BIOS Model name:	AMD EPYC 9255 24-Core Processor
	3.20GHz
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	24
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	57%
CPU max MHz:	4317.0000
CPU min MHz:	600.0000
BogoMIPS:	6390.36
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmisr avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b

Unknown CPU @

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

Virtualization: overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d
debug_swap amd_lbr_pmc_freeze
AMD-V
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-23,48-71
NUMA node1 CPU(s): 24-47,72-95
Vulnerability Gather data sampling: Not affected
Vulnerability Ghostwrite: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 773649 MB
node 0 free: 772345 MB
node 1 cpus: 24-47,72-95
node 1 size: 774068 MB
node 1 free: 772938 MB
node distances:
node 0 1
0: 10 32
1: 32 10

9. /proc/meminfo

MemTotal: 1584862956 kB

10. who -r

run-level 3 Sep 24 15:37

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

Legend: LOAD -> Reflects whether the unit definition was properly loaded.
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
SUB -> The low-level unit activation state, values depend on unit type.
1 loaded units listed.

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron apparmor apport avahi-daemon bluetooth cloud-config cloud-final cloud-init cloud-init-local collectd console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gnome-remote-desktop gpu-manager grub-common grub-initrd-fallback kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssl-cert sssd switcheroo-control sysstat systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	brltty console-getty debug-shell ipmievdt nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	openipmi speech-dispatcher
indirect	saned@ spice-vdagentd sssd-autofs sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot uidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock saned sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/vmlinuz-6.14.0-29-generic
root=UUID=4c4111a1-2027-4689-8cc8-4d6d365932ca
ro
quiet
splash
vt.handoff=7

15. cpupower frequency-info

analyzing CPU 5:
current policy: frequency should be within 2.30 GHz and 4.32 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. sysctl

kernel.numa_balancing 1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

```
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04 LTS
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p5 ext4  701G  7.9G  657G   2% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Tyrone Systems
Product:     Tyrone Camarero MDA200A3N-212
Product Family: Camarero
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2N-212)
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Platform Notes (Continued)

24x Samsung M321R8GA0PB0-CWMCJ 64 GB 2 rank 5600

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: ES312AMS.205T5
BIOS Date: 09/02/2025
BIOS Revision: 5.35

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2N-212)
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Compiler Version Notes (Continued)

=====

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand

-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

-fprofile-instr-generate(pass 1)

-fprofile-instr-use(pass 2) -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7

-mllvm -unroll-threshold=50 -fremap-arrays

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-faggressive-loop-transform -fvector-transform

-fscalar-transform -lamdlibm -lflang -lamdalloc-ext -ldl

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand

-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM

-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Peak Optimization Flags (Continued)

502.gcc_r (continued):

-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl

523.xalancbmk_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)

(Tyrone Camarero SDA200A2N-212)

(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

531.deepsjeng_r: -m64 -std=c++14

-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext -ldl

541.leela_r: -m64 -std=c++14

-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

Fortran benchmarks:

-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -inline-recursion=4 -Wl, -mllvm -Wl, -lsr-in-nested-loop
-Wl, -mllvm -Wl, -enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2N-212)
(3.20 GHz, AMD EPYC 9255)

SPECrate®2017_int_base = 612

SPECrate®2017_int_peak = 617

CPU2017 License: 6042

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Sep-2025

Hardware Availability: Oct-2024

Software Availability: Aug-2025

Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Turin-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Turin-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-24 08:33:47-0400.

Report generated on 2025-12-03 14:21:21 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-02.