



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

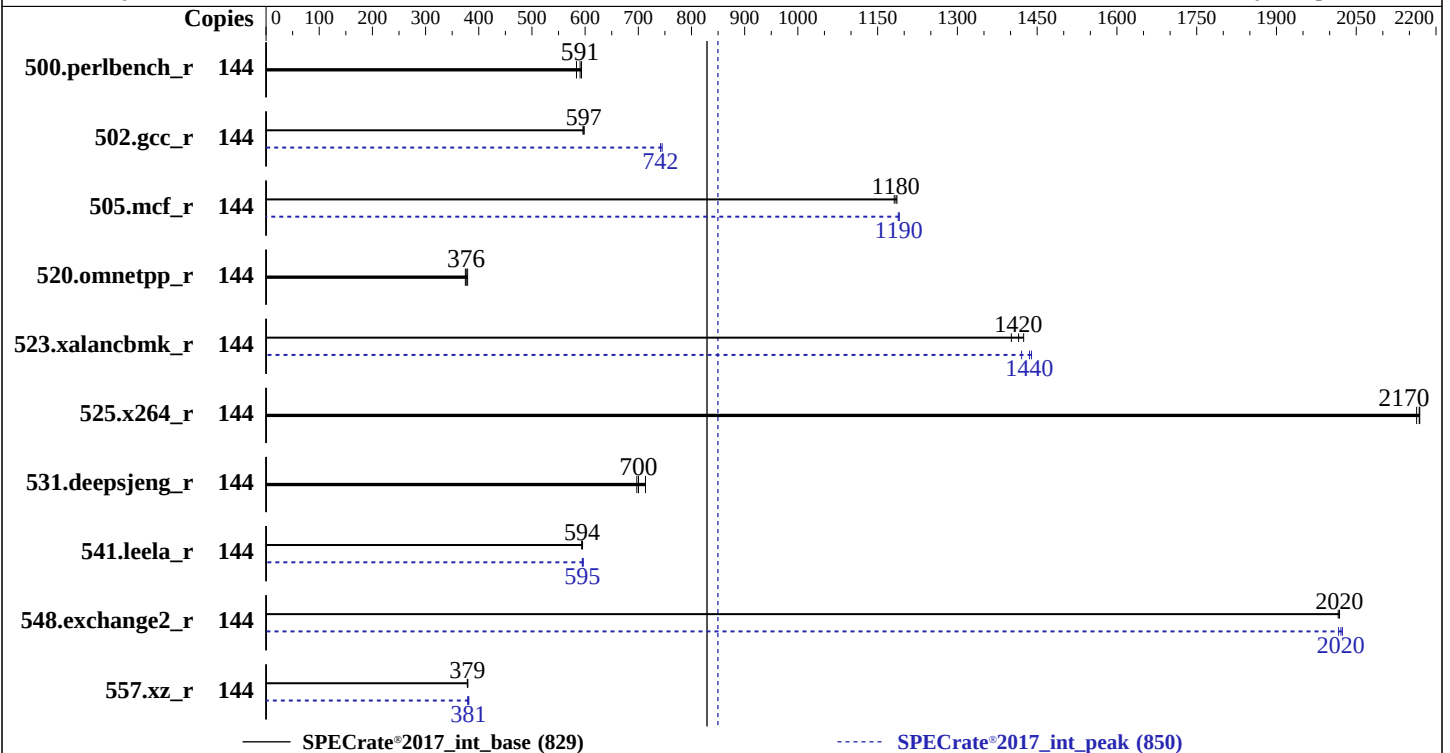

Hardware

CPU Name: AMD EPYC 9565
Max MHz: 4300
Nominal: 3150
Enabled: 72 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 1.92 TB 64G NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.51-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	388	591	386	593	393	584	144	388	591	386	593	393	584
502.gcc_r	144	342	596	341	597	341	598	144	275	742	274	745	275	742
505.mcf_r	144	197	1180	196	1180	196	1190	144	196	1190	195	1190	196	1190
520.omnetpp_r	144	504	375	498	379	502	376	144	504	375	498	379	502	376
523.xalancbmk_r	144	109	1400	107	1420	107	1420	144	107	1420	106	1440	106	1440
525.x264_r	144	116	2170	116	2170	117	2160	144	116	2170	116	2170	117	2160
531.deepsjeng_r	144	237	697	231	714	236	700	144	237	697	231	714	236	700
541.leela_r	144	401	594	402	594	401	595	144	400	597	401	595	401	595
548.exchange2_r	144	187	2020	187	2020	187	2020	144	186	2020	187	2020	187	2020
557.xz_r	144	411	379	410	379	411	378	144	408	381	410	379	408	381

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:always"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to High Performance Compute (HPC)

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

AMD Periodic Directory Rinse set to Periodic

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Aug 29 21:55:17 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
21:55:17 up 16 min, 3 users, load average: 0.15, 0.07, 0.04
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      :          :          19Mar25  ?xdm?   60.44s  0.02s  gdm-session-worker [pam/gdm-password]
root      seat0    login-        19Mar25  0.00s   0.00s  0.01s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root      :1       19Mar25  ?xdm?   60.44s  0.01s  /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root      pts/2    10.79.30.177: 21:54    13.00s  0.87s  0.10s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3092724
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3092724
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/1
-bash
screen -S cpu
SCREEN -S cpu
/bin/bash
python3 ./run_intrate.py
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.017/templogs/preenv.intrate.017.0.log --lognum 017.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9565 72-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002151
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs0
TLB size       : 192 4K pages
cpu cores      : 72
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61,64-69,72-77,80-85,88-93
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	144
On-line CPU(s) list:	0-143
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9565 72-Core Processor
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	72
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	102%
CPU max MHz:	3150.0000
CPU min MHz:	1500.0000
BogoMIPS:	6299.82
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap hv_inuse_wr_allowed srso_user_kernel_no
amd_lbr_pmc_freeze

L1d cache: 3.4 MiB (72 instances)

L1i cache: 2.3 MiB (72 instances)

L2 cache: 72 MiB (72 instances)

L3 cache: 384 MiB (12 instances)

NUMA node(s): 12

NUMA node0 CPU(s): 0-5,72-77

NUMA node1 CPU(s): 6-11,78-83

NUMA node2 CPU(s): 12-17,84-89

NUMA node3 CPU(s): 18-23,90-95

NUMA node4 CPU(s): 24-29,96-101

NUMA node5 CPU(s): 30-35,102-107

NUMA node6 CPU(s): 36-41,108-113

NUMA node7 CPU(s): 42-47,114-119

NUMA node8 CPU(s): 48-53,120-125

NUMA node9 CPU(s): 54-59,126-131

NUMA node10 CPU(s): 60-65,132-137

NUMA node11 CPU(s): 66-71,138-143

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	1M	72M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 12 nodes (0-11)

node 0 cpus: 0-5,72-77

node 0 size: 64120 MB

node 0 free: 63852 MB

node 1 cpus: 6-11,78-83

node 1 size: 64508 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
node 1 free: 64249 MB
node 2 cpus: 12-17,84-89
node 2 size: 64508 MB
node 2 free: 64258 MB
node 3 cpus: 18-23,90-95
node 3 size: 64508 MB
node 3 free: 64113 MB
node 4 cpus: 24-29,96-101
node 4 size: 64508 MB
node 4 free: 64085 MB
node 5 cpus: 30-35,102-107
node 5 size: 64508 MB
node 5 free: 63603 MB
node 6 cpus: 36-41,108-113
node 6 size: 64508 MB
node 6 free: 64206 MB
node 7 cpus: 42-47,114-119
node 7 size: 64470 MB
node 7 free: 63963 MB
node 8 cpus: 48-53,120-125
node 8 size: 64508 MB
node 8 free: 64229 MB
node 9 cpus: 54-59,126-131
node 9 size: 64508 MB
node 9 free: 63482 MB
node 10 cpus: 60-65,132-137
node 10 size: 64508 MB
node 10 free: 64045 MB
node 11 cpus: 66-71,138-143
node 11 size: 64040 MB
node 11 free: 63551 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11
0: 10 11 11 12 12 12 12 12 12 12 12 12
1: 11 10 11 12 12 12 12 12 12 12 12 12
2: 11 11 10 12 12 12 12 12 12 12 12 12
3: 12 12 12 10 11 11 12 12 12 12 12 12
4: 12 12 12 11 10 11 12 12 12 12 12 12
5: 12 12 12 11 11 10 12 12 12 12 12 12
6: 12 12 12 12 12 12 10 11 11 12 12 12
7: 12 12 12 12 12 12 11 10 11 12 12 12
8: 12 12 12 12 12 12 11 11 10 12 12 12
9: 12 12 12 12 12 12 12 12 12 10 11 11
10: 12 12 12 12 12 12 12 12 12 11 10 11
11: 12 12 12 12 12 12 12 12 12 11 11 10
```

```
-----
9. /proc/meminfo
MemTotal:      791766140 kB
```

```
-----
10. who -r
run-level 5 Mar 19 07:00
```

```
-----
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
    Default Target    Status
    graphical         running
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsd nvme-fc-boot-connections nvme-f-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis autofs autostart-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd clamd clamondacc collectd console-getty cups cups-browsed debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dnsmasq ebtables exchange-bmc-os-info fancontrol firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievad issue-add-ssh-keys kexec-load lm_sensors lunmask man-db-create memcached multipathd munge named nfs nfs-blkmap nfs-server nfs-server nmb ostree-remount ostree-state-overlay@ pcp-geolocate pmcd pmfind pmie pmie_farm pmlogger pmlogger_farm pmpoxy proftpd rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd-generate_opts smb snmpd snmptrapd speech-dispatcher sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ vsftpd wpa_supplicant@
indirect	pcscd systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=e9c24f90-4995-4bc8-80c5-b1e0dc1c50dd
splash=silent
resume=/dev/disk/by-uuid/f8d2aff2-72e3-490e-b7aa-5412864f7e46
mitigations=auto
quiet
security=apparmor
crashkernel=374M,high
crashkernel=72M,low
amd_pstate=active
```

14. cpupower frequency-info

```
analyzing CPU 49:
  current policy: frequency should be within 1.50 GHz and 3.15 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme4n1p5 xfs   953G   25G  928G   3% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     HPE ProLiant Compute DL345 Gen12
Product Family: ProLiant
Serial:      2M110725V1
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  9x Hynix HMG694AHBRA480N 64 GB 2 rank 6400, configured at 5200
  3x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     1.20
BIOS Date:        07/11/2025
BIOS Revision:    1.20
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

Firmware Revision: 1.16

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang

-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-Wl, -mllvm -Wl, -do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:

-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -inline-recursion=4 -Wl, -mllvm -Wl, -lsr-in-nested-loop
-Wl, -mllvm -Wl, -enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Peak Optimization Flags (Continued)

557.xz_r (continued):

```
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -flto -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc -ldl
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.15 GHz, AMD EPYC 9565)

SPECrate®2017_int_base = 829

SPECrate®2017_int_peak = 850

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.8.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.8.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-29 22:55:17-0400.

Report generated on 2025-12-03 14:22:27 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-02.