



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

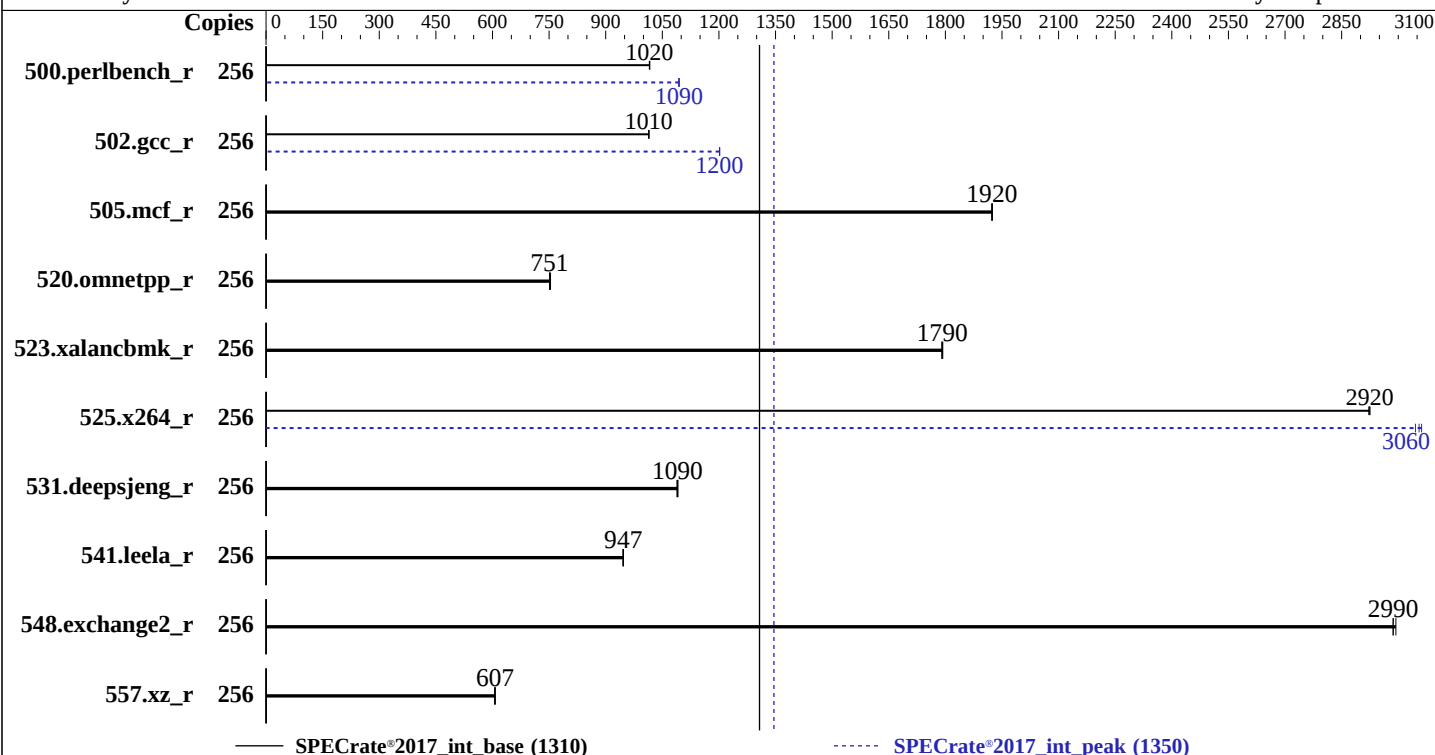

Hardware

CPU Name: Intel Xeon 6760P
Max MHz: 3800
Nominal: 2200
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 320 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 01.31.01.16 released Nov-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	<u>401</u>	<u>1020</u>	401	1020	401	1020	256	<u>372</u>	<u>1090</u>	373	1090	372	1090
502.gcc_r	256	357	1010	357	1010	<u>357</u>	<u>1010</u>	256	<u>302</u>	<u>1200</u>	302	1200	302	1200
505.mcf_r	256	215	1920	215	1920	<u>215</u>	<u>1920</u>	256	215	1920	215	1920	<u>215</u>	<u>1920</u>
520.omnetpp_r	256	<u>447</u>	<u>751</u>	447	751	446	754	256	<u>447</u>	<u>751</u>	447	751	446	754
523.xalancbmk_r	256	<u>151</u>	<u>1790</u>	151	1790	151	1790	256	<u>151</u>	<u>1790</u>	151	1790	151	1790
525.x264_r	256	153	2920	<u>153</u>	<u>2920</u>	153	2920	256	146	3060	147	3050	<u>147</u>	<u>3060</u>
531.deepsjeng_r	256	<u>269</u>	<u>1090</u>	269	1090	269	1090	256	<u>269</u>	<u>1090</u>	269	1090	269	1090
541.leela_r	256	448	947	<u>448</u>	<u>947</u>	448	945	256	448	947	<u>448</u>	<u>947</u>	448	945
548.exchange2_r	256	<u>225</u>	<u>2990</u>	225	2990	224	2990	256	<u>225</u>	<u>2990</u>	225	2990	224	2990
557.xz_r	256	<u>455</u>	<u>607</u>	455	607	457	606	256	<u>455</u>	<u>607</u>	455	607	457	606

SPECrate®2017_int_base = 1310

SPECrate®2017_int_peak = 1350

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/lib/ia32:/home/Uniautos/cpu2017/je5.0.1-32"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
LLC Prefetch Set to Enabled
DCU Streamer Prefetcher Set to Disabled
SNC Set to Enabled
Latency Optimized Mode Set to Enabled
Page Policy set to Closed

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Nov 18 21:12:49 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
21:12:49 up 1 min, 1 user, load average: 0.26, 0.11, 0.04
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 21:12 9.00s 1.25s 0.10s sh run_rate.sh

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2059923
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2059923
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
sh run_rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6760P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x10003c2
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 64
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0:  core ids 0-31,64-95
physical id 1:  core ids 0-31,64-95
physical id 0:  apicids 0-63,128-191
physical id 1:  apicids 256-319,384-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: May-2025
Software Availability: Apr-2024

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6760P
BIOS Model name:       Intel(R) Xeon(R) 6760P
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    64
Socket(s):              2
Stepping:               1
BogoMIPS:              4400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq
                        dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                        sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                        rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority
                        ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                        cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                        intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                        amx_int8 flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             8 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-31,128-159
NUMA node1 CPU(s):     32-63,160-191
NUMA node2 CPU(s):     64-95,192-223
NUMA node3 CPU(s):     96-127,224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	64K	8M	16	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	16	Unified	3	327680	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 128056 MB
node 0 free: 127375 MB
node 1 cpus: 32-63,160-191
node 1 size: 129007 MB
node 1 free: 128491 MB
node 2 cpus: 64-95,192-223
node 2 size: 129007 MB
node 2 free: 128374 MB
node 3 cpus: 96-127,224-255
node 3 size: 128950 MB
node 3 free: 128124 MB
node distances:
node    0    1    2    3
 0:   10   12   21   21
 1:   12   10   21   21
 2:   21   21   10   12
 3:   21   21   12   10
```

9. /proc/meminfo

MemTotal: 527383828 kB

10. who -r

run-level 3 Nov 18 21:12

11. Systemd service manager version: systemd 252 (252-32.el9_4)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Platform Notes (Continued)

enabled-runtime
disabled
indirect

selinux-autorelabel-mark sep5 sshd sssd systemd-boot-update systemd-network-generator
udisks2 upower
systemd-remount-fs
blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot console-getty cpupower debug-shell dnf-system-upgrade
kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

15. cpupower frequency-info
analyzing CPU 121:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Platform Notes (Continued)

alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.4 (Plow)
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)

20. Disk information
SPEC is set to: /home/Uniautos/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 19G 800G 3% /home

21. /sys/devices/virtual/dmi/id
Product: 2288 V8
Product Family: Birch Stream

22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R4GA3EB2-CCPWF 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: INSYDE Corp.
BIOS Version: 01.31.01.16
BIOS Date: 11/13/2025
BIOS Revision: 1.16

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Compiler Version Notes (Continued)

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Peak Portability Flags (Continued)

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallocc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallocc

557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1310

FusionServer 2288 V8 (Intel Xeon 6760P)

SPECrate®2017_int_peak = 1350

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: May-2025

Software Availability: Apr-2024

Peak Optimization Flags (Continued)

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-18 08:12:48-0500.

Report generated on 2025-12-16 21:32:57 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-16.