



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

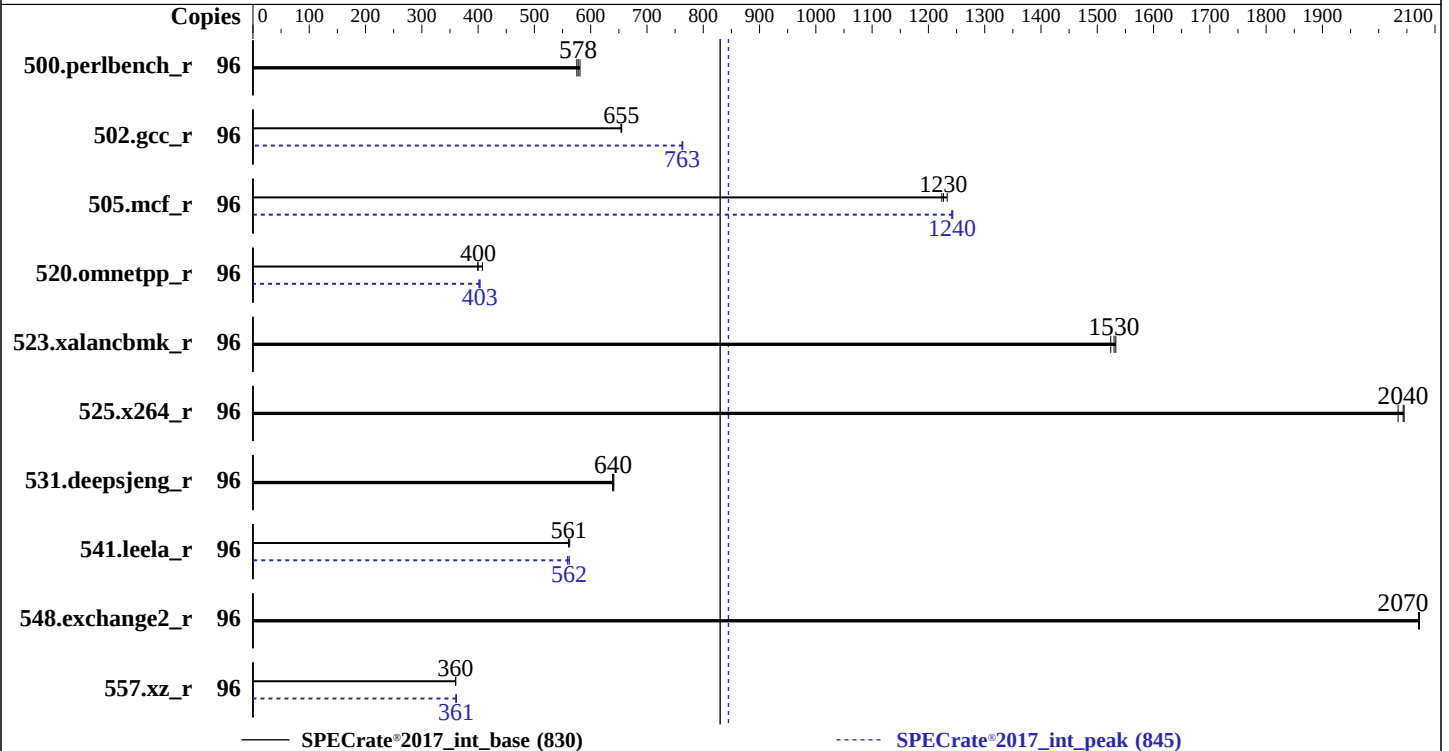

Hardware

CPU Name: AMD EPYC 9275F
Max MHz: 4800
Nominal: 4100
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 3 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 3.84 TB PCIe NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 00.13.03.12 released Nov-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	<u>265</u>	<u>578</u>	266	575	263	581	96	<u>265</u>	<u>578</u>	266	575	263	581
502.gcc_r	96	<u>208</u>	<u>655</u>	208	654	208	655	96	178	764	<u>178</u>	<u>763</u>	178	763
505.mcf_r	96	127	1220	126	1230	<u>126</u>	<u>1230</u>	96	125	1240	125	1240	<u>125</u>	<u>1240</u>
520.omnetpp_r	96	315	399	<u>315</u>	<u>400</u>	309	408	96	312	403	314	401	<u>313</u>	<u>403</u>
523.xalancbmk_r	96	66.5	1520	66.1	1530	<u>66.3</u>	<u>1530</u>	96	66.5	1520	66.1	1530	<u>66.3</u>	<u>1530</u>
525.x264_r	96	82.6	2030	82.2	2050	<u>82.3</u>	<u>2040</u>	96	82.6	2030	82.2	2050	<u>82.3</u>	<u>2040</u>
531.deepsjeng_r	96	172	641	<u>172</u>	<u>640</u>	172	639	96	172	641	<u>172</u>	<u>640</u>	172	639
541.leela_r	96	284	561	283	563	<u>283</u>	<u>561</u>	96	285	559	283	562	<u>283</u>	<u>562</u>
548.exchange2_r	96	<u>121</u>	<u>2070</u>	121	2070	121	2070	96	<u>121</u>	<u>2070</u>	121	2070	121	2070
557.xz_r	96	<u>288</u>	<u>360</u>	288	360	288	360	96	288	360	287	362	<u>287</u>	<u>361</u>

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
NUMA Nodes Per Socket = NPS4
APBDIS = 1

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Nov 17 13:42:08 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. `uname -a`
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. `w`
13:42:08 up 2:11, 3 users, load average: 0.40, 14.42, 50.67
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 11:46 15.00s 1.22s 0.14s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
root pts/0 192.168.111.189 11:59 1:06m 0.19s 0.19s -bash

3. Username
From environment variable \$USER: root

4. `ulimit -a`
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6189044
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6189044
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. `sysinfo process ancestry`
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
sh test_rate.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. `/proc/cpuinfo`
model name : AMD EPYC 9275F 24-Core Processor
vendor_id : AuthenticAMD
cpu family : 26

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

model : 2
stepping : 1
microcode : 0xb002151
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size : 192 4K pages
cpu cores : 24
siblings : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 1: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 1: apicids 128-133,144-149,160-165,176-181,192-197,208-213,224-229,240-245

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9275F 24-Core Processor
BIOS Model name:	AMD EPYC 9275F 24-Core Processor Unknown CPU @ 4.1GHz
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	24
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	85%
CPU max MHz:	4816.6992
CPU min MHz:	1500.0000
BogoMIPS:	8200.24
Flags:	fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat pse36_clflush_mmx_fxsr_sse_sse2_ht_syscall_nx_mmxext_fxsr_opt_pdpe1gb rdtscp_lm_constant_tsc_rep_good_amd_lbr_v2_nopl_nonstop_tsc_cpuid extd_apicid_aperfmpperf_rapl_pni_pclmulqdq_monitor_ssse3_fma_cx16_pcid sse4_1_sse4_2_x2apic_movbe_popcnt_aes_xsave_avx_f16c_rdrand_lahf_lm cmp_legacy_svm_extapic_cr8_legacy_abm_sse4a_misalignsse_3dnowprefetch osvw_ibs_skinit_wdt_tce_topoext_perfctr_core_perfctr_nb_bpext perfctr_llc_mwaitx_cpb_cat_l3_cdp_l3_hw_pstate_ssbd_mba_perfmon_v2 ibrs_ibpb_stibp_ibrs_enhanced_vmmcall_fsgsbase_tsc_adjust_bmi1_avx2 smep_bmi2_erms_invpcid_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smap avx512ifma_clflushopt_clwb_avx512cd_sha_ni_avx512bw_avx512vl_xsaveopt xsavec_xgetbv1_xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total cqm_mbm_local_user_shstk_avx_vnni_avx512_bf16_clzero_irperf xsaveerptr_rdprr_wbnoinvd_amd_ppin_cppc_arat_npt_lbrv_svm_lock nrip_save_tsc_scale_vmc_b_clean_flushbyasid_decodeassists_pausefilter pfthreshold_avic_v_vmsave_vmload_vgif_x2avic_v_spec_ctrl_vnmi avx512vbmi_umip_pku_ospke_avx512_vbmi2_gfni_vaes_vpclmulqdq avx512_vnni_avx512_bitalg_avx512_vpopcntdq_la57_rdpid_bus_lock_detect

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap
AMD-V
Virtualization:
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 2.3M 12 Data 1 64 1 64
L1i 32K 1.5M 8 Instruction 1 64 1 64
L2 1M 48M 16 Unified 2 1024 1 64
L3 32M 512M 16 Unified 3 32768 1 64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-5,48-53
node 0 size: 193042 MB
node 0 free: 192070 MB
node 1 cpus: 6-11,54-59
node 1 size: 193494 MB
node 1 free: 192636 MB
node 2 cpus: 12-17,60-65
node 2 size: 193532 MB
node 2 free: 192617 MB
node 3 cpus: 18-23,66-71
node 3 size: 193532 MB
node 3 free: 191913 MB
node 4 cpus: 24-29,72-77
node 4 size: 193532 MB
node 4 free: 192669 MB
node 5 cpus: 30-35,78-83
node 5 size: 193532 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Platform Notes (Continued)

```
node 5 free: 192453 MB
node 6 cpus: 36-41,84-89
node 6 size: 193532 MB
node 6 free: 192685 MB
node 7 cpus: 42-47,90-95
node 7 size: 193087 MB
node 7 free: 192217 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10
```

```
9. /proc/meminfo
MemTotal:      1584422092 kB
```

```
10. who -r
run-level 3 Nov 17 11:31
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target   Status
multi-user       running
```

```
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
            irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor
            nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog
            smartd sshd systemd-network-generator systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
            wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled    autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
            chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
            gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
            multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
            snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-sysext
            systemd-time-wait-sync systemd-timesyncd vncserver@
indirect    systemd-userdbd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=2fcef20-8ab5-4579-8788-0c4fc77d421a
splash=silent
resume=/dev/disk/by-uuid/eba26d4c-ce83-4c31-a0a1-d12b7ece39ae
mitigations=auto
quiet
security=apparmor
crashkernel=364M,high
crashkernel=72M,low
nohz_full=1-63
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 44:

current policy: frequency should be within 1.50 GHz and 4.10 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	2.8T	59G	2.7T	3%	/home

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Product: 2258H V8
Product Family: Turin

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMC94AHBRA481N 64 GB 2 rank 6400
12x SK Hynix HMC94AHBRA487N 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 00.13.03.12
BIOS Date: 11/10/2025
BIOS Revision: 3.12

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 548.exchange2_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2025
Hardware Availability: Sep-2025
Software Availability: Oct-2024

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext  
-ldl
```

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2258H V8
AMD EPYC 9275F

SPECrate®2017_int_base = 830

SPECrate®2017_int_peak = 845

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Nov-2025

Hardware Availability: Sep-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V2.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V2.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-17 13:42:07-0500.

Report generated on 2025-12-16 21:33:29 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-16.