



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573


Test Date: Nov-2025

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2025

Tested by: Dell Inc.

Software Availability: Sep-2025

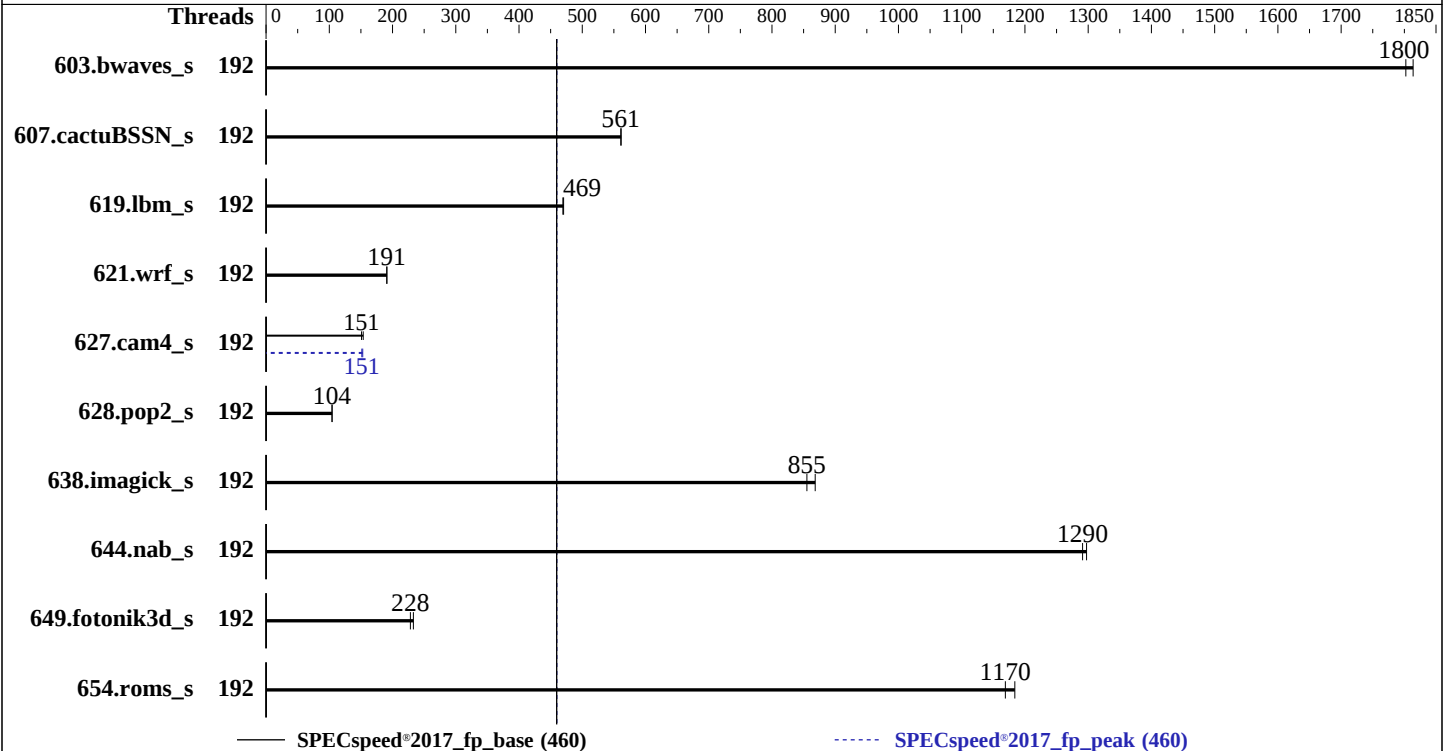

Hardware

CPU Name: Intel Xeon 6972P
Max MHz: 3900
Nominal: 2400
Enabled: 192 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 480 MB I+D on chip per chip
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 190 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 16.0
6.12.0-160000.5-default
Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2025.2 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 1.1.5 released Oct-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2025
Hardware Availability: Dec-2025
Software Availability: Sep-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	32.5	1810	<u>32.7</u>	<u>1800</u>			192	32.5	1810	<u>32.7</u>	<u>1800</u>		
607.cactuBSSN_s	192	<u>29.7</u>	<u>561</u>	29.7	562			192	<u>29.7</u>	<u>561</u>	29.7	562		
619.lbm_s	192	<u>11.2</u>	<u>469</u>	11.1	470			192	<u>11.2</u>	<u>469</u>	11.1	470		
621.wrf_s	192	69.2	191	<u>69.3</u>	<u>191</u>			192	69.2	191	<u>69.3</u>	<u>191</u>		
627.cam4_s	192	<u>58.7</u>	<u>151</u>	57.7	154			192	<u>58.5</u>	<u>151</u>	58.0	153		
628.pop2_s	192	<u>114</u>	<u>104</u>	114	104			192	<u>114</u>	<u>104</u>	114	104		
638.imagick_s	192	<u>16.9</u>	<u>855</u>	16.6	868			192	<u>16.9</u>	<u>855</u>	16.6	868		
644.nab_s	192	13.5	1300	<u>13.5</u>	<u>1290</u>			192	13.5	1300	<u>13.5</u>	<u>1290</u>		
649.fotonik3d_s	192	<u>39.9</u>	<u>228</u>	39.1	233			192	<u>39.9</u>	<u>228</u>	39.1	233		
654.roms_s	192	<u>13.5</u>	<u>1170</u>	13.3	1180			192	<u>13.5</u>	<u>1170</u>	13.3	1180		

SPECspeed®2017_fp_base = 460

SPECspeed®2017_fp_peak = 460

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 190 GB ramdisk created with the cmd: "mount -t tmpfs -o size=190G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Sub NUMA Cluster : Enabled

LLC Prefetch : Enabled

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Platform Notes (Continued)

System Profile : Custom
CPU Power Management : Maximum Performance
C1E : Disabled
C-States : Autonomous
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on R7703AP-R770AP Wed Nov 12 12:26:57 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

1. uname -a
Linux R7703AP-R770AP 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd)
x86_64 x86_64 x86_64 GNU/Linux

2. w
12:26:58 up 9 min, 1 user, load average: 0.23, 1.21, 1.15
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 12:24 26.00s 0.83s ? /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T17 --output_format html,pdf,txt

3. Username
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Platform Notes (Continued)

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3092893
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3092893
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=47
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T17 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T17 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=192 --tune base,peak -o all --define
smt-on --define drop_caches --iterations 2 --define DL-VERS=6.4_T17 --output_format html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=192 --tune base,peak --output_format all
--define smt-on --define drop_caches --iterations 2 --define DL-VERS=6.4_T17 --output_format html,pdf,txt
--nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6972P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
cpu cores      : 96
siblings       : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-31,64-95,128-159
physical id 1: core ids 0-31,64-95,128-159
physical id 0: apicids 0-63,128-191,256-319
physical id 1: apicids 512-575,640-703,768-831
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECSpeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.41.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 384
On-line CPU(s) list:    0-383
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) 6972P
CPU family:             6
Model:                  173
Thread(s) per core:     2
Core(s) per socket:     96
Socket(s):              2
Stepping:               1
BogoMIPS:               4800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                        cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                        bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni
                        avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnni avx512vbmi
                        umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                        amx_tile amx_int8 flush_l1d arch_capabilities

Virtualization:         VT-x
L1d cache:              9 MiB (192 instances)
L1i cache:              12 MiB (192 instances)
L2 cache:               384 MiB (192 instances)
L3 cache:               960 MiB (2 instances)
NUMA node(s):           6
NUMA node0 CPU(s):      0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46
                        , 48, 50, 52, 54, 56, 58, 60, 62, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 2
                        12, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244
                        , 246, 248, 250, 252, 254
NUMA node1 CPU(s):      64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104,
                        106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 256, 258, 260, 262, 264, 26
                        6, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298,
                        300, 302, 304, 306, 308, 310, 312, 314, 316, 318
NUMA node2 CPU(s):      128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 16
                        0, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 320,
                        322, 324, 326, 328, 330, 332, 334, 336, 338, 340, 342, 344, 346, 348, 350, 352, 35
                        4, 356, 358, 360, 362, 364, 366, 368, 370, 372, 374, 376, 378, 380, 382
NUMA node3 CPU(s):      1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47
                        , 49, 51, 53, 55, 57, 59, 61, 63, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Platform Notes (Continued)

NUMA node4 CPU(s): 13, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255
65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255

NUMA node5 CPU(s): 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255

Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	64K	12M	16	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	480M	960M	16	Unified	3	491520	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 6 nodes (0-5)

node 0 cpus:

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254

node 0 size: 128568 MB

node 0 free: 113294 MB

node 1 cpus:

64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254

node 1 size: 128959 MB

node 1 free: 128105 MB

node 2 cpus:

128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254

node 2 size: 129000 MB

node 2 free: 128707 MB

node 3 cpus:

1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Platform Notes (Continued)

201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255

node 3 size: 129000 MB

node 3 free: 128728 MB

node 4 cpus:

65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127, 129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255

node 4 size: 129000 MB

node 4 free: 128716 MB

node 5 cpus:

129, 131, 133, 135, 137, 139, 141, 143, 145, 147, 149, 151, 153, 155, 157, 159, 161, 163, 165, 167, 169, 171, 173, 175, 177, 179, 181, 183, 185, 187, 189, 191, 193, 195, 197, 199, 201, 203, 205, 207, 209, 211, 213, 215, 217, 219, 221, 223, 225, 227, 229, 231, 233, 235, 237, 239, 241, 243, 245, 247, 249, 251, 253, 255

node 5 size: 128922 MB

node 5 free: 128659 MB

node distances:

node	0	1	2	3	4	5
0:	10	15	17	21	28	26
1:	15	10	15	23	26	23
2:	17	15	10	26	23	21
3:	21	28	26	10	15	17
4:	23	26	23	15	10	15
5:	26	23	21	17	15	10

9. /proc/meminfo

MemTotal: 792013884 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)

Default Target	Status
multi-user	running

11. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd bluetooth chronyd dbus-broker firewalld gdm getty@ irqbalance issue-generator kbdsettings klogd lvm2-monitor nvme-fc-boot-connections nvme-fc-autoconnect rollback rsyslog smartd soft-reboot-cleaner sshd systemd-pstore wpa_supplicant wtmpd update-boot
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon blk-availability bluetooth-mesh boot-sysctl ca-certificates ca-certificates-setup chrony-wait console-getty cups debug-shell dnsmasq gnome-remote-desktop gnome-remote-desktop-configuration gpm grub2-once hwloc-dump-hwdata issue-add-ssh-keys kea-ctrl-agent kea-dhcp-ddns kea-dhcp4 kea-dhcp6 kernel-sysctl kexec-load lastlog2-import lunmask lvm-devices-import man-db-create multipathd named nftables nis-domainname pkcs11-eventmgr rpmconfigcheck rsyncd rtkit-daemon serial-getty@ setup-systemd-proxy-env smartd generate_opts snmpd snmptrapd speech-dispatcher systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2 upower wpa_supplicant@
indirect	pcscd systemd-userdbd

12. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
root=UUID=0b344ecf-2e5a-4bf3-b6c0-aecf8a6f67c0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Platform Notes (Continued)

```
mitigations=auto
quiet
security=selinux
selinux=1
```

```
-----
13. cpupower frequency-info
    analyzing CPU 0:
        Unable to determine current policy
        boost state support:
            Supported: yes
            Active: yes
```

```
-----
14. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      2
    vm.compaction_proactiveness    20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio      10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs      3000
    vm.dirty_ratio                 20
    vm.dirty_writeback_centisecs   500
    vm.dirtytime_expire_seconds    43200
    vm.extfrag_threshold           500
    vm.min_unmapped_ratio          1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy      0
    vm.nr_overcommit_hugepages    0
    vm.swappiness                  60
    vm.watermark_boost_factor      15000
    vm.watermark_scale_factor      10
    vm.zone_reclaim_mode           0
```

```
-----
15. /sys/kernel/mm/transparent_hugepage
    defrag          always defer defer+madvice [madvice] never
    enabled         [always] madvice never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
```

```
-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs   10000
```

```
-----
17. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 16.0
```

```
-----
18. Disk information
    SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	190G	5.8G	185G	4%	/mnt/ramdisk

19. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R770AP
Product Family: PowerEdge
Serial: R7703AP

20. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
1x 00AD042300AD HMC888AHBRA471N 32 GB 2 rank 6400
18x 00AD063200AD HMC888AHBRA286N 32 GB 2 rank 6400
1x 00AD063200AD HMC888AHBRA477N 32 GB 2 rank 6400
4x 00AD063200AD HMC888AHBRA478N 32 GB 2 rank 6400

21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.1.5
BIOS Date: 10/22/2025
BIOS Revision: 1.1

Compiler Version Notes

=====

C	619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
---	---

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====

C++, C, Fortran	607.cactuBSSN_s(base, peak)
-----------------	-----------------------------

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====

Fortran	603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
---------	---

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Compiler Version Notes (Continued)

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605

Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605

Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xgraniterapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flt0 -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.18.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 460

PowerEdge R770AP (Intel Xeon 6972P)

SPECspeed®2017_fp_peak = 460

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2025

Hardware Availability: Dec-2025

Software Availability: Sep-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-12 13:26:57-0500.
Report generated on 2025-12-16 21:35:55 by CPU2017 PDF formatter v6716.
Originally published on 2025-12-16.