



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

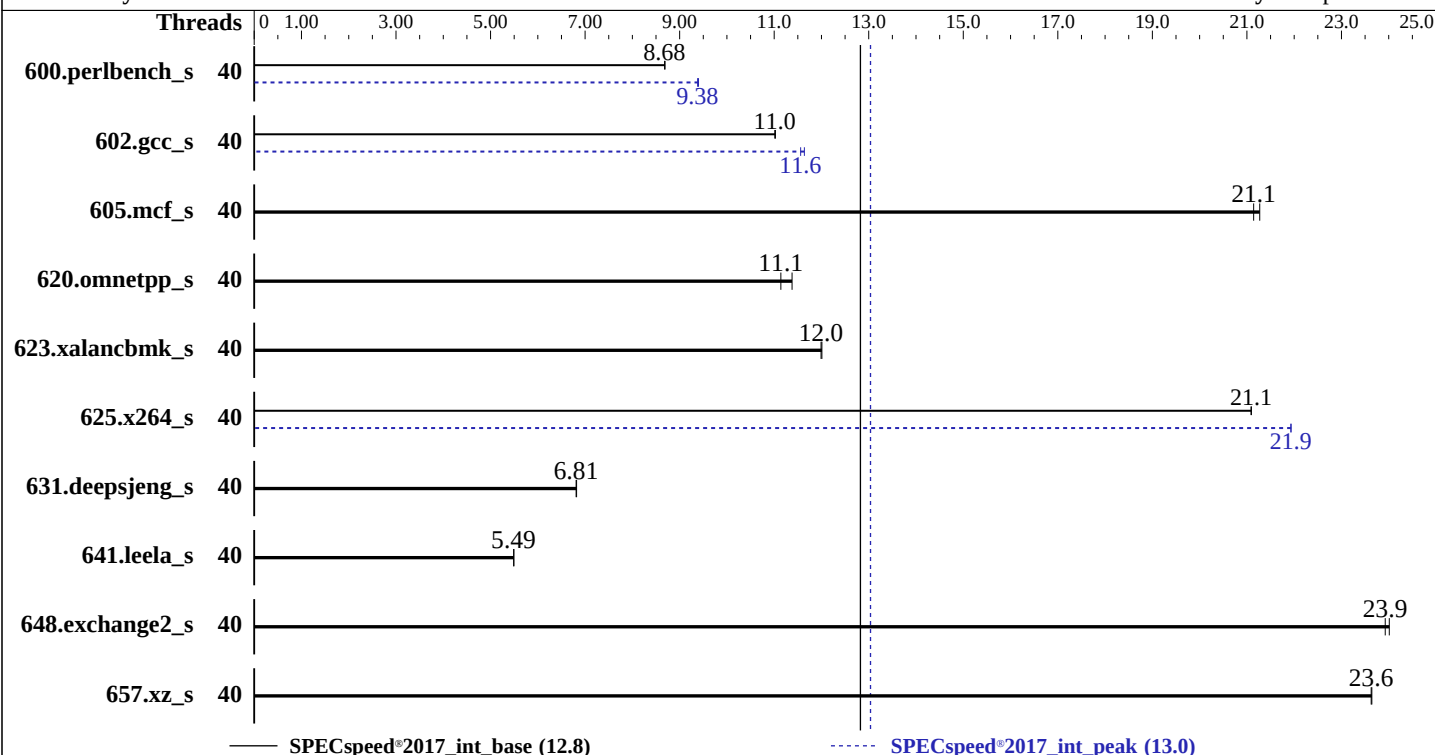

Hardware

CPU Name: Intel Xeon 6716P-B
Max MHz: 3500
Nominal: 2500
Enabled: 40 cores, 1 chip
Orderable: 1 chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 160 MB I+D on chip per chip
Other: None
Memory: 256 GB (4 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 50 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 10.0 (Coughlan)
6.12.0-55.29.1.el10_0.x86_64
Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2025.2 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 1.0.4 released Nov-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	40	204	8.68	204	8.69			40	189	9.38	189	9.40		
602.gcc_s	40	361	11.0	362	11.0			40	344	11.6	342	11.6		
605.mcf_s	40	222	21.3	223	21.1			40	222	21.3	223	21.1		
620.omnetpp_s	40	146	11.1	143	11.4			40	146	11.1	143	11.4		
623.xalancbmk_s	40	118	12.0	118	12.0			40	118	12.0	118	12.0		
625.x264_s	40	83.7	21.1	83.6	21.1			40	80.4	21.9	80.4	21.9		
631.deepsjeng_s	40	210	6.82	210	6.81			40	210	6.82	210	6.81		
641.leela_s	40	311	5.49	311	5.49			40	311	5.49	311	5.49		
648.exchange2_s	40	123	23.9	122	24.0			40	123	23.9	122	24.0		
657.xz_s	40	261	23.6	262	23.6			40	261	23.6	262	23.6		

SPECspeed®2017_int_base = 12.8

SPECspeed®2017_int_peak = 13.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 50 GB ramdisk created with the cmd: "mount -t tmpfs -o size=50G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Logical Processor : Disabled

LLC Prefetch : Enabled

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

System Profile : Custom
Latency Optimized Mode : Enabled
CPU Interconnect Bus -
Link Power Management : Disabled
Memory Paging Policy : Closed Paging

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLXR871-XR8720t Mon Dec 15 06:34:05 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux SLXR871-XR8720t 6.12.0-55.29.1.el10_0.x86_64 #1 SMP PREEMPT_DYNAMIC Mon Aug 18 05:37:24 EDT 2025
x86_64 GNU/Linux

2. w
06:34:05 up 1 min, 0 user, load average: 0.46, 0.14, 0.05
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 1026829
max locked memory	(kbytes, -l) 8192
max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 1026829
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=47 rhgb
/usr/sbin/crond -n
/usr/sbin/CROND -n
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T19 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.4_T19 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=40 --tune base,peak -o all --define
intspeedaffinity --define drop_caches --iterations 2 --define DL-VERS=6.4_T19 --output_format html,pdf,txt
intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=40 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --define DL-VERS=6.4_T19 --output_format
html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed intspeak --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.001/temlogs/preenv.intspeak.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
-----
```

```
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) 6716P-B
vendor_id      : GenuineIntel
cpu family     : 6
model          : 174
stepping       : 1
microcode      : 0x10002b3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps bhi
cpu cores      : 40
siblings       : 40
1 physical ids (chips)
40 processors (hardware threads)
physical id 0: core ids 0-39
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	40
On-line CPU(s) list:	0-39
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel
Model name:	INTEL(R) XEON(R) 6716P-B
BIOS Model name:	INTEL(R) XEON(R) 6716P-B CPU @ 2.5GHz
BIOS CPU family:	179
CPU family:	6
Model:	174
Thread(s) per core:	1
Core(s) per socket:	40
Socket(s):	1
Stepping:	1
BogoMIPS:	5000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	1.9 MiB (40 instances)
L1i cache:	2.5 MiB (40 instances)
L2 cache:	80 MiB (40 instances)
L3 cache:	160 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-39
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.9M	12	Data	1	64	1	64
L1i	64K	2.5M	16	Instruction	1	64	1	64
L2	2M	80M	16	Unified	2	2048	1	64
L3	160M	160M	16	Unified	3	163840	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0-39
node 0 size: 256923 MB
node 0 free: 241738 MB
node distances:
node 0
0: 10

9. /proc/meminfo

MemTotal: 263090144 kB

10. who -r

run-level 3 Dec 15 06:32

11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd audit-rules auditd avahi-daemon bluetooth chronyd crond cups dbus-broker fips-crypto-policy-overlay firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragegmt lvm2-monitor mcelog mdmonitor multipathd nvmeofc-boot-connections qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-confext systemd-network-generator systemd-pstore systemd-sysext tuned tuned-ppd udisks2 upower vgauthd vmttoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq gnome-headless-session@ gnome-remote-desktop gnome-remote-desktop-configuration hypervfs-copyd iscsi-init iscsid iscsiuio kpatch kvm_stat ledmon low-memory-monitor lvm-devices-import man-db-restart-cache-update microcode netavark-dhcp-proxy netavark-firewalld-reload nftables nis-domainname nvmmf-autoconnect podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rhsm rhsm-facts rpmdm-migrate rpmdm-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd ssh-host-keys-migration sshd-keygen@ systemd-boot-check-no-failures systemd-boot-update

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

indirect
systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config
systemd-PCRlock-machine-id systemd-PCRlock-make-policy
systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy
systemd-udev-load-credentials wpa_supplicant wsd yggdrasil yggdrasil@
iscsi pcscd spice-vdagentd sshd@ sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
sssd-sudo systemd-sysupdate systemd-sysupdate-reboot systemd-userdbd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-6.12.0-55.29.1.el10_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=2G-64G:256M,64G-:512M
resume=UUID=cbb685cf-16aa-4a09-bfd3-26b1fcd0cf61
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

14. cpupower frequency-info
analyzing CPU 36:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
No current active profile.

16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 10.0 (Coughlan)
redhat-release Red Hat Enterprise Linux release 10.0 (Coughlan)
system-release Red Hat Enterprise Linux release 10.0 (Coughlan)
```

20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	50G	5.8G	45G	12%	/mnt/ramdisk

21. /sys/devices/virtual/dmi/id

```
Vendor: Dell Inc.
Product: PowerEdge XR8720t
Product Family: PowerEdge
Serial: SLXR871
```

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x 00AD063200AD HMC94AHBRA487N 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: Dell Inc.
BIOS Version: 1.0.4
BIOS Date: 11/13/2025
BIOS Revision: 1.0
```

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
      | 657.xz_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Compiler Version Notes (Continued)

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Base Optimization Flags (Continued)

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-fno-strict-aliasing -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Peak Optimization Flags (Continued)

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.8

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECspeed®2017_int_peak = 13.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-15 07:34:04-0500.

Report generated on 2026-01-14 13:46:30 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-13.