



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

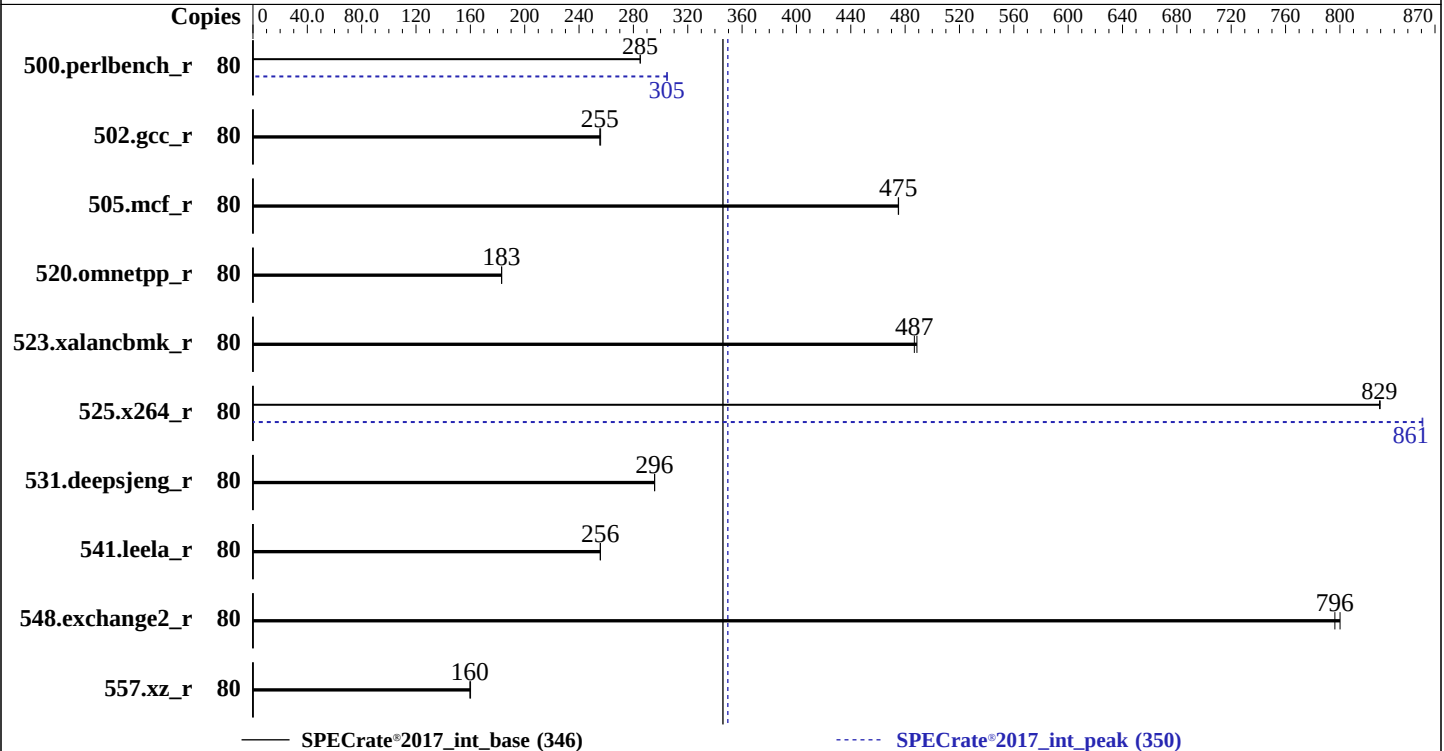

Hardware

CPU Name: Intel Xeon 6716P-B
Max MHz: 3500
Nominal: 2500
Enabled: 40 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 160 MB I+D on chip per chip
Other: None
Memory: 256 GB (4 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 70 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 10.0 (Coughlan)
6.12.0-55.29.1.el10_0.x86_64
Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2025.2 of Intel Fortran Compiler
for Linux;
Parallel: No
Firmware: Version 1.0.4 released Nov-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	447	285	447	285			80	418	305	418	305		
502.gcc_r	80	443	256	444	255			80	443	256	444	255		
505.mcf_r	80	272	475	272	475			80	272	475	272	475		
520.omnetpp_r	80	573	183	573	183			80	573	183	573	183		
523.xalancbmk_r	80	173	489	174	487			80	173	489	174	487		
525.x264_r	80	169	830	169	829			80	163	861	163	861		
531.deepsjeng_r	80	310	296	310	296			80	310	296	310	296		
541.leela_r	80	518	256	518	256			80	518	256	518	256		
548.exchange2_r	80	262	800	263	796			80	262	800	263	796		
557.xz_r	80	539	160	541	160			80	539	160	541	160		

SPECrate®2017_int_base = 346

SPECrate®2017_int_peak = 350

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/ia32:/mnt/ram

disk/cpu2017-1.1.9-ic2025.2/je5.0.1-32"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes

BIOS Settings:

AMP Prefetch : Enabled

System Profile : Custom

Latency Optimized Mode : Enabled

Memory Paging Policy : Closed Paging

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on SLXR871-XR8720t Sat Dec 13 14:04:24 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux SLXR871-XR8720t 6.12.0-55.29.1.el10_0.x86_64 #1 SMP PREEMPT_DYNAMIC Mon Aug 18 05:37:24 EDT 2025
x86_64 GNU/Linux
```

```
2. w
14:04:24 up 1 min,  1 user,  load average: 0.57, 0.20, 0.07
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root                14:04   1:27   0.00s  0.26s /usr/lib/systemd/systemd --user
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

core file size	(blocks, -c) unlimited
data seg size	(kbytes, -d) unlimited
scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 1026786
max locked memory	(kbytes, -l) 8192
max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 1026786
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=47 rhgb
/usr/sbin/crond -n
/usr/sbin/CROND -n
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T19 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.4_T19 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=80 -c
ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=40 --define physicalfirst
--define no-numa --define intrate-peak --tune base,peak -o all --define drop_caches --iterations 2
--define DL-VERS=6.4_T19 --output_format html,pdf,txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=80 --configfile
ic2025.2-linux64-graniterapids-rate-20250605.cfg --define smt-on --define cores=40 --define physicalfirst
--define no-numa --define intrate-peak --tune base,peak --output_format all --define drop_caches
--iterations 2 --define DL-VERS=6.4_T19 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) 6716P-B
vendor_id       : GenuineIntel
cpu family      : 6
model           : 174
stepping        : 1
microcode       : 0x10002b3
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 40
siblings        : 80
1 physical ids (chips)
80 processors (hardware threads)
physical id 0:  core ids 0-39
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

physical id 0: apicids 0-79

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.2:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      80
On-line CPU(s) list:         0-79
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel
Model name:                  INTEL(R) XEON(R) 6716P-B
BIOS Model name:             INTEL(R) XEON(R) 6716P-B  CPU @ 2.5GHz
BIOS CPU family:             179
CPU family:                  6
Model:                       174
Thread(s) per core:          2
Core(s) per socket:          40
Socket(s):                   1
Stepping:                    1
BogoMIPS:                    5000.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                             rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                             intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                             xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                             gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                             rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   1.9 MiB (40 instances)
L1i cache:                   2.5 MiB (40 instances)
L2 cache:                    80 MiB (40 instances)
L3 cache:                    160 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):          0-79
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:      Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-IBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.9M	12	Data	1	64	1	64
L1i	64K	2.5M	16	Instruction	1	64	1	64
L2	2M	80M	16	Unified	2	2048	1	64
L3	160M	160M	16	Unified	3	163840	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0-79
node 0 size: 256913 MB
node 0 free: 241350 MB
node distances:
node 0
0: 10

9. /proc/meminfo

MemTotal: 263079224 kB

10. who -r

run-level 3 Dec 13 14:02

11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd audit-rules auditd avahi-daemon bluetooth chronyd crond cups dbus-broker fips-crypto-policy-overlay firewalld gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt lvm2-monitor mcelog mdmonitor multipathd nvme-fc-boot-connections qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-confext systemd-network-generator systemd-pstore systemd-sysextd tuned tuned-ppd udisks2 upower vgauthd vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq gnome-headless-session@ gnome-remote-desktop gnome-remote-desktop-configuration hypervfs-copyd iscsi-init iscsid iscsiuio kpatch kvm_stat ledmon low-memory-monitor lvm-devices-import man-db-restart-cache-update microcode netavark-dhcp-proxy netavark-firewalld-reload nftables nis-domainname nvme-f-autoconnect podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rhsm rhsm-facts rpmdm-migrate rpmdm-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

indirect
ssh-host-keys-migration sshd-keygen@ systemd-boot-check-no-failures systemd-boot-update
systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config
systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy
systemd-udev-load-credentials wpa_supplicant wsd yggdrasil yggdrasil@
iscsi pcsd spice-vdagentd sshd@ sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
sssd-sudo systemd-sysupdate systemd-sysupdate-reboot systemd-userdbd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-6.12.0-55.29.1.el10_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=2G-64G:256M,64G-:512M
resume=UUID=cbb685cf-16aa-4a09-bfd3-26b1fcd0cf61
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

14. cpupower frequency-info
analyzing CPU 57:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
No current active profile.

16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Platform Notes (Continued)

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs    60000
defrag                    1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs     10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 10.0 (Coughlan)
redhat-release  Red Hat Enterprise Linux release 10.0 (Coughlan)
system-release  Red Hat Enterprise Linux release 10.0 (Coughlan)
-----
```

```
-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs            tmpfs     70G   5.8G   65G   9% /mnt/ramdisk
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge XR8720t
Product Family: PowerEdge
Serial:         SLXR871
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  4x 00AD063200AD HMC94AHBRA487N 64 GB 2 rank 6400
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    Dell Inc.
BIOS Version:   1.0.4
BIOS Date:      11/13/2025
BIOS Revision:  1.0
-----
```

Compiler Version Notes

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
-----
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Compiler Version Notes (Continued)

```
=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
    | 541.leela_r(base, peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmallo

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-fdelayed-template-parsing

-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmallo

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto

-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmallo

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs

-fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-fno-strict-overflow -fno-strict-aliasing

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 346

PowerEdge XR8720t (Intel Xeon 6716P-B)

SPECrate®2017_int_peak = 350

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Jan-2026

Software Availability: Sep-2025

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmallo

502.gcc_r: basepeak = yes

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/intel-compilers/compiler/2025.2/lib
-lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-13 15:04:24-0500.

Report generated on 2026-01-14 13:46:30 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-13.