



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

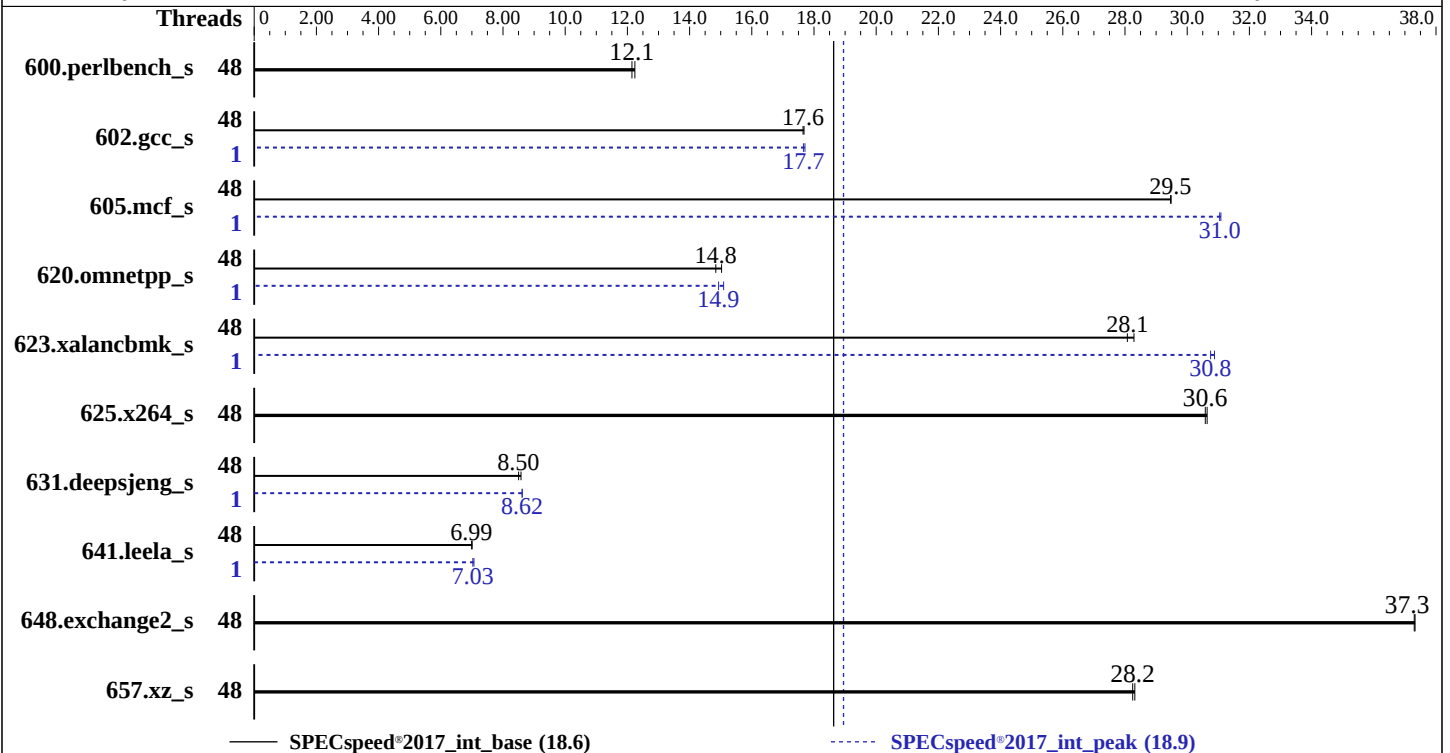

Hardware

CPU Name: AMD EPYC 9455
Max MHz: 4400
Nominal: 3150
Enabled: 48 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 50 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
6.8.0-90-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 1.5.3 released Oct-2025
File System: tmpfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	145	12.2	<u>146</u>	<u>12.1</u>			48	145	12.2	<u>146</u>	<u>12.1</u>		
602.gcc_s	48	<u>226</u>	<u>17.6</u>	225	17.7			1	225	17.7	<u>225</u>	<u>17.7</u>		
605.mcf_s	48	160	29.5	<u>160</u>	<u>29.5</u>			1	152	31.1	<u>152</u>	<u>31.0</u>		
620.omnetpp_s	48	109	15.0	<u>110</u>	<u>14.8</u>			1	<u>109</u>	<u>14.9</u>	108	15.1		
623.xalancbmk_s	48	<u>50.5</u>	<u>28.1</u>	50.1	28.3			1	45.9	30.9	<u>46.1</u>	<u>30.8</u>		
625.x264_s	48	<u>57.7</u>	<u>30.6</u>	57.6	30.6			48	<u>57.7</u>	<u>30.6</u>	57.6	30.6		
631.deepsjeng_s	48	<u>169</u>	<u>8.50</u>	167	8.58			1	166	8.62	<u>166</u>	<u>8.62</u>		
641.leela_s	48	243	7.01	<u>244</u>	<u>6.99</u>			1	241	7.07	<u>243</u>	<u>7.03</u>		
648.exchange2_s	48	78.8	37.3	<u>78.8</u>	<u>37.3</u>			48	78.8	37.3	<u>78.8</u>	<u>37.3</u>		
657.xz_s	48	218	28.3	<u>219</u>	<u>28.2</u>			48	218	28.3	<u>219</u>	<u>28.2</u>		

SPECspeed®2017_int_base = 18.6

SPECspeed®2017_int_peak = 18.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-47"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "15"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

Benchmark run from a 50 GB ramdisk created with the cmd: "mount -t tmpfs -o size=50G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Logical Processor : Disabled

Virtualization Technology : Disabled

NUMA Nodes Per Socket : 4

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link Power Management : Disabled

Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual

Determinism Slider : Power Determinism

Optimizer Mode : Enabled

Algorithm Performance Boost Disable : Enabled

Adaptive Allocation : Enabled

Dram Refresh Delay : Performance

DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLR7751-R7715 Wed Dec 24 18:41:39 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux SLR7751-R7715 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux

2. w
18:41:39 up 9 min, 2 users, load average: 0.40, 0.15, 0.05
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 18:32 1:30 1.07s 0.29s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
root 10.17.182.202 18:32 9:34 0.00s 0.01s sshd: root@notty

3. Username
From environment variable \$USER: root

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 3092971

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. sysinfo process ancestry

```
/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=6.3b --output_format
html, pdf, txt
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-VERS=6.3b
--output_format html, pdf, txt intspeer
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.3b --output_format html, pdf, txt --nopower --runmode speed --tune base:peak --size
test:train:refspeer intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intspeer.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9455 48-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping         : 1
microcode        : 0xb00215a
bugs             : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores        : 48
siblings         : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0:   core ids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 0:   apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	48
On-line CPU(s) list:	0-47
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	AMD
Model name:	AMD EPYC 9455 48-Core Processor
BIOS Model name:	AMD EPYC 9455 48-Core Processor
BIOS CPU family:	107

CPU @ 3.1GHz

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

CPU family: 26
Model: 2
Thread(s) per core: 1
Core(s) per socket: 48
Socket(s): 1
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 65%
CPU max MHz: 3150.0000
CPU min MHz: 1500.0000
BogoMIPS: 6290.85
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxt perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca avx512_vp2intersect flush_l1d debug_swap
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-11
NUMA node1 CPU(s): 12-23
NUMA node2 CPU(s): 24-35
NUMA node3 CPU(s): 36-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

L1i	32K	1.5M	8 Instruction	1	64	1	64
L2	1M	48M	16 Unified	2	1024	1	64
L3	32M	256M	16 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-11

node 0 size: 192823 MB

node 0 free: 192270 MB

node 1 cpus: 12-23

node 1 size: 193529 MB

node 1 free: 193018 MB

node 2 cpus: 24-35

node 2 size: 193486 MB

node 2 free: 188720 MB

node 3 cpus: 36-47

node 3 size: 193483 MB

node 3 free: 193075 MB

node distances:

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

9. /proc/meminfo

MemTotal: 791881872 kB

10. who -r

run-level 5 Dec 24 18:32

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)

Default Target Status

graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald unattended-upgrades

enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs

disabled console-getty debug-shell firewallld iscsid nftables serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower

indirect systemd-sysupdate systemd-sysupdate-reboot

masked cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=33505bb0-411d-431d-ab81-0138a91fa2d4
ro
```

14. cpupower frequency-info

```
analyzing CPU 28:
  current policy: frequency should be within 1.50 GHz and 3.15 GHz.
                  The governor "schedutil" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3150MHz
```

15. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness                1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	50G	3.3G	47G	7%	/mnt/ramdisk

20. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge R7715
Product Family: PowerEdge
Serial: SLR7751

21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x 802C0000802C MTC40F2046S1RC64BD1 64 GB 2 rank 6400, configured at 5200

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.5.3
BIOS Date: 10/29/2025
BIOS Revision: 1.5

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP

-flto -fremap-arrays -fstrip-mining -fstruct-layout=7

-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm

-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-Wl, -mllvm -Wl, -reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-iv-split -Wl, -mllvm -Wl, -inline-recursion=4
-Wl, -mllvm -Wl, -lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECspeed®2017_int_peak = 18.9

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

```
631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 18.6

SPECspeed®2017_int_peak = 18.9

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-24 13:41:39-0500.

Report generated on 2026-01-27 17:50:12 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-27.