



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

SPECrate®2017_fp_peak = 788

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

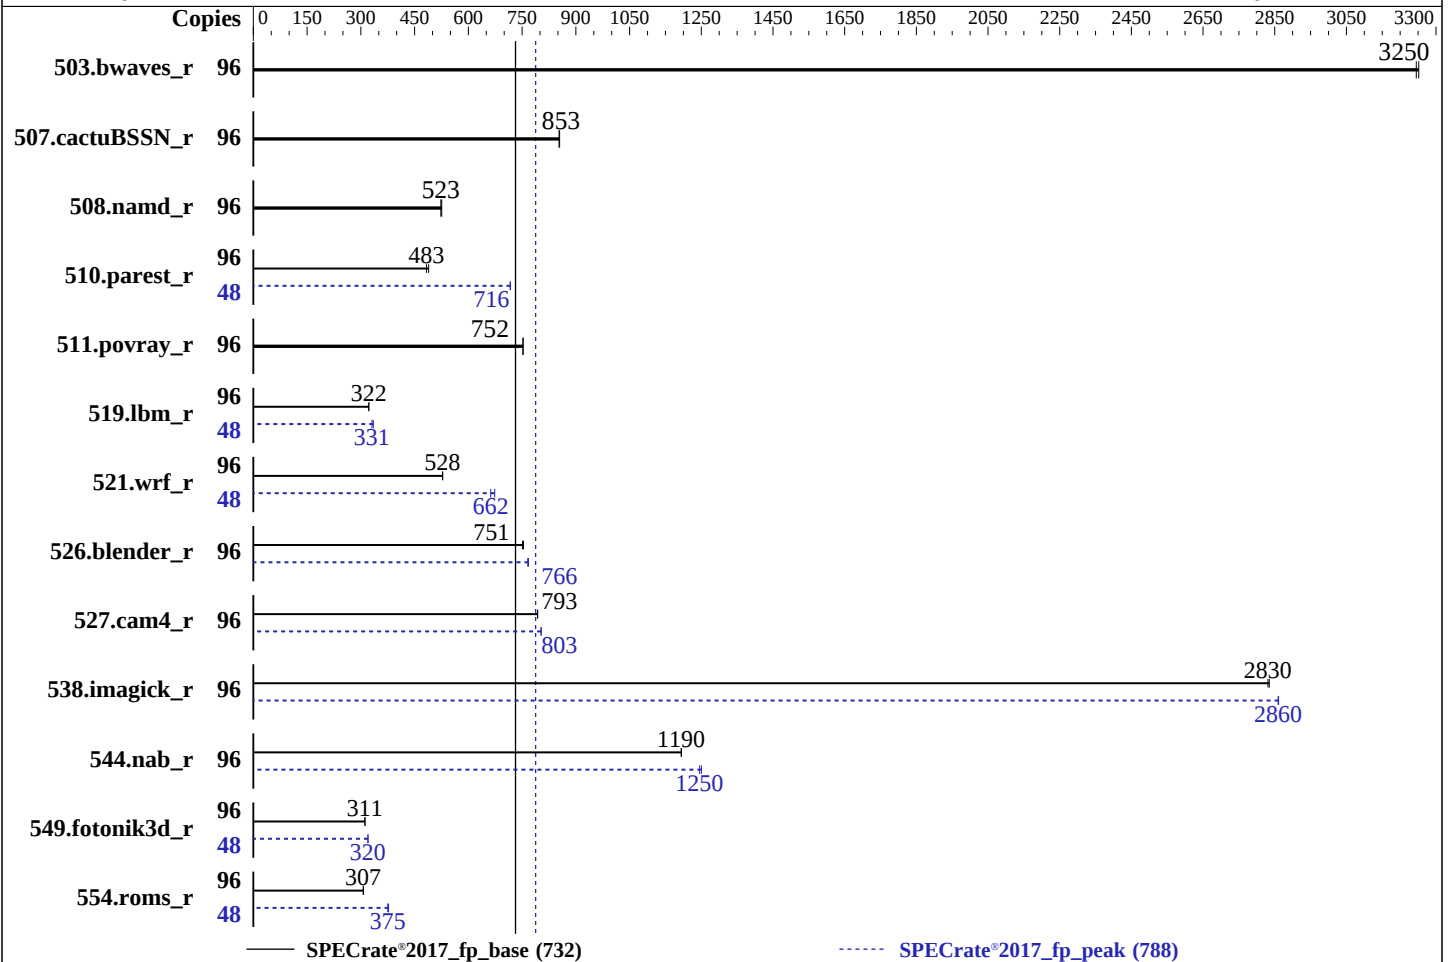

Hardware

CPU Name: AMD EPYC 9455
Max MHz: 4400
Nominal: 3150
Enabled: 48 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 70 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
6.8.0-90-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 1.5.3 released Oct-2025
File System: tmpfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	297	3250	296	3250			96	297	3250	296	3250		
507.cactuBSSN_r	96	142	855	142	853			96	142	855	142	853		
508.namd_r	96	173	526	174	523			96	173	526	174	523		
510.parest_r	96	513	489	520	483			48	175	718	175	716		
511.povray_r	96	298	752	298	753			96	298	752	298	753		
519.lbm_r	96	314	322	314	322			48	151	335	153	331		
521.wrf_r	96	407	528	407	528			48	160	674	162	662		
526.blender_r	96	194	754	195	751			96	190	768	191	766		
527.cam4_r	96	212	794	212	793			96	209	803	209	803		
538.imagick_r	96	84.2	2830	84.3	2830			96	83.5	2860	83.5	2860		
544.nab_r	96	135	1190	135	1190			96	129	1250	130	1250		
549.fotonik3d_r	96	1202	311	1200	312			48	585	320	585	320		
554.roms_r	96	497	307	497	307			48	203	375	202	377		

SPECrate®2017_fp_base = 732

SPECrate®2017_fp_peak = 788

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Virtualization Technology : Disabled
NUMA Nodes Per Socket : 4

System Profile : Custom
C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link Power Management : Disabled
Periodic Directory Rinse Tuning : Blended
Determinism Control : Manual
Determinism Slider : Power Determinism
Optimizer Mode : Enabled
Adaptive Allocation : Enabled
Dram Refresh Delay : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLR7751-R7715 Wed Dec 24 12:11:23 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

SPECrate®2017_fp_peak = 788

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

```
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----

1. uname -a
Linux SLR7751-R7715 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux
-----

2. w
12:11:23 up 2:50, 1 user, load average: 66.77, 88.45, 92.43
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1      -             09:21    2:47m  1.43s  0.43s  /bin/bash ./amd_rate_aocc500_znver5_A1.sh
-----

3. Username
From environment variable $USER: root
-----

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3092896
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.3b --output_format
html,pdf,txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-VERS=6.3b
--output_format html,pdf,txt fprate
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

```
runccp --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.3b --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runccp 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9455 48-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00215a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 48
siblings        : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0:  core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0:  apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            96
On-line CPU(s) list: 0-95
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    AMD
Model name:        AMD EPYC 9455 48-Core Processor
BIOS Model name:   AMD EPYC 9455 48-Core Processor
BIOS CPU family:   107
CPU family:        26
Model:             2
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s):         1
Stepping:          1
Frequency boost:    enabled
CPU(s) scaling MHz: 56%
CPU max MHz:       3150.0000
CPU min MHz:       1500.0000
BogoMIPS:          6290.82
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                  osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                  perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
```

CPU @ 3.1GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca avx512_vp2intersect flush_lld debug_swap

Virtualization:

L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 256 MiB (8 instances)

NUMA node(s): 4
NUMA node0 CPU(s): 0-11,48-59
NUMA node1 CPU(s): 12-23,60-71
NUMA node2 CPU(s): 24-35,72-83
NUMA node3 CPU(s): 36-47,84-95

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 192818 MB
node 0 free: 191576 MB
node 1 cpus: 12-23,60-71
node 1 size: 193482 MB
node 1 free: 192318 MB
node 2 cpus: 24-35,72-83
node 2 size: 193525 MB
node 2 free: 192316 MB
node 3 cpus: 36-47,84-95

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

node 3 size: 193476 MB

node 3 free: 189120 MB

node distances:

node	0	1	2	3
0:	10	12	12	12
1:	12	10	12	12
2:	12	12	10	12
3:	12	12	12	10

9. /proc/meminfo

MemTotal: 791862652 kB

10. who -r

run-level 5 Dec 24 09:20

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald unattended-upgrades
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell firewalld iscsid nftables serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext systemd-time-wait-sync upower
indirect	systemd-sysupdate systemd-sysupdate-reboot
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=33505bb0-411d-431d-ab81-0138a91fa2d4
ro

14. cpupower frequency-info

analyzing CPU 79:

current policy: frequency should be within 1.50 GHz and 3.15 GHz.
The governor "schedutil" may decide which speed to use within this range.

boost state support:

Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3150MHz

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	70G	3.3G	67G	5%	/mnt/ramdisk

20. /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge R7715
Product Family:	PowerEdge
Serial:	SLR7751

21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

SPECrate®2017_fp_peak = 788

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x 802C0000802C MTC40F2046S1RC64BD1 64 GB 2 rank 6400, configured at 5200

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.

BIOS Version: 1.5.3

BIOS Date: 10/29/2025

BIOS Revision: 1.5

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

SPECrate®2017_fp_peak = 788

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -ldl

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Peak Optimization Flags (Continued)

554.roms_r (continued):

-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 732

PowerEdge R7715 (AMD EPYC 9455 48-Core Processor)

SPECrate®2017_fp_peak = 788

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2025

Hardware Availability: Nov-2025

Software Availability: Dec-2025

Peak Optimization Flags (Continued)

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-24 07:11:23-0500.

Report generated on 2026-01-27 17:50:32 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-27.