



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

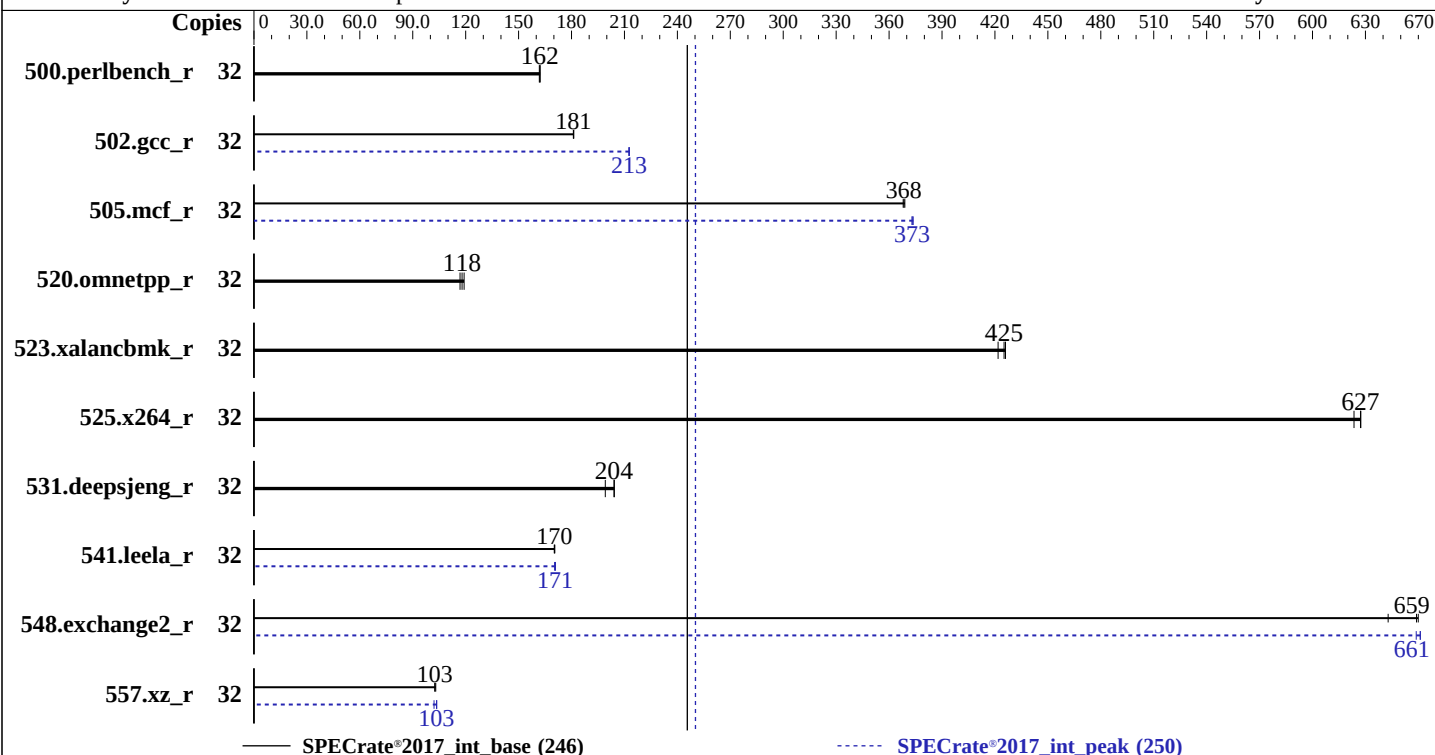

## Hardware

CPU Name: AMD EPYC 9135  
Max MHz: 4300  
Nominal: 3650  
Enabled: 16 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 64 MB I+D on chip per chip,  
16 MB shared / 4 cores  
Other: None  
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 1 x 3.2 TB PCIe NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6 (x86\_64)  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
Parallel: No  
Firmware: Version 0302 released Jun-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance  
at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Results Table

| Benchmark       | Base   |             |            |            |            |             |            | Peak   |             |            |            |            |             |            |
|-----------------|--------|-------------|------------|------------|------------|-------------|------------|--------|-------------|------------|------------|------------|-------------|------------|
|                 | Copies | Seconds     | Ratio      | Seconds    | Ratio      | Seconds     | Ratio      | Copies | Seconds     | Ratio      | Seconds    | Ratio      | Seconds     | Ratio      |
| 500.perlbench_r | 32     | 315         | 162        | <b>314</b> | <b>162</b> | 314         | 162        | 32     | 315         | 162        | <b>314</b> | <b>162</b> | 314         | 162        |
| 502.gcc_r       | 32     | 250         | 181        | <b>250</b> | <b>181</b> | 250         | 181        | 32     | 213         | 213        | 213        | 213        | <b>213</b>  | <b>213</b> |
| 505.mcf_r       | 32     | 141         | 368        | 140        | 369        | <b>140</b>  | <b>368</b> | 32     | <b>139</b>  | <b>373</b> | 138        | 374        | 139         | 373        |
| 520.omnetpp_r   | 32     | 359         | 117        | <b>356</b> | <b>118</b> | 352         | 119        | 32     | 359         | 117        | <b>356</b> | <b>118</b> | 352         | 119        |
| 523.xalancbmk_r | 32     | 79.3        | 426        | 80.1       | 422        | <b>79.5</b> | <b>425</b> | 32     | 79.3        | 426        | 80.1       | 422        | <b>79.5</b> | <b>425</b> |
| 525.x264_r      | 32     | <b>89.3</b> | <b>627</b> | 89.9       | 624        | 89.3        | 627        | 32     | <b>89.3</b> | <b>627</b> | 89.9       | 624        | 89.3        | 627        |
| 531.deepsjeng_r | 32     | 180         | 204        | <b>180</b> | <b>204</b> | 184         | 199        | 32     | 180         | 204        | <b>180</b> | <b>204</b> | 184         | 199        |
| 541.leela_r     | 32     | <b>311</b>  | <b>170</b> | 311        | 170        | 311         | 170        | 32     | 311         | 170        | <b>310</b> | <b>171</b> | 310         | 171        |
| 548.exchange2_r | 32     | 130         | 643        | <b>127</b> | <b>659</b> | 127         | 660        | 32     | 127         | 659        | <b>127</b> | <b>661</b> | 127         | 661        |
| 557.xz_r        | 32     | <b>337</b>  | <b>103</b> | 337        | 103        | 335         | 103        | 32     | 333         | 104        | <b>334</b> | <b>103</b> | 339         | 102        |

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
OS set to performance mode via cpupower frequency-set -g performance  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

**SPECrate®2017\_int\_base = 246**

**SPECrate®2017\_int\_peak = 250**

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Dec-2025

**Hardware Availability:** Jun-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/aocc500A1/amd\_rate\_aocc500\_znver5\_A\_lib/lib:/aocc500A1/amd\_rate\_aocc500\_znver5\_A\_lib/lib32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

SR-IOV Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS4

Determinism Control = Manual

DRAM Scrub time = Disabled

Engine Boost = Aggressive

TDP Control = Manual

TDP = 240

PPT Control = Manual

PPT = 240

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /aocc500A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sat Dec 6 01:02:57 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

```
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:02:57 up 7:24, 1 user, load average: 7.94, 18.83, 23.70
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -              17:39    7:23m  0.78s  0.04s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3093291
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3093291
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./rate.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.586/temlogs/preenv.intrate.586.0.log --lognum 586.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /aocc500A1
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9135 16-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002147
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 16
siblings        : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0:  core ids 0-3,8-11,16-19,24-27
physical id 0:  apicids 0-7,16-23,32-39,48-55
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            32
On-line CPU(s) list: 0-31
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9135 16-Core Processor
BIOS Model name:   AMD EPYC 9135 16-Core Processor
BIOS CPU family:   107
CPU family:        26
Model:            2
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s):         1
Stepping:          1
Frequency boost:    enabled
CPU(s) scaling MHz: 88%
CPU max MHz:       4305.8589
CPU min MHz:       1500.0000
BogoMIPS:          7289.19
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                  osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                  perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                  ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                  smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                  avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                  cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                  xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                  nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                  pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
```

Unknown CPU @ 3.6GHz

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_l1d debug\_swap  
L1d cache: 768 KiB (16 instances)  
L1i cache: 512 KiB (16 instances)  
L2 cache: 16 MiB (16 instances)  
L3 cache: 64 MiB (4 instances)  
NUMA node(s): 4  
NUMA node0 CPU(s): 0-3,16-19  
NUMA node1 CPU(s): 4-7,20-23  
NUMA node2 CPU(s): 8-11,24-27  
NUMA node3 CPU(s): 12-15,28-31  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP  
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 768K     | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 512K     | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 16M      | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 16M      | 64M      | 16   | Unified     | 3     | 16384 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0-3,16-19  
node 0 size: 192806 MB  
node 0 free: 192254 MB  
node 1 cpus: 4-7,20-23  
node 1 size: 193533 MB  
node 1 free: 192969 MB  
node 2 cpus: 8-11,24-27  
node 2 size: 193533 MB  
node 2 free: 193028 MB  
node 3 cpus: 12-15,28-31  
node 3 size: 193475 MB  
node 3 free: 192928 MB  
node distances:  
node 0 1 2 3  
0: 10 12 12 12  
1: 12 10 12 12  
2: 12 12 10 12  
3: 12 12 12 10

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 791909424 kB

10. who -r

run-level 3 Dec 5 17:39

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect postfix  
purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info  
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd-generate\_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
systemd-timesyncd tuned udisks2  
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=8bcfd5a5-8f30-49cc-9aa9-2e306fa29252  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
video=1024x768

14. cpupower frequency-info

analyzing CPU 24:

current policy: frequency should be within 1.50 GHz and 3.65 GHz.  
The governor "performance" may decide which speed to use  
within this range.

boost state support:

Supported: yes  
Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance

16. sysctl

|                             |    |
|-----------------------------|----|
| kernel.numa_balancing       | 1  |
| kernel.randomize_va_space   | 0  |
| vm.compaction_proactiveness | 20 |
| vm.dirty_background_bytes   | 0  |

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

|                              |       |
|------------------------------|-------|
| vm.dirty_background_ratio    | 10    |
| vm.dirty_bytes               | 0     |
| vm.dirty_expire_centisecs    | 3000  |
| vm.dirty_ratio               | 8     |
| vm.dirty_writeback_centisecs | 500   |
| vm.dirtytime_expire_seconds  | 43200 |
| vm.extfrag_threshold         | 500   |
| vm.min_unmapped_ratio        | 1     |
| vm.nr_hugepages              | 0     |
| vm.nr_hugepages_mempolicy    | 0     |
| vm.nr_overcommit_hugepages   | 0     |
| vm.swappiness                | 1     |
| vm.watermark_boost_factor    | 15000 |
| vm.watermark_scale_factor    | 10    |
| vm.zone_reclaim_mode         | 1     |

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force  
-----

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6  
-----

-----  
20. Disk information  
SPEC is set to: /aocc500A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p4 xfs 2.8T 99G 2.7T 4% /  
-----

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: ASUSTeK COMPUTER INC.  
Product: RS520QA-E13-RS8U  
Product Family: Server  
Serial: /psn/  
-----

-----  
22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
6x Samsung M321R8GA0EB2-CCPPC 64 GB 2 rank 6400  
6x Samsung M321R8GA0EB2-CCPWC 64 GB 2 rank 6400  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 0302  
BIOS Date: 06/26/2025  
BIOS Revision: 3.2

## Compiler Version Notes

=====

|   |                 |
|---|-----------------|
| C | 502.gcc_r(peak) |
|---|-----------------|

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----

=====

|   |                                                                                          |
|---|------------------------------------------------------------------------------------------|
| C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak) |
|   | 557.xz_r(base, peak)                                                                     |

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----

=====

|   |                 |
|---|-----------------|
| C | 502.gcc_r(peak) |
|---|-----------------|

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----

=====

|   |                                                                                          |
|---|------------------------------------------------------------------------------------------|
| C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak) |
|   | 557.xz_r(base, peak)                                                                     |

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----

=====

|     |                                                                                   |
|-----|-----------------------------------------------------------------------------------|
| C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak) |
|     | 541.leela_r(base, peak)                                                           |

-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Compiler Version Notes (Continued)

=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

**SPECrate®2017\_int\_base = 246**

**SPECrate®2017\_int\_peak = 250**

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Dec-2025

**Hardware Availability:** Jun-2025

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

C benchmarks (continued):

-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Dec-2025

**Hardware Availability:** Jun-2025

**Software Availability:** Oct-2024

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

502.gcc\_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner  
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM  
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc

505.mcf\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

525.x264\_r: basepeak = yes

557.xz\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang  
-lamdalloc-ext -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -flto -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc -ldl



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(3.65 GHz, AMD EPYC 9135)

SPECrate®2017\_int\_base = 246

SPECrate®2017\_int\_peak = 250

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Dec-2025

**Hardware Availability:** Jun-2025

**Software Availability:** Oct-2024

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd\_rate\_aocc500\_znver5\_A\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.2.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.2.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-05 12:02:57-0500.

Report generated on 2026-01-27 17:50:13 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-27.