



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857


Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

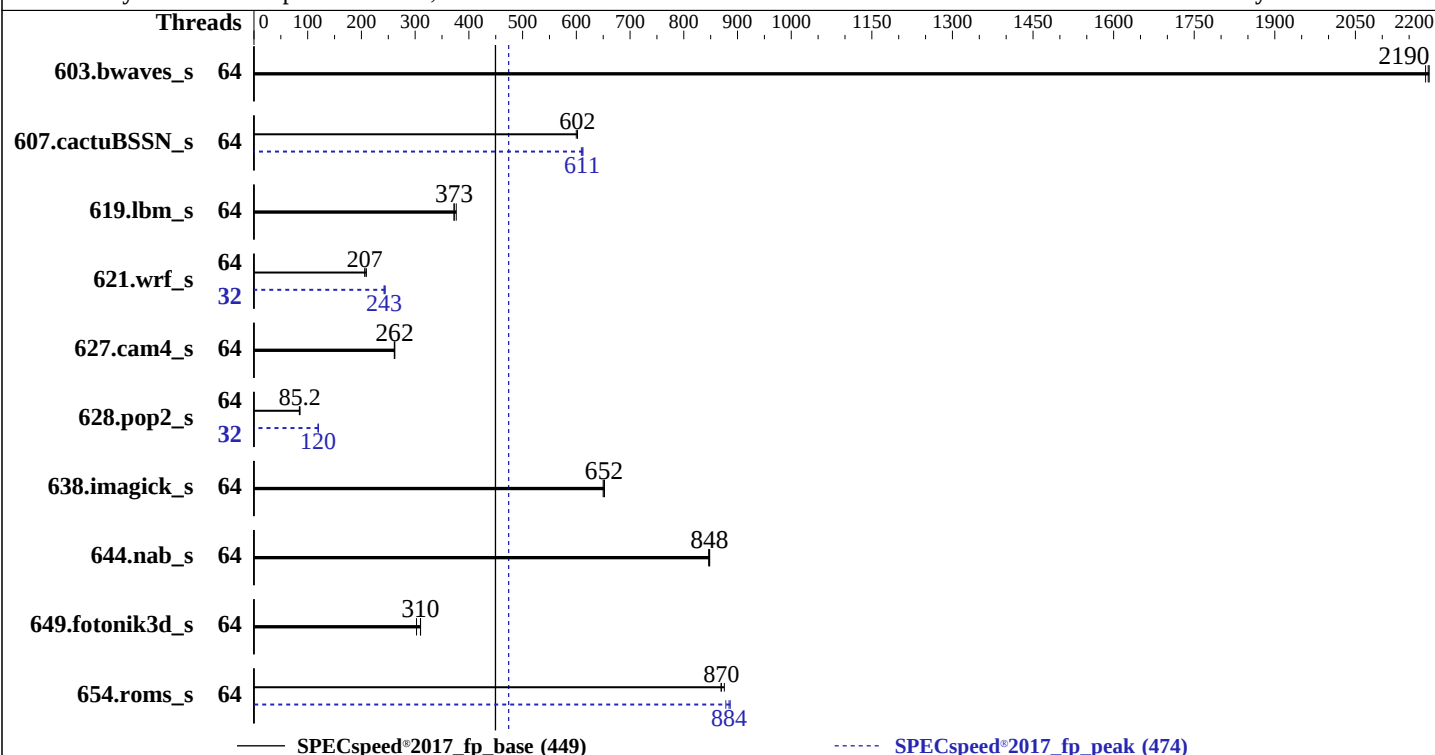

## Hardware

CPU Name: AMD EPYC 9355  
Max MHz: 4400  
Nominal: 3550  
Enabled: 64 cores, 2 chips  
Orderable: 2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 1 x 931 GB NVME SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
kernel version 6.4.0-150600.21-default  
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
Parallel: Yes  
Firmware: American Megatrends Version 10.27.0 released Dec-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Results Table

| Benchmark       | Base    |             |             |             |            |             |            | Peak    |             |             |             |            |             |            |
|-----------------|---------|-------------|-------------|-------------|------------|-------------|------------|---------|-------------|-------------|-------------|------------|-------------|------------|
|                 | Threads | Seconds     | Ratio       | Seconds     | Ratio      | Seconds     | Ratio      | Threads | Seconds     | Ratio       | Seconds     | Ratio      | Seconds     | Ratio      |
| 603.bwaves_s    | 64      | <b>27.0</b> | <b>2190</b> | 27.1        | 2180       | 27.0        | 2190       | 64      | <b>27.0</b> | <b>2190</b> | 27.1        | 2180       | 27.0        | 2190       |
| 607.cactuBSSN_s | 64      | 27.8        | 600         | 27.7        | 602        | <b>27.7</b> | <b>602</b> | 64      | 27.4        | 609         | <b>27.3</b> | <b>611</b> | 27.2        | 612        |
| 619.lbm_s       | 64      | 14.1        | 372         | <b>14.0</b> | <b>373</b> | 13.9        | 377        | 64      | 14.1        | 372         | <b>14.0</b> | <b>373</b> | 13.9        | 377        |
| 621.wrf_s       | 64      | <b>64.0</b> | <b>207</b>  | 64.1        | 206        | 63.2        | 209        | 32      | 54.1        | 244         | <b>54.5</b> | <b>243</b> | 54.6        | 242        |
| 627.cam4_s      | 64      | <b>33.8</b> | <b>262</b>  | 33.9        | 261        | 33.8        | 262        | 64      | <b>33.8</b> | <b>262</b>  | 33.9        | 261        | 33.8        | 262        |
| 628.pop2_s      | 64      | <b>139</b>  | <b>85.2</b> | 141         | 84.5       | 139         | 85.6       | 32      | 98.9        | 120         | <b>99.3</b> | <b>120</b> | 99.6        | 119        |
| 638.imagick_s   | 64      | 22.2        | 650         | <b>22.1</b> | <b>652</b> | 22.1        | 652        | 64      | 22.2        | 650         | <b>22.1</b> | <b>652</b> | 22.1        | 652        |
| 644.nab_s       | 64      | 20.6        | 846         | <b>20.6</b> | <b>848</b> | 20.6        | 848        | 64      | 20.6        | 846         | <b>20.6</b> | <b>848</b> | 20.6        | 848        |
| 649.fotonik3d_s | 64      | 30.1        | 303         | 29.4        | 310        | <b>29.4</b> | <b>310</b> | 64      | 30.1        | 303         | 29.4        | 310        | <b>29.4</b> | <b>310</b> |
| 654.roms_s      | 64      | 18.0        | 875         | 18.1        | 869        | <b>18.1</b> | <b>870</b> | 64      | 17.9        | 878         | <b>17.8</b> | <b>884</b> | 17.8        | 886        |

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-63"

LD\_LIBRARY\_PATH =

"/tool/speccpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/tool/speccpu2017/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf\_s peak run:

GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 628.pop2\_s peak run:

GOMP\_CPU\_AFFINITY = "0-31"

Environment variables set by runcpu during the 654.roms\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Setting:

Performance Mode: Performance

APBDIS: 1

DRAM Scrub Time: Disabled

L1 Stride Prefetcher: Disabled

NUMA nodes per socket: NPS1

PPT: 300

PPT Control: Manual

SMT Control: Disabled

TDP: 300

TDP Control: Manual

SVM Mode: Disabled

SR-IOV Support: Disabled

Sysinfo program /tool/speccpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Mon Dec 29 06:36:54 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Platform Notes (Continued)

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
06:36:54 up 11 min, 1 user, load average: 0.13, 0.06, 0.02
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -              06:25    11:41   0.77s   0.06s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6190767
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6190767
virtual memory           (kbytes, -v) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Platform Notes (Continued)

file locks

(-x) unlimited

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
bash /tool/scriptRun/command.sh
/bin/bash ./run_amdSpeccpu_speed.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /tool/speccpu2017
```

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9355 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002152
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 32
siblings        : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
physical id 1: core ids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
physical id 1: apicids 128-131,144-147,160-163,176-179,192-195,208-211,224-227,240-243
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

### 7. lscpu

From lscpu from util-linux 2.39.3:

|                      |                                   |                      |
|----------------------|-----------------------------------|----------------------|
| Architecture:        | x86_64                            |                      |
| CPU op-mode(s):      | 32-bit, 64-bit                    |                      |
| Address sizes:       | 52 bits physical, 57 bits virtual |                      |
| Byte Order:          | Little Endian                     |                      |
| CPU(s):              | 64                                |                      |
| On-line CPU(s) list: | 0-63                              |                      |
| Vendor ID:           | AuthenticAMD                      |                      |
| BIOS Vendor ID:      | Advanced Micro Devices, Inc.      |                      |
| Model name:          | AMD EPYC 9355 32-Core Processor   |                      |
| BIOS Model name:     | AMD EPYC 9355 32-Core Processor   | Unknown CPU @ 3.5GHz |
| BIOS CPU family:     | 107                               |                      |
| CPU family:          | 26                                |                      |
| Model:               | 2                                 |                      |
| Thread(s) per core:  | 1                                 |                      |
| Core(s) per socket:  | 32                                |                      |
| Socket(s):           | 2                                 |                      |
| Stepping:            | 1                                 |                      |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Platform Notes (Continued)

Frequency boost: enabled  
CPU(s) scaling MHz: 85%  
CPU max MHz: 4413.2319  
CPU min MHz: 1500.0000  
BogoMIPS: 7089.69  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good amd\_lbr\_v2 nopl nonstop\_tsc cpuid extd\_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 hw\_pstate ssbd mba perfmon\_v2 ibrs ibpb stibp ibrs\_enhanced vmmcall fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect flush\_l1d debug\_swap  
L1d cache: 3 MiB (64 instances)  
L1i cache: 2 MiB (64 instances)  
L2 cache: 64 MiB (64 instances)  
L3 cache: 512 MiB (16 instances)  
NUMA node(s): 2  
NUMA node0 CPU(s): 0-31  
NUMA node1 CPU(s): 32-63  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 3M       | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 2M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 64M      | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 512M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-31

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Platform Notes (Continued)

```
node 0 size: 773663 MB
node 0 free: 772907 MB
node 1 cpus: 32-63
node 1 size: 774054 MB
node 1 free: 773089 MB
node distances:
node  0  1
  0:  10  32
  1:  32  10
```

```
-----
9. /proc/meminfo
   MemTotal:      1584862940 kB
```

```
-----
10. who -r
    run-level 3 Dec 29 06:25
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target      Status
    multi-user          running
```

```
-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections
nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime                     systemd-remount-fs
disabled                            autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdm issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned vncserver@
indirect                            systemd-userdbd wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=3bf28d1c-5ec6-4579-8989-4b0f7be7b959
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
    analyzing CPU 56:
        current policy: frequency should be within 1.50 GHz and 3.55 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.
        boost state support:
            Supported: yes
            Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Platform Notes (Continued)

15. tuned-adm active  
No current active profile.

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

-----  
20. Disk information  
SPEC is set to: /tool/speccpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 xfs 931G 61G 870G 7% /

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: COMPAL  
Product: COMPAL SERVER  
Product Family: COMPAL  
Serial: 7901567500001

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Platform Notes (Continued)

### 22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

16x Samsung M321R8GA0EB2-CCPKC 64 GB 2 rank 6400

8x Samsung M321R8GA0EB2-CCPWF 64 GB 2 rank 6400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.

BIOS Version: 10.27.00

BIOS Date: 12/17/2025

BIOS Revision: 5.35

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Base Optimization Flags (Continued)

C benchmarks (continued):

-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt  
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100  
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Peak Optimization Flags (Continued)

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

621.wrf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang

627.cam4\_s: basepeak = yes

628.pop2\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fscalar-transform  
-fvector-transform -Mrecursive -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC\_OPENMP  
-fremap-arrays -fstrip-mining -fstruct-layout=9  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR224-2A  
AMD EPYC 9355

SPECspeed®2017\_fp\_base = 449

SPECspeed®2017\_fp\_peak = 474

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Dec-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2025

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-AMD\\_V1.4.html](http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-AMD_V1.4.html)

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-AMD\\_V1.4.xml](http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-AMD_V1.4.xml)

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-12-28 17:36:53-0500.

Report generated on 2026-01-27 17:51:16 by CPU2017 PDF formatter v6716.

Originally published on 2026-01-27.