



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

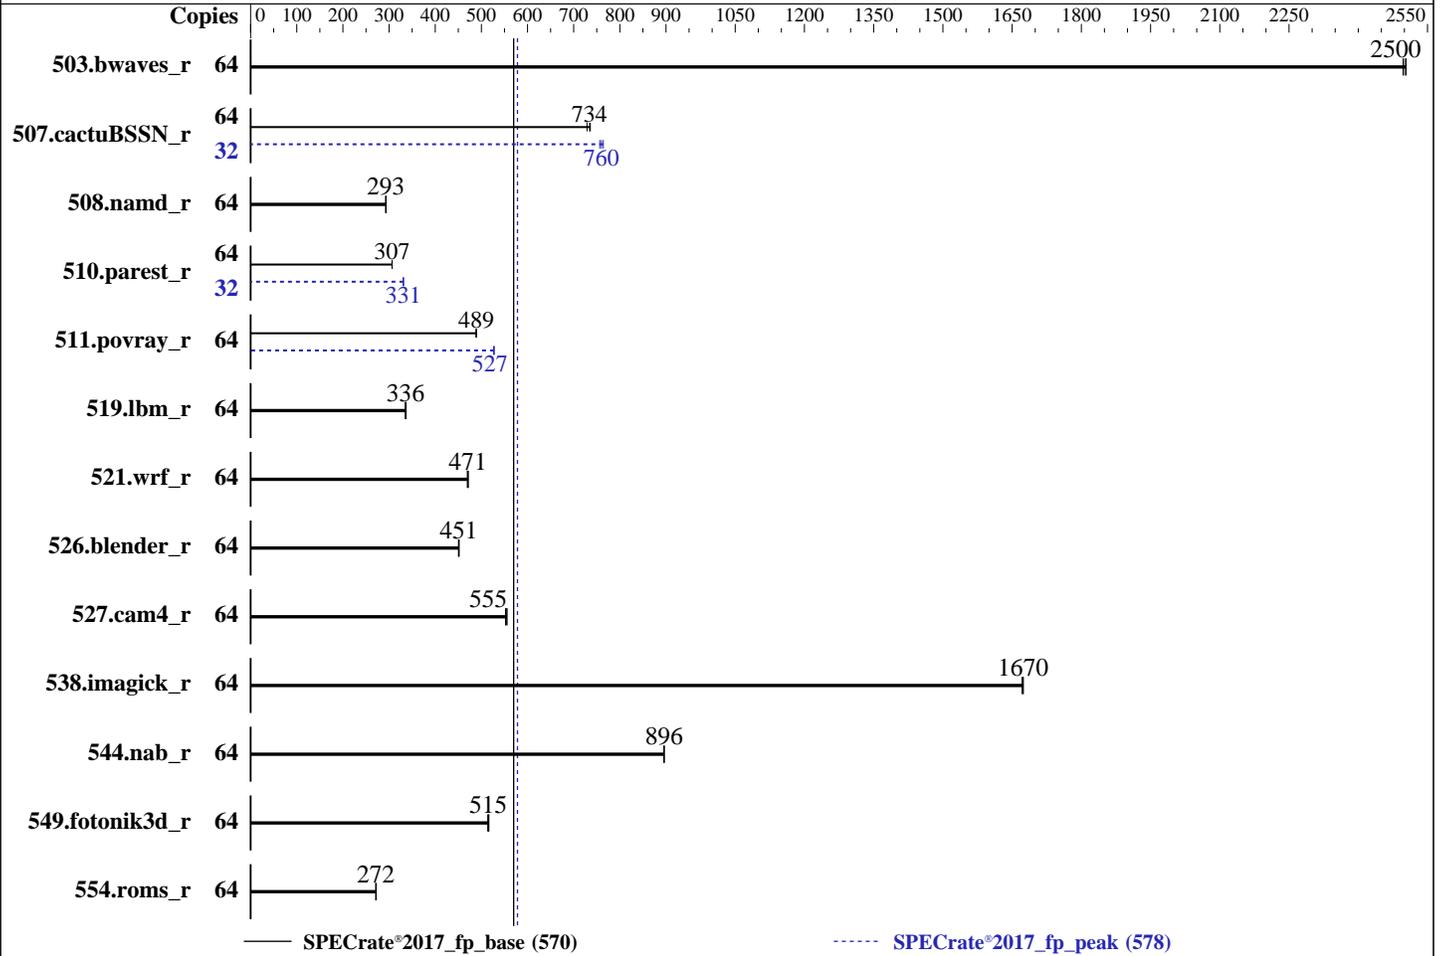

Hardware

CPU Name: Intel Xeon 6515P
 Max MHz: 3800
 Nominal: 2300
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 72 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 1.6 TB PCIe NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 0701 released Oct-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	257	2500	256	2500	<u>257</u>	<u>2500</u>	64	257	2500	256	2500	<u>257</u>	<u>2500</u>
507.cactuBSSN_r	64	110	736	110	734	111	729	32	53.6	756	53.0	764	<u>53.3</u>	<u>760</u>
508.namd_r	64	207	293	208	293	<u>207</u>	<u>293</u>	64	207	293	208	293	<u>207</u>	<u>293</u>
510.parest_r	64	546	306	546	307	546	307	32	253	331	253	331	<u>253</u>	<u>331</u>
511.povray_r	64	306	489	306	489	306	489	64	<u>283</u>	<u>527</u>	284	527	283	527
519.lbm_r	64	200	337	201	335	<u>201</u>	336	64	200	337	201	335	<u>201</u>	<u>336</u>
521.wrf_r	64	305	469	305	471	304	472	64	305	469	305	471	304	472
526.blender_r	64	<u>216</u>	<u>451</u>	216	452	216	450	64	<u>216</u>	<u>451</u>	216	452	216	450
527.cam4_r	64	203	552	<u>202</u>	555	202	555	64	203	552	<u>202</u>	555	202	555
538.imagick_r	64	<u>95.1</u>	<u>1670</u>	95.1	1670	95.2	1670	64	<u>95.1</u>	<u>1670</u>	95.1	1670	95.2	1670
544.nab_r	64	120	896	120	896	120	896	64	120	896	<u>120</u>	896	120	896
549.fotonik3d_r	64	484	515	483	516	485	514	64	484	515	483	516	485	514
554.roms_r	64	375	271	375	272	374	272	64	375	271	375	272	374	272

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/ic24u1/lib/intel64:/ic24u1/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
 ENERGY_PERF_BIAS_CFG mode = Performance
 Latency Optimized Mode = Enabled
 Engine Boost = Aggressive
 SR-IOV Support = Disabled
 Page Policy = Adaptive
 DCU Streamer Prefetcher = Disable
 LLC dead line alloc = Disable

Sysinfo program /ic24ul/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Mon Jan 19 16:00:58 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

 1. uname -a
 Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
 x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```
-----
2. w
 16:00:58 up 4 days, 40 min,  2 users,  load average: 43.86, 58.91, 61.87
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     -             Thu15   4:31m  1.11s  0.00s  /bin/bash ./rate.sh
root      tty2     -             Fri08   4:31m  0.04s  0.04s  -bash
```

```
-----
3. Username
From environment variable $USER:  root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 2062130
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062130
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.664/templogs/preenv.fprate.664.0.log --lognum 664.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24ul
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6515P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 16
siblings       : 32
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      64
On-line CPU(s) list:        0-63
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6515P
BIOS Model name:             Intel(R) Xeon(R) 6515P  CPU @ 2.3GHz
BIOS CPU family:             179
CPU family:                   6
Model:                       173
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                   2
Stepping:                    1
CPU(s) scaling MHz:          43%
CPU max MHz:                  3800.0000
CPU min MHz:                  800.0000
BogoMIPS:                    4600.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                               xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                               ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
                               rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                               clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                               xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnni avx512vbmi
                               umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                               avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                               cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                               pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                               arch_capabilities
Virtualization:              VT-x
L1d cache:                   1.5 MiB (32 instances)
L1i cache:                   2 MiB (32 instances)
L2 cache:                    64 MiB (32 instances)
L3 cache:                    144 MiB (2 instances)
NUMA node(s):                2

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```

NUMA node0 CPU(s):          0-15,32-47
NUMA node1 CPU(s):          16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                              PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	64K	2M	16	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	72M	144M	16	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 257543 MB
node 0 free: 239247 MB
node 1 cpus: 16-31,48-63
node 1 size: 258015 MB
node 1 free: 244340 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10

```

9. /proc/meminfo

MemTotal: 527932452 kB

10. who -r

run-level 3 Jan 15 15:21

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvme-fc-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```

enabled-runtime systemd-remount-fs
disabled        autofsd autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chryond console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures
                systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                systemd-timesyncd tuned udisks2 vncserver@
indirect        systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet
video=1024x768

```

14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

15. tuned-adm active

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

```

16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

17. /sys/kernel/mm/transparent_hugepage

```

defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jun-2024

Platform Notes (Continued)

hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /ic24ul
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 500G 111G 390G 23% /

21. /sys/devices/virtual/dmi/id
Vendor: ASUSTeK COMPUTER INC.
Product: RS720-E12-RS8G
Product Family: Server
Serial: /psn/

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x Samsung M321R4GA3PB2-CCPEC 32 GB 2 rank 6400
8x Samsung M321R4GA3PB2-CCPCC 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends Inc.
BIOS Version: 0701
BIOS Date: 10/13/2025
BIOS Revision: 7.1

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECrate®2017_fp_base = 570

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Date: Jan-2026

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2025

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2024

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.30 GHz, Intel Xeon 6515P)

SPECrate®2017_fp_base = 570

SPECrate®2017_fp_peak = 578

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-01-19 03:00:57-0500.

Report generated on 2026-02-10 19:32:28 by CPU2017 PDF formatter v6716.

Originally published on 2026-02-10.