



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017_fp_base = 520

SPECspeed®2017_fp_peak = 570

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

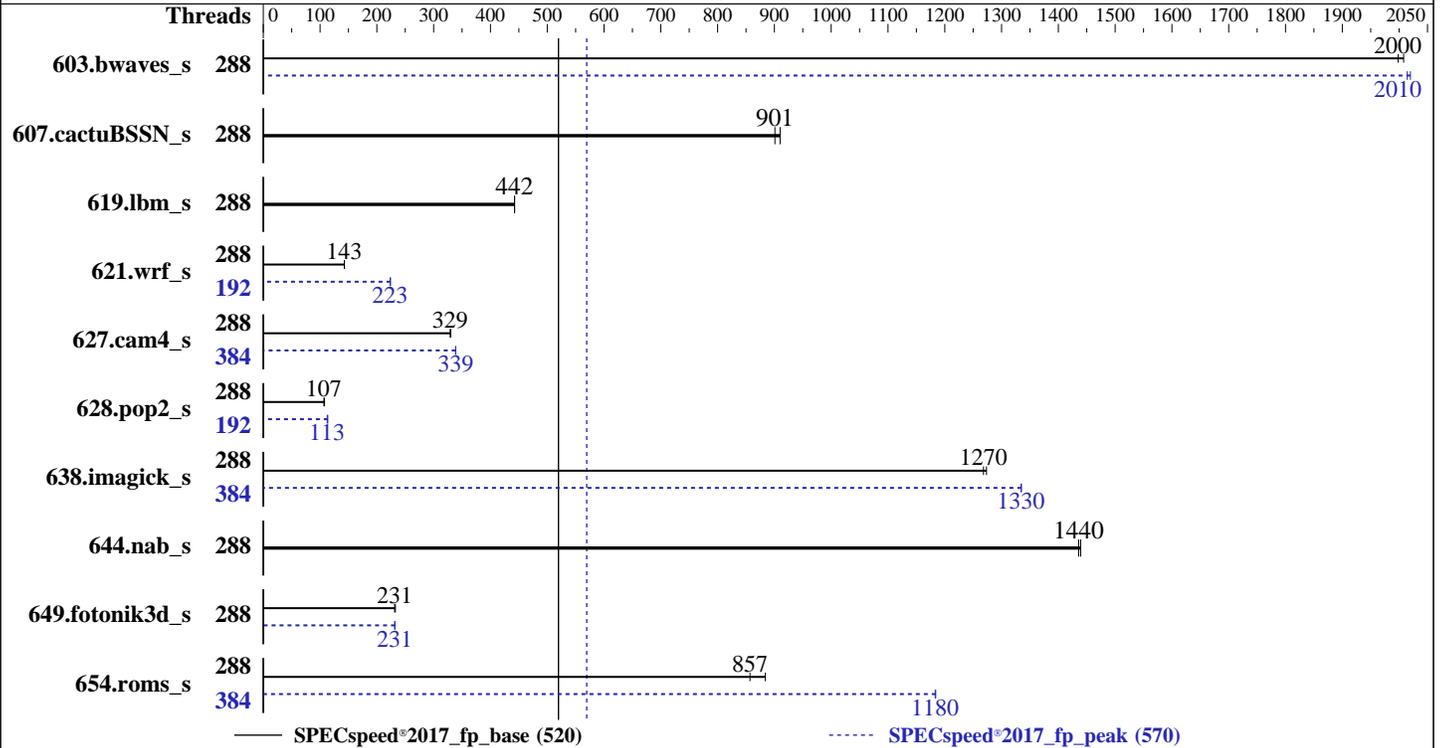

Hardware

CPU Name: AMD EPYC 9965
 Max MHz: 3700
 Nominal: 2250
 Enabled: 384 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores
 Other: None
 Memory: 3 TB (24 x 128 GB 2Rx4 PC5-6400B-R)
 Storage: 340 GB on tmpfs
 Other: CPU Cooling: DLC

Software

OS: Ubuntu 24.04.3 LTS
 6.8.0-90-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.2.0 released Nov-2025
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECSpeed®2017_fp_base = 520

SPECSpeed®2017_fp_peak = 570

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Dec-2025

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	288	<u>29.5</u>	<u>2000</u>	29.4	2010			288	<u>29.3</u>	<u>2010</u>	29.2	2020		
607.cactuBSSN_s	288	18.3	910	<u>18.5</u>	<u>901</u>			288	18.3	910	<u>18.5</u>	<u>901</u>		
619.lbm_s	288	11.8	443	<u>11.8</u>	<u>442</u>			288	11.8	443	<u>11.8</u>	<u>442</u>		
621.wrf_s	288	<u>92.7</u>	<u>143</u>	92.5	143			192	<u>59.2</u>	<u>223</u>	59.1	224		
627.cam4_s	288	<u>26.9</u>	<u>329</u>	26.9	330			384	<u>26.2</u>	<u>339</u>	26.2	339		
628.pop2_s	288	<u>111</u>	<u>107</u>	110	108			192	105	114	<u>105</u>	<u>113</u>		
638.imagick_s	288	<u>11.4</u>	<u>1270</u>	11.3	1270			384	10.8	1330	<u>10.8</u>	<u>1330</u>		
644.nab_s	288	12.1	1440	<u>12.2</u>	<u>1440</u>			288	12.1	1440	<u>12.2</u>	<u>1440</u>		
649.fotonik3d_s	288	39.2	233	<u>39.4</u>	<u>231</u>			288	39.3	232	<u>39.4</u>	<u>231</u>		
654.roms_s	288	<u>18.4</u>	<u>857</u>	17.8	884			384	13.3	1180	<u>13.3</u>	<u>1180</u>		

SPECSpeed®2017_fp_base = 520

SPECSpeed®2017_fp_peak = 570

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage, 'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017_fp_base = 520

SPECspeed®2017_fp_peak = 570

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Dec-2025
Software Availability: Dec-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-767"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "768"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY =
"0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187,192-203,208-219,224-235,240-251,256-267,272-283,288-299,304-315,320-331,336-347,352-363,368-379"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY =
"0,384,1,385,2,386,3,387,4,388,5,389,6,390,7,391,8,392,9,393,10,394,11,395,12,396,13,397,14,398,15,399,16,400,17,401,18,402,19,403,20,404,21,405,22,406,23,407,24,408,25,409,26,410,27,411,28,412,29,413,30,414,31,415,32,416,33,417,34,418,35,419,36,420,37,421,38,422,39,423,40,424,41,425,42,426,43,427,44,428,45,429,46,430,47,431,48,432,49,433,50,434,51,435,52,436,53,437,54,438,55,439,56,440,57,441,58,442,59,443,60,444,61,445,62,446,63,447,64,448,65,449,66,450,67,451,68,452,69,453,70,454,71,455,72,456,73,457,74,458,75,459,76,460,77,461,78,462,79,463,80,464,81,465,82,466,83,467,84,468,85,469,86,470,87,471,88,472,89,473,90,474,91,475,92,476,93,477,94,478,95,479"
```

Environment variables set by runcpu during the 627.cam4_s peak run:

```
GOMP_CPU_AFFINITY = "0-383"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 638.imagick_s peak run:

```
GOMP_CPU_AFFINITY = "0-383"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY =
"0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187,192-203,208-219,224-235,240-251,256-267,272-283,288-299,304-315,320-331,336-347,352-363,368-379"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0-383"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

Benchmark run from a 340 GB ramdisk created with the cmd: "mount -t tmpfs -o size=340G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Virtualization Technology : Disabled

System Profile : Custom

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017_fp_base = 520

SPECspeed®2017_fp_peak = 570

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

Platform Notes (Continued)

```

C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link Power Management : Disabled
Periodic Directory Rinse Tuning : Blended
Determinism Control : Manual
Determinism Slider : Power Determinism
Optimizer Mode : Enabled
Algorithm Performance Boost Disable : Enabled
ApbDis Fixed DF P-State : P0
Adaptive Allocation : Enabled
Dram Refresh Delay : Performance
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

```

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on STNT201-XE9785L Sun Feb 1 13:19:28 2026

```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- ```

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux STNT201-XE9785L 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux

2. w
 13:19:28 up 2:11, 1 user, load average: 6.37, 4.71, 2.79
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 11:11 2:05m 2.32s 0.90s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 12380911
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0

```

### 5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=6.4_T17 --output_format
html,pdf,txt
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.4_T17 --output_format html,pdf,txt fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.4_T17 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size
test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templates/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4

```

### 6. /proc/cpuinfo

```

model name : AMD EPYC 9965 192-Core Processor
vendor_id : AuthenticAMD
cpu family : 26
model : 17
stepping : 0
microcode : 0xb101054
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size : 192 4K pages
cpu cores : 192
siblings : 384
2 physical ids (chips)
768 processors (hardware threads)
physical id 0: core ids 0-191
physical id 1: core ids 0-191
physical id 0: apicids 0-383
physical id 1: apicids 512-895

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Dec-2025

## Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 768
On-line CPU(s) list: 0-767
Vendor ID: AuthenticAMD
BIOS Vendor ID: AMD
Model name: AMD EPYC 9965 192-Core Processor
BIOS Model name: AMD EPYC 9965 192-Core Processor CPU @ 2.2GHz
BIOS CPU family: 107
CPU family: 26
Model: 17
Thread(s) per core: 2
Core(s) per socket: 192
Socket(s): 2
Stepping: 0
Frequency boost: enabled
CPU(s) scaling MHz: 68%
CPU max MHz: 2250.0000
CPU min MHz: 1500.0000
BogoMIPS: 4493.99
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
 pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
 rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
 extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
 cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
 osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
 perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
 smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
 cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
 xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
 svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
 pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
 vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
 avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
 movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
 flush_lld debug_swap
L1d cache: 18 MiB (384 instances)
L1i cache: 12 MiB (384 instances)
L2 cache: 384 MiB (384 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-191,384-575
NUMA node1 CPU(s): 192-383,576-767
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Dec-2025

### Platform Notes (Continued)

|                                     |                                                                                                                                    |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Vulnerability Retbleed:             | Not affected                                                                                                                       |
| Vulnerability Spec rstack overflow: | Not affected                                                                                                                       |
| Vulnerability Spec store bypass:    | Mitigation; Speculative Store Bypass disabled via prctl                                                                            |
| Vulnerability Spectre v1:           | Mitigation; userscopy/swaps barriers and __user pointer sanitization                                                               |
| Vulnerability Spectre v2:           | Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected |
| Vulnerability Srbds:                | Not affected                                                                                                                       |
| Vulnerability Tsx async abort:      | Not affected                                                                                                                       |
| Vulnerability Vmscape:              | Not affected                                                                                                                       |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 18M      | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 12M      | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 384M     | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 768M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-191,384-575
node 0 size: 1547332 MB
node 0 free: 1484040 MB
node 1 cpus: 192-383,576-767
node 1 size: 1548036 MB
node 1 free: 1481256 MB
node distances:
node 0 1
 0: 10 32
 1: 32 10
```

9. /proc/meminfo

MemTotal: 3169656988 kB

10. who -r

run-level 5 Feb 1 11:11

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.10)

|                |          |
|----------------|----------|
| Default Target | Status   |
| graphical      | degraded |

12. Failed units, from systemctl list-units --state=failed

| UNIT                                   | LOAD   | ACTIVE | SUB    | DESCRIPTION                       |
|----------------------------------------|--------|--------|--------|-----------------------------------|
| * systemd-networkd-wait-online.service | loaded | failed | failed | Wait for Network to be Configured |

Legend: LOAD -> Reflects whether the unit definition was properly loaded.  
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.  
SUB -> The low-level unit activation state, values depend on unit type.

1 loaded units listed.

13. Services, from systemctl list-unit-files

| STATE   | UNIT FILES                                                                                                                                                                                                                                                     |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled | ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup containerd cron dmesg docker e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

### Platform Notes (Continued)

```

networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower
generated openipmi
indirect systemd-sysupdate systemd-sysupdate-reboot uidd
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

#### 14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=98480d81-2f92-410d-9531-7c738c09a797
ro
pci=realloc=off
amd_iommu=on
iommu=pt

```

#### 15. cpupower frequency-info

```

analyzing CPU 457:
 current policy: frequency should be within 1.50 GHz and 2.25 GHz.
 The governor "schedutil" may decide which speed to use
 within this range.

 boost state support:
 Supported: yes
 Active: yes
 Boost States: 0
 Total States: 3
 Pstate-P0: 2250MHz

```

#### 16. sysctl

```

kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Dec-2025

### Platform Notes (Continued)

17. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 24.04.3 LTS

20. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1.4  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 340G 3.3G 337G 1% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge XE9785L  
Product Family: PowerEdge  
Serial: STNT201

22. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
24x 80CE000080CE M321RAJA0MB2-CCPKC 128 GB 2 rank 6400

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.2.0  
BIOS Date: 11/06/2025  
BIOS Revision: 1.2

### Compiler Version Notes

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Dec-2025

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

=====  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

=====  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

```

Benchmarks using both Fortran and C:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -flto -mllvm -reduce-array-computations=3  
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2026

Hardware Availability: Dec-2025

Software Availability: Dec-2025

## Peak Optimization Flags (Continued)

649.fotonik3d\_s (continued):

-lamdalloc -lflang

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge XE9785L (AMD EPYC 9965 192-Core Processor)

SPECspeed®2017\_fp\_base = 520

SPECspeed®2017\_fp\_peak = 570

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2026

**Hardware Availability:** Dec-2025

**Software Availability:** Dec-2025

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-02-01 08:19:28-0500.

Report generated on 2026-02-25 10:34:55 by CPU2017 PDF formatter v6716.

Originally published on 2026-02-25.