



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573


Test Date: Mar-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2026

Tested by: Dell Inc.

Software Availability: Jun-2025

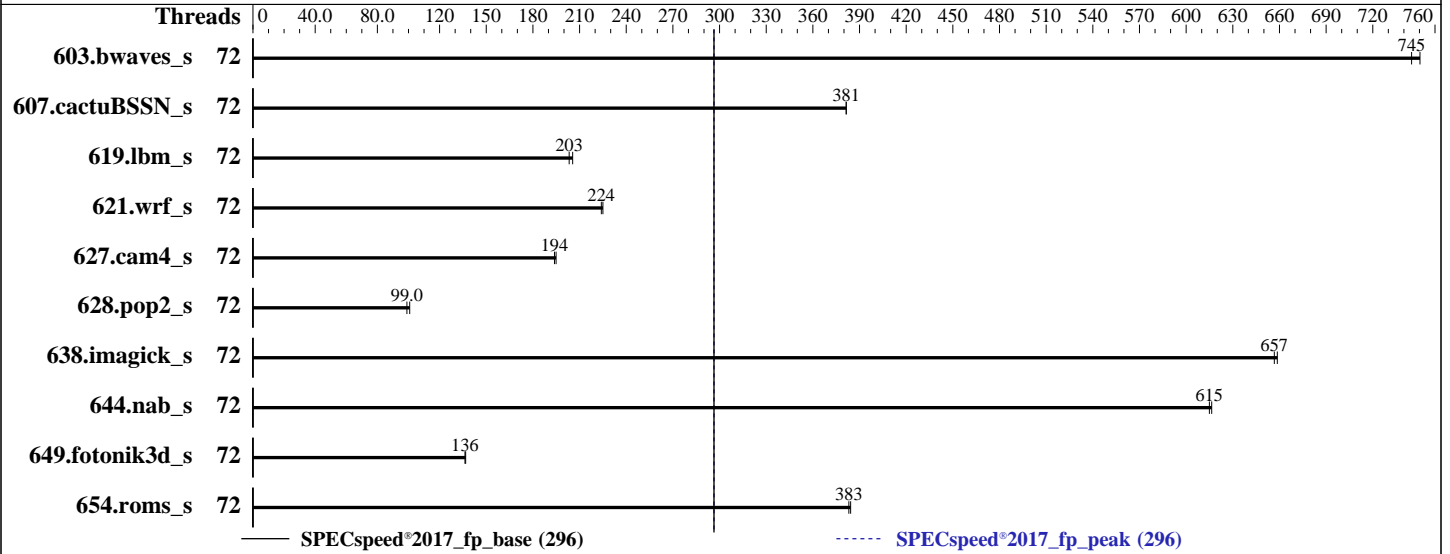

Hardware

CPU Name: Intel Xeon 6776P-B
 Max MHz: 3500
 Nominal: 2300
 Enabled: 72 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 288 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 60 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 10.0 (Coughlan)
 6.12.0-55.9.1.el10_0.x86_64
 Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 1.1.3 released Feb-2026
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECSpeed®2017_fp_peak = 296

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	72	78.6	750	<u>79.2</u>	<u>745</u>			72	78.6	750	<u>79.2</u>	<u>745</u>		
607.cactuBSSN_s	72	<u>43.7</u>	<u>381</u>	43.7	381			72	<u>43.7</u>	<u>381</u>	43.7	381		
619.lbm_s	72	<u>25.8</u>	<u>203</u>	25.5	206			72	<u>25.8</u>	<u>203</u>	25.5	206		
621.wrf_s	72	58.8	225	<u>59.0</u>	<u>224</u>			72	58.8	225	<u>59.0</u>	<u>224</u>		
627.cam4_s	72	45.5	195	<u>45.7</u>	<u>194</u>			72	45.5	195	<u>45.7</u>	<u>194</u>		
628.pop2_s	72	<u>120</u>	<u>99.0</u>	118	101			72	<u>120</u>	<u>99.0</u>	118	101		
638.imagick_s	72	21.9	659	<u>22.0</u>	<u>657</u>			72	21.9	659	<u>22.0</u>	<u>657</u>		
644.nab_s	72	<u>28.4</u>	<u>615</u>	28.3	616			72	<u>28.4</u>	<u>615</u>	28.3	616		
649.fotonik3d_s	72	<u>66.9</u>	<u>136</u>	66.7	137			72	<u>66.9</u>	<u>136</u>	66.7	137		
654.roms_s	72	<u>41.1</u>	<u>383</u>	41.0	384			72	<u>41.1</u>	<u>383</u>	41.0	384		

SPECSpeed®2017_fp_base = 296

SPECSpeed®2017_fp_peak = 296

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2025.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:
Logical Processor : Disabled
Sub NUMA Cluster : Enabled
LLC Prefetch : Enabled

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

System Profile : Custom
CPU Power Management : Maximum Performance
Memory Patrol Scrub : Disabled
Latency Optimized Mode : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2025.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on P404206-XR8720t Mon Mar 2 11:06:24 2026

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux P404206-XR8720t 6.12.0-55.9.1.el10_0.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Mar 25 09:14:09 EDT 2025
x86_64 GNU/Linux

2. w
11:06:24 up 2:27, 2 users, load average: 5.91, 5.50, 3.25
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 09:17 14:54 0.04s 0.04s -bash
root 09:17 2:27m 0.00s 0.07s /usr/lib/systemd/systemd --user

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2059727
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2059727
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=47 rhgb
/usr/sbin/crond -n
/usr/sbin/CROND -n
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-crontab-run.sh dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/dell-batch.sh
/bin/bash /home/DellFiles/bin/CPU_speed.sh
/bin/bash /home/DellFiles/bin/cpu-run-main.sh speed
/bin/bash /home/DellFiles/bin/cpu-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/cpu-run-speccpu.sh speed_all --define DL-VERS=7.0_T06 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/cpu-run-speccpu.sh speed_all --define DL-VERS=7.0_T06 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=72 --tune base,peak -o all --define
drop_caches --iterations 2 --define DL-VERS=7.0_T06 --output_format html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2025.2-linux64-graniterapids-speed-20250605.cfg --define cores=72 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-VERS=7.0_T06 --output_format html,pdf,txt --nopower
--runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templots/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2025.2

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) 6776P-B
vendor_id      : GenuineIntel
cpu family     : 6
model          : 174
stepping      : 1
microcode     : 0x1000303
bugs          : spectre_v1 spectre_v2 spec_store_bypass swaps bhi
cpu cores     : 72
siblings      : 72
1 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-35,64-99
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,12
8,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

,182,184,186,188,190,192,194,196,198

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.2:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       72
On-line CPU(s) list:         0-71
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel
Model name:                   INTEL(R) XEON(R) 6776P-B
BIOS Model name:             INTEL(R) XEON(R) 6776P-B CPU @ 2.3GHz
BIOS CPU family:             179
CPU family:                   6
Model:                        174
Thread(s) per core:          1
Core(s) per socket:          72
Socket(s):                    1
Stepping:                     1
BogoMIPS:                     4600.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                              pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                              pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                              nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                              pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                              xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                              tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                              3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                              ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                              vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                              rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                              intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                              xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                              split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                              arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                              vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                              bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                              serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                              amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   3.4 MiB (72 instances)
L1i cache:                   4.5 MiB (72 instances)
L2 cache:                     144 MiB (72 instances)
L3 cache:                     288 MiB (1 instance)
NUMA node(s):                 2
NUMA node0 CPU(s):           0-35
NUMA node1 CPU(s):           36-71
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
 Vulnerability Spec rstack overflow: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	64K	4.5M	16	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	288M	288M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-35
node 0 size: 257168 MB
node 0 free: 243232 MB
node 1 cpus: 36-71
node 1 size: 257985 MB
node 1 free: 256609 MB
node distances:
node    0   1
 0:    10  12
 1:    12  10
```

9. /proc/meminfo

MemTotal: 527517240 kB

10. who -r

run-level 3 Mar 2 08:39

11. Systemd service manager version: systemd 257 (257-9.el10_0.1-g8cd5633)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd audit-rules auditd avahi-daemon bluetooth chronyd crond cups
dbus-broker fips-crypto-policy-overlay firewalld gdm getty@ insights-client-boot
irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt lvm2-monitor mcelog mdmonitor
multipathd nvme-fc-boot-connections qemu-guest-agent rhsmcertd rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd switcheroo-control systemd-confext
systemd-network-generator systemd-pstore systemd-sysext tuned tuned-ppd udisks2 upower
vgauthd vmttoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cups-browsed
dbus-daemon debug-shell dnf-system-upgrade dnsmasq gnome-remote-desktop
gnome-remote-desktop-configuration hypervfcopyd iscsi-init iscsid iscsiui kpatch kvm_stat
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

indirect
ledmon low-memory-monitor lvm-devices-import man-db-restart-cache-update microcode
netavark-dhcp-proxy netavark-firewalld-reload nftables nis-domainname nvmmf-autoconnect
podman podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct
ras-mc-ctl rasdaemon rhsm rhsm-facts rpmdb-migrate rpmdb-rebuild
selinux-check-proper-disable serial-getty@ speech-dispatcherd ssh-host-keys-migration
sshd-keygen@ systemd-boot-check-no-failures systemd-boot-update
systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config
systemd-PCRlock-machine-id systemd-PCRlock-make-policy
systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy
systemd-udev-load-credentials wpa_supplicant wsdd yggdrasil yggdrasil@
iscsi pcsd spice-vdagentd sshd@ sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
sssd-sudo systemd-sysupdate systemd-sysupdate-reboot systemd-userdbd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-6.12.0-55.9.1.el10_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=2G-64G:256M,64G-:512M
resume=UUID=94aa4dd4-b04d-42c5-9ac2-da9c96f84f4e
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 67:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
No current active profile.

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvice [madvice] never
   enabled         [always] madvice never
   hpage_pmd_size 2097152
   shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 10.0 (Coughlan)
   redhat-release  Red Hat Enterprise Linux release 10.0 (Coughlan)
   system-release  Red Hat Enterprise Linux release 10.0 (Coughlan)

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2025.2
  filesystem  Type  Size  Used Avail Use% Mounted on
  tmpfs       tmpfs  60G  5.8G  55G  10% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:      Dell Inc.
   Product:     PowerEdge XR8720t
   Product Family: PowerEdge
   Serial:     P404206

```

```

-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x 00CE063200CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      Dell Inc.
  BIOS Version:     1.1.3
  BIOS Date:        02/03/2026
  BIOS Revision:    1.1

```

Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECSpeed®2017_fp_peak = 296

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Base Portability Flags (Continued)

```
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 296

PowerEdge XR8720t (Intel Xeon 6776P-B)

SPECspeed®2017_fp_peak = 296

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.19.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-02 12:06:23-0500.

Report generated on 2026-03-25 10:08:01 by CPU2017 PDF formatter v6716.

Originally published on 2026-03-24.