



SPEC CPU®2017 Floating Point Speed Result


Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

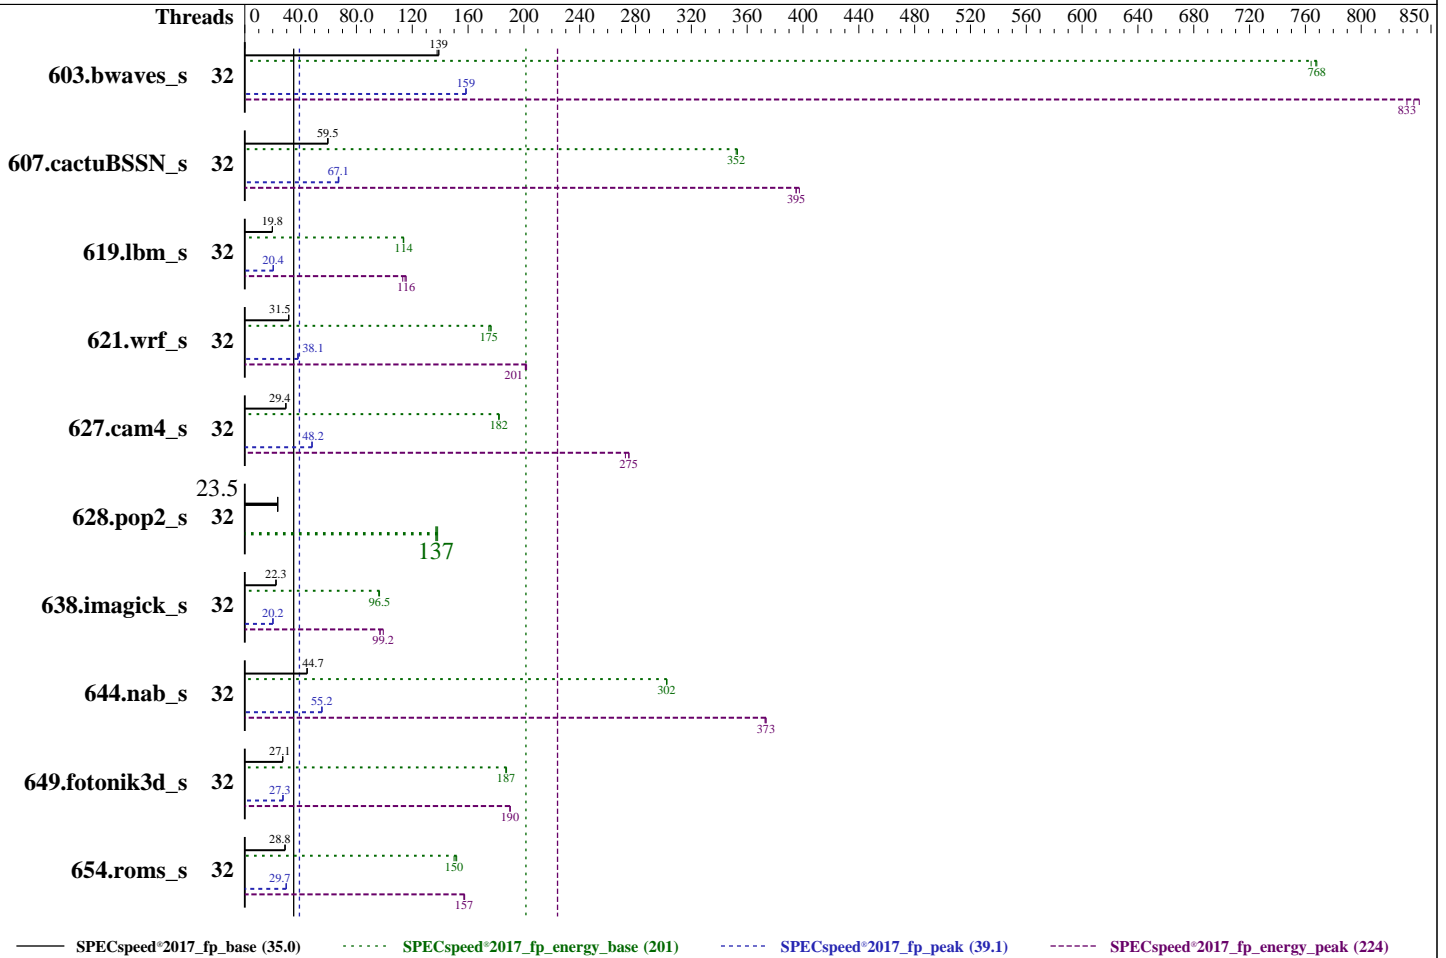

Hardware

CPU Name: Ampere eMAG 8180
Max MHz: 3300
Nominal: 3000
Enabled: 32 cores, 1 chip
Orderable: 1 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 4 MB I+D on chip per chip (256 KiB shared / 2 cores)
L3: 32 MB I+D on chip per chip
Other: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)
Compiler: C/C++/Fortran: Version 15.2.0 of GCC
Parallel: Yes
Firmware: Version 1.12 released Nov-2019
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc v5.3+, commit hash 1972241
Power Management: OS CPU governor set to "performance"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Power

Max. Power (W): 289.13
Idle Power (W): 75.62
Min. Temperature (C): 21.00
Elevation (m): 60
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire
Provisioning: Line powered

Power Settings

Management FW: Version 11.05.111 of Falcon BMC
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply
Backplane: N/A
Other Storage: N/A
Storage Model #s: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 1 Gbps
Other HW Model #s: --

Power Analyzer

Power Analyzer: cpu-reference-ptd:8000
Hardware Vendor: Yokogawa
Model: YokogawaWT310E
Serial Number: T11733385
Input Connection: Serial over USB
Metrology Institute: NIST
Calibration By: Yokogawa USA
Calibration Label: T126622
Calibration Date: 18-Aug-2025
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: Directly connected
Current Ranges Used: 5A
Voltage Range Used: 150V

Temperature Meter

Temperature Meter: cpu-reference-ptd:9000
Hardware Vendor: PCSensor
Model: USB9097+DS18B20
Serial Number: --
Input Connection: USB
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)
Setup Description: In front of SUT front panel primary air inlet

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	32	428	138	84.2	764	197	227	425	139	83.8	768	197	232	424	139	83.9	767	198	232
607.cactuBSSN_s	32	280	59.6	51.7	353	185	206	281	59.4	51.7	353	184	204	280	59.5	51.8	352	185	207
619.lbm_s	32	264	19.8	52.3	114	198	219	266	19.7	52.4	114	197	219	265	19.8	52.2	114	197	219
621.wrf_s	32	421	31.4	81.8	177	194	217	419	31.5	82.1	176	196	218	420	31.5	82.6	175	197	226
627.cam4_s	32	301	29.4	53.0	182	176	205	301	29.4	52.9	182	176	203	302	29.4	53.0	182	176	205
628.pop2_s	32	505	23.5	95.1	137	189	213	502	23.6	94.4	138	188	207	504	23.5	95.3	137	189	208
638.imagick_s	32	645	22.4	164	96.1	254	286	646	22.3	163	96.5	252	286	646	22.3	164	96.1	253	286
644.nab_s	32	391	44.6	62.9	302	161	177	391	44.7	62.9	302	161	176	391	44.7	62.9	302	161	176
649.fotonik3d_s	32	336	27.1	54.7	187	163	180	337	27.1	54.7	187	162	179	335	27.2	54.6	188	163	180
654.roms_s	32	545	28.9	116	152	213	255	546	28.8	116	151	213	253	546	28.8	117	150	215	254

SPECspeed®2017_fp_base = 35.0

SPECspeed®2017_fp_energy_base = 201

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	32	372	159	76.5	842	206	237	372	159	77.3	833	208	244	373	158	76.8	838	206	243
607.cactuBSSN_s	32	249	67.0	46.2	395	186	202	249	67.1	46.2	395	186	203	247	67.4	45.9	397	186	203
619.lbm_s	32	257	20.4	51.8	115	202	223	257	20.4	52.6	113	205	228	257	20.4	51.4	116	200	223
621.wrf_s	32	346	38.3	71.5	202	207	245	348	38.0	71.9	201	207	257	347	38.1	71.8	201	207	240
627.cam4_s	32	184	48.3	35.0	275	191	226	184	48.1	35.4	273	192	227	184	48.2	35.1	275	190	226
628.pop2_s	32	505	23.5	95.1	137	189	213	502	23.6	94.4	138	188	207	504	23.5	95.3	137	189	208
638.imagick_s	32	716	20.1	162	96.9	227	288	716	20.2	158	99.2	221	289	715	20.2	162	96.9	227	289
644.nab_s	32	317	55.2	51.0	373	161	174	316	55.3	50.9	373	161	174	316	55.2	50.9	373	161	173
649.fotonik3d_s	32	333	27.4	53.8	190	162	178	334	27.3	53.9	190	161	178	334	27.3	53.9	190	161	178
654.roms_s	32	531	29.7	112	157	211	269	530	29.7	112	157	212	268	531	29.7	112	158	210	271

SPECspeed®2017_fp_peak = **39.1**

SPECspeed®2017_fp_energy_peak = **224**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/usr/lib64:/usr/lib:/lib64:/home/mjm/jemalloc/lib"
OMP_STACKSIZE = "120M"

General Notes

607.cactuBSSN_s (peak): "snprintf" src.alt was used.

607.cactuBSSN_s (base): "snprintf" src.alt was used.

jemalloc is a general purpose malloc(3) implementation that emphasizes fragmentation avoidance and scalable concurrency support.
sources available from <https://github.com/facebook/jemalloc/tree/1972241>
and built via ".configure --with-lg-quantum=3" which used system gcc-14 -O3

This benchmark result is intended to provide perspective on past power and/or performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

Sysinfo program /home/mjm/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

running on emag Wed Mar 4 07:35:37 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

```
1. uname -a
Linux emag 6.8.0 #1 SMP PREEMPT_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64 aarch64 aarch64 GNU/Linux
```

```
2. w
07:35:37 up 75 days, 8:00, 2 users, load average: 1.08, 4.50, 3.69
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
mjm                10.13.114.186 28Jan26    4days    0.00s    0.02s  sshd: mjm [priv]
```

```
3. Username
From environment variable $USER: mjm
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 16691648
process            128681
nofiles            1024
vmemory(kbytes)   unlimited
locks              unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECSpeed®2017_fp_base = 35.0
SPECSpeed®2017_fp_energy_base = 201
SPECSpeed®2017_fp_peak = 39.1
SPECSpeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

rtprio 0

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --system --deserialize=66
SCREEN
-bin/tcsh
runcpu --flagsurl=$SPEC/gcc.2024-08-14.xml --reportable -c emag-03-gcc15 --tune=base,peak -n 3 --threads 32
fpspeed
runcpu --flagsurl $SPEC/gcc.2024-08-14.xml --reportable --configfile emag-03-gcc15 --tune base,peak
--iterations 3 --threads 32 --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.098/templogs/preenv.fpspeed.098.0.log --lognum 098.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo -f
$SPEC = /home/mjm/cpu2017
-----
```

```
-----
6. /proc/cpuinfo
CPU implementer : 0x50
CPU architecture: 8
CPU variant : 0x3
CPU part : 0x000
CPU revision : 2
Features : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
-----
```

7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture: aarch64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: APM
Model name: -
Model: 2
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 1
Stepping: 0x3
Frequency boost: disabled
CPU(s) scaling MHz: 100%
CPU max MHz: 2911.7639
CPU min MHz: 363.9700
BogoMIPS: 80.00
Flags: fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 4 MiB (16 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Mitigation; PTI
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECSpeed®2017_fp_base = 35.0
SPECSpeed®2017_fp_energy_base = 201
SPECSpeed®2017_fp_peak = 39.1
SPECSpeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Vulnerable
Vulnerability Spectre v1: Mitigation; __user pointer sanitization
Vulnerability Spectre v2: Vulnerable
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K		1M	8 Data	1			
L1i	32K		1M	8 Instruction	1			
L2	256K		4M	32 Unified	2			

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 130403 MB
node 0 free: 68466 MB
node distances:
node 0
0: 10

9. /proc/meminfo

MemTotal: 133533376 kB

10. who -r

run-level 5 Dec 18 23:35

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysextr systemd-time-wait-sync
generated	openipmi perlbld
indirect	serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uuid

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0
root=UUID=16268541-06d0-4374-97ca-2d512d4db26f
ro
cma=1024M
iommu.passthrough=1
```

14. sysctl

```
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0
```

15. /sys/kernel/mm/transparent_hugepage

```
defrag always defer defer+madvice [madvice] never
enabled always [madvice] never
hpage_pmd_size 536870912
shmem_enabled always within_size advise [never] deny force
```

16. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 8191
max_ptes_shared 4096
max_ptes_swap 1024
pages_to_scan 65536
scan_sleep_millisecs 10000
```

17. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS
```

18. Disk information

```
SPEC is set to: /home/mjm/cpu2017
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECSpeed®2017_fp_base = 35.0
SPECSpeed®2017_fp_energy_base = 201
SPECSpeed®2017_fp_peak = 39.1
SPECSpeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	317G	99G	77%	/

```
-----
19. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     HR330A          7X33CTO1WW
Product Family: Lenovo ThinkSystem HR330A/HR350A
-----
```

```
-----
20. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667
-----
```

```
-----
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      LENOVO
BIOS Version:     HVE104N-1.12
BIOS Date:        11/29/2019
BIOS Revision:    1.12
Firmware Revision: 1.7
-----
```

Power Settings Notes

OS CPU governor was set using the command:
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Compiler Version Notes (Continued)

GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Base Compiler Invocation

C benchmarks:
gcc

Fortran benchmarks:
gfortran

Benchmarks using both Fortran and C:
gfortran gcc

Benchmarks using Fortran, C, and C++:
g++ gcc gfortran

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Base Portability Flags (Continued)

619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-mabi=lp64 -std=c99 -g -O3 -mcpu=native -flto=16
-fno-strict-aliasing -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

Fortran benchmarks:

-mabi=lp64 -g -O3 -mcpu=native -flto=16 -DSPEC_OPENMP -fopenmp
-L/home/mjm/jemalloc/lib -ljemalloc

Benchmarks using both Fortran and C:

-mabi=lp64 -std=c99 -g -O3 -mcpu=native -flto=16
-fno-strict-aliasing -DSPEC_OPENMP -fopenmp -L/home/mjm/jemalloc/lib
-ljemalloc

Benchmarks using Fortran, C, and C++:

-mabi=lp64 -std=c++03 -std=c99 -g -O3 -mcpu=native -flto=16
-fno-strict-aliasing -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

Base Other Flags

C benchmarks:

-Wno-error=implicit-int

Fortran benchmarks:

-fallow-argument-mismatch

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECSpeed®2017_fp_base = 35.0
SPECSpeed®2017_fp_energy_base = 201
SPECSpeed®2017_fp_peak = 39.1
SPECSpeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
-Wno-error=implicit-int -fallow-argument-mismatch

Benchmarks using Fortran, C, and C++:
-Wno-error=implicit-int -fallow-argument-mismatch

Peak Compiler Invocation

C benchmarks:
gcc

Fortran benchmarks:
gfortran

Benchmarks using both Fortran and C:
gfortran gcc

Benchmarks using Fortran, C, and C++:
g++ gcc gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g -Ofast
-mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP -L/home/mjm/jemalloc/lib
-ljemalloc

Fortran benchmarks:
-mabi=lp64 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native
-flto=16 -DSPEC_OPENMP -fopenmp -L/home/mjm/jemalloc/lib -ljemalloc

Benchmarks using both Fortran and C:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology
(Test Sponsor: Ampere Computing, Inc.)
ThinkSystem HR330A
(3.00 GHz Ampere eMAG 8180)

SPECspeed®2017_fp_base = 35.0
SPECspeed®2017_fp_energy_base = 201
SPECspeed®2017_fp_peak = 39.1
SPECspeed®2017_fp_energy_peak = 224

CPU2017 License: 6412
Test Sponsor: Ampere Computing, Inc.
Tested by: Ampere Computing, Inc.

Test Date: Mar-2026
Hardware Availability: Apr-2019
Software Availability: Aug-2025

Peak Optimization Flags (Continued)

```
621.wrf_s: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -DSPEC_OPENMP -fopenmp
-L/home/mjm/jemalloc/lib -ljemalloc
```

```
627.cam4_s: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing
-DSPEC_OPENMP -fopenmp -L/home/mjm/jemalloc/lib
-ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
-mabi=lp64 -std=c++03 -std=c99 -fprofile-generate -fprofile-use -g
-Ofast -mcpu=native -flto=16 -fopenmp -DSPEC_OPENMP
-L/home/mjm/jemalloc/lib -ljemalloc
```

Peak Other Flags

Benchmarks using both Fortran and C (except as noted below):

```
-Wno-error=implicit-int -fallow-argument-mismatch
```

```
621.wrf_s: -fallow-argument-mismatch
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.xml>

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-04 02:35:35-0500.
Report generated on 2026-04-28 13:16:51 by CPU2017 PDF formatter v6716.
Originally published on 2026-04-28.