



# SPEC CPU®2017 Floating Point Rate Result


Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

CPU2017 License: 6412  
Test Sponsor: Ampere Computing, Inc.  
Tested by: Ampere Computing, Inc.

Test Date: Feb-2026  
Hardware Availability: Apr-2019  
Software Availability: Aug-2025

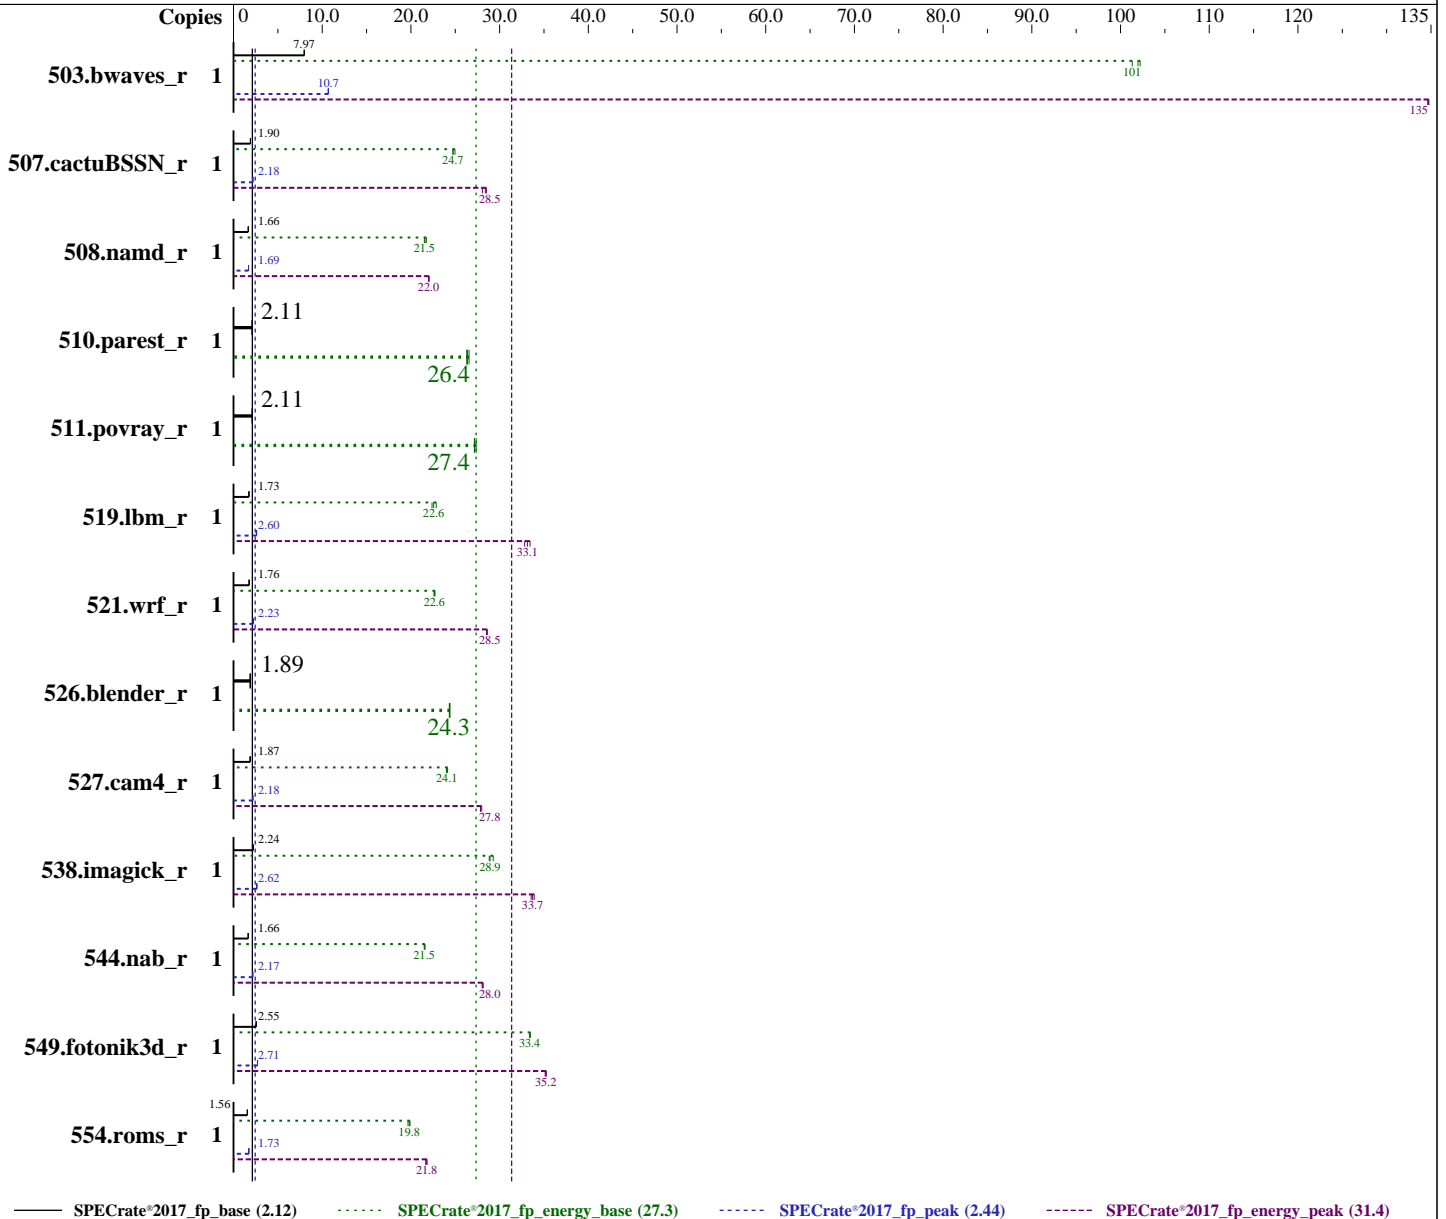

### Hardware

CPU Name: Ampere eMAG 8180  
Max MHz: 3300  
Nominal: 3000  
Enabled: 32 cores, 1 chip  
Orderable: 1 chips

(Continued on next page)

### Software

OS: Ubuntu 24.04.1 LTS kernel 6.8.0 (64KB pages)  
Compiler: C/C++/Fortran: Version 15.2.0 of GCC  
Parallel: No  
Firmware: Version 1.12 released Nov-2019  
File System: ext4

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

### Hardware (Continued)

Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 4 MB I+D on chip per chip (256 KiB shared / 2 cores)  
L3: 32 MB I+D on chip per chip  
Other: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 480 GB SATA SSD  
Other: CPU Cooling: Air

### Software (Continued)

System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc v5.3+, commit hash 1972241  
Power Management: OS CPU governor set to "performance"

### Power

Max. Power (W): 95.83  
Idle Power (W): 75.38  
Min. Temperature (C): 20.81  
Elevation (m): 60  
Line Standard: 120 V / 60 Hz / 1 phase / 2 wire  
Provisioning: Line powered

### Power Settings

Management FW: Version 11.05.111 of Falcon BMC  
Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 1 x 550 W (non-redundant)  
Details: Lenovo 03LD785 550 Watt High Efficiency Platinum AC Power Supply  
Backplane: N/A  
Other Storage: N/A  
Storage Model #s: 1 x Lenovo 01PE965 (480GB SATA SSD) connected to on-board HBA  
NICs Installed: 1 x Lenovo 01PE857 @ 10 GbE (2 ports ethernet)  
NICs Enabled (FW/OS): 2 / 1  
NICs Connected/Speed: 1 @ 1 Gbps  
Other HW Model #s: --

### Power Analyzer

Power Analyzer: cpu-reference-ptd:8000  
Hardware Vendor: Yokogawa  
Model: YokogawaWT310E  
Serial Number: T11733385  
Input Connection: Serial over USB  
Metrology Institute: NIST  
Calibration By: Yokogawa USA  
Calibration Label: T126622  
Calibration Date: 18-Aug-2025  
PTDaemon® Version: 1.11.3 (0c074d7d; 2025-10-15)  
Setup Description: Directly connected  
Current Ranges Used: 5A  
Voltage Range Used: 150V

### Temperature Meter

Temperature Meter: cpu-reference-ptd:9000  
Hardware Vendor: PCSensor  
Model: USB9097+DS18B20  
Serial Number: --  
Input Connection: USB  
PTDaemon Version: 1.11.3 (0c074d7d; 2025-10-15)  
Setup Description: In front of SUT front panel primary air inlet

## Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
-----------	--------	---------	-------	-------------	--------------	---------------	---------------	---------	-------	-------------	--------------	---------------	---------------	---------	-------	-------------	--------------	---------------	---------------

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Base Results Table (Continued)

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
503.bwaves_r	1	1254	8.00	107	102	85.3	89.8	1259	7.96	107	102	85.1	88.4	<b>1258</b>	<b>7.97</b>	<b>108</b>	<b>101</b>	<b>85.7</b>	<b>89.1</b>
507.cactuBSSN_r	1	665	1.90	55.7	25.0	83.9	89.0	<b>665</b>	<b>1.90</b>	<b>56.3</b>	<b>24.7</b>	<b>84.6</b>	<b>86.5</b>	663	1.91	56.2	24.8	84.7	86.5
508.namd_r	1	571	1.66	47.6	21.7	83.5	87.3	<b>571</b>	<b>1.66</b>	<b>48.1</b>	<b>21.5</b>	<b>84.3</b>	<b>88.0</b>	571	1.66	48.0	21.6	84.1	87.0
510.parest_r	1	1239	2.11	107	26.6	86.6	88.5	1241	2.11	108	26.3	87.3	89.7	<b>1239</b>	<b>2.11</b>	<b>108</b>	<b>26.4</b>	<b>87.1</b>	<b>89.2</b>
511.povray_r	1	<b>1104</b>	<b>2.11</b>	<b>92.6</b>	<b>27.4</b>	<b>83.9</b>	<b>86.8</b>	1104	2.11	93.3	27.2	84.5	87.5	1104	2.12	93.2	27.2	84.5	88.0
519.lbm_r	1	604	1.74	52.4	22.9	86.7	89.4	608	1.73	53.5	22.4	88.0	90.8	<b>608</b>	<b>1.73</b>	<b>53.1</b>	<b>22.6</b>	<b>87.4</b>	<b>90.3</b>
521.wrf_r	1	1274	1.76	108	22.7	84.5	87.1	1273	1.76	108	22.6	85.0	87.7	<b>1273</b>	<b>1.76</b>	<b>108</b>	<b>22.6</b>	<b>84.8</b>	<b>89.3</b>
526.blender_r	1	807	1.89	67.6	24.4	83.7	92.4	807	1.89	67.7	24.3	83.9	91.3	<b>807</b>	<b>1.89</b>	<b>67.8</b>	<b>24.3</b>	<b>84.0</b>	<b>92.1</b>
527.cam4_r	1	934	1.87	78.9	24.1	84.5	90.3	932	1.88	79.3	24.0	85.0	87.8	<b>933</b>	<b>1.87</b>	<b>79.2</b>	<b>24.1</b>	<b>84.9</b>	<b>88.0</b>
538.imagick_r	1	1112	2.24	92.0	29.3	82.8	90.7	1112	2.24	93.4	28.8	84.0	86.3	<b>1112</b>	<b>2.24</b>	<b>93.1</b>	<b>28.9</b>	<b>83.8</b>	<b>87.3</b>
544.nab_r	1	1016	1.66	84.6	21.6	83.3	86.0	<b>1016</b>	<b>1.66</b>	<b>84.9</b>	<b>21.5</b>	<b>83.5</b>	<b>87.5</b>	1016	1.66	84.6	21.6	83.2	87.8
549.fotonik3d_r	1	<b>1528</b>	<b>2.55</b>	<b>130</b>	<b>33.4</b>	<b>85.1</b>	<b>87.3</b>	1528	2.55	130	33.4	85.0	89.0	1528	2.55	130	33.5	84.9	87.7
554.roms_r	1	1018	1.56	88.1	19.9	86.5	89.0	1020	1.56	89.1	19.7	87.3	89.8	<b>1019</b>	<b>1.56</b>	<b>88.4</b>	<b>19.8</b>	<b>86.8</b>	<b>90.5</b>

SPECrate®2017\_fp\_base = 2.12

SPECrate®2017\_fp\_energy\_base = 27.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
503.bwaves_r	1	939	10.7	81.1	135	86.4	88.3	<b>938</b>	<b>10.7</b>	<b>81.1</b>	<b>135</b>	<b>86.5</b>	<b>89.0</b>	937	10.7	81.2	135	86.7	93.8
507.cactuBSSN_r	1	<b>579</b>	<b>2.18</b>	<b>48.8</b>	<b>28.5</b>	<b>84.2</b>	<b>86.2</b>	587	2.16	49.5	28.1	84.4	94.4	578	2.19	49.0	28.4	84.7	87.5
508.namd_r	1	562	1.69	47.1	22.0	83.9	87.4	562	1.69	46.9	22.1	83.6	89.5	<b>562</b>	<b>1.69</b>	<b>47.1</b>	<b>22.0</b>	<b>83.8</b>	<b>87.5</b>
510.parest_r	1	1239	2.11	107	26.6	86.6	88.5	1241	2.11	108	26.3	87.3	89.7	<b>1239</b>	<b>2.11</b>	<b>108</b>	<b>26.4</b>	<b>87.1</b>	<b>89.2</b>
511.povray_r	1	<b>1104</b>	<b>2.11</b>	<b>92.6</b>	<b>27.4</b>	<b>83.9</b>	<b>86.8</b>	1104	2.11	93.3	27.2	84.5	87.5	1104	2.12	93.2	27.2	84.5	88.0
519.lbm_r	1	<b>405</b>	<b>2.60</b>	<b>36.1</b>	<b>33.1</b>	<b>89.1</b>	<b>91.8</b>	410	2.57	36.5	32.8	88.9	91.8	405	2.60	35.8	33.4	88.5	91.2
521.wrf_r	1	<b>1004</b>	<b>2.23</b>	<b>85.7</b>	<b>28.5</b>	<b>85.4</b>	<b>88.1</b>	1004	2.23	85.6	28.6	85.2	87.5	1006	2.23	85.5	28.6	85.0	87.0
526.blender_r	1	807	1.89	67.6	24.4	83.7	92.4	807	1.89	67.7	24.3	83.9	91.3	<b>807</b>	<b>1.89</b>	<b>67.8</b>	<b>24.3</b>	<b>84.0</b>	<b>92.1</b>
527.cam4_r	1	802	2.18	68.4	27.9	85.3	88.5	<b>803</b>	<b>2.18</b>	<b>68.4</b>	<b>27.8</b>	<b>85.2</b>	<b>88.0</b>	803	2.18	68.1	28.0	84.7	87.4
538.imagick_r	1	947	2.63	79.5	33.9	83.9	86.0	949	2.62	80.3	33.6	84.5	87.1	<b>949</b>	<b>2.62</b>	<b>79.9</b>	<b>33.7</b>	<b>84.1</b>	<b>88.1</b>
544.nab_r	1	777	2.17	64.9	28.1	83.5	85.9	777	2.17	64.9	28.1	83.5	85.4	<b>777</b>	<b>2.17</b>	<b>65.1</b>	<b>28.0</b>	<b>83.8</b>	<b>87.5</b>
549.fotonik3d_r	1	1441	2.70	124	35.1	85.8	87.7	<b>1440</b>	<b>2.71</b>	<b>123</b>	<b>35.2</b>	<b>85.6</b>	<b>89.8</b>	1439	2.71	123	35.3	85.6	87.8
554.roms_r	1	<b>921</b>	<b>1.73</b>	<b>80.5</b>	<b>21.8</b>	<b>87.4</b>	<b>89.9</b>	917	1.73	80.4	21.8	87.6	90.2	923	1.72	80.9	21.7	87.6	90.3

SPECrate®2017\_fp\_peak = 2.44

SPECrate®2017\_fp\_energy\_peak = 31.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/lib64:/usr/lib:/lib64:/home/mjm/jemalloc/lib"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## General Notes

507.cactuBSSN\_r (peak): "snprintf" src.alt was used.

507.cactuBSSN\_r (base): "snprintf" src.alt was used.

jemalloc is a general purpose malloc(3) implementation that emphasizes fragmentation avoidance and scalable concurrency support. sources available from <https://github.com/facebook/jemalloc/tree/1972241> and built via `./configure --with-lg-quantum=3` which used system gcc-14 -O3

This benchmark result is intended to provide perspective on past power and/or performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

Sysinfo program /home/mjm/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on emag Sat Feb 28 08:48:05 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

21. BIOS

1. `uname -a`  
Linux emag 6.8.0 #1 SMP PREEMPT\_DYNAMIC Fri Feb 28 00:25:30 UTC 2025 aarch64 aarch64 aarch64 GNU/Linux

2. `w`  
08:48:05 up 71 days, 9:13, 2 users, load average: 3.41, 19.65, 27.10  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
mjm 10.13.114.186 28Jan26 1:51m 0.00s 0.02s sshd: mjm [priv]

3. Username  
From environment variable \$USER: mjm

4. `ulimit -a`  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 16691648  
process 128681  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd --system --deserialize=66  
SCREEN  
-bin/tcsh  
runcpu --flagsurl=\$SPEC/gcc.2024-08-14.xml --reportable -c emag-03-gcc15 --tune=base,peak -n 3 -C 1 fprate  
runcpu --flagsurl \$SPEC/gcc.2024-08-14.xml --reportable --configfile emag-03-gcc15 --tune base,peak  
--iterations 3 --copies 1 --runmode rate --tune base:peak --size reframe fprate --nopreenv --note-preenv  
--logfile \$SPEC/tmp/CPU2017.094/templogs/preenv.fprate.094.0.log --lognum 094.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo -f  
\$SPEC = /home/mjm/cpu2017

6. `/proc/cpuinfo`  
CPU implementer : 0x50  
CPU architecture: 8  
CPU variant : 0x3  
CPU part : 0x000  
CPU revision : 2  
Features : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid

7. `lscpu`  
From lscpu from util-linux 2.39.3:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12

SPECrate®2017\_fp\_energy\_base = 27.3

SPECrate®2017\_fp\_peak = 2.44

SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412

**Test Sponsor:** Ampere Computing, Inc.

**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026

**Hardware Availability:** Apr-2019

**Software Availability:** Aug-2025

## Platform Notes (Continued)

```

Architecture:          aarch64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             APM
Model name:            -
Model:                 2
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):             1
Stepping:              0x3
Frequency boost:       disabled
CPU(s) scaling MHz:    100%
CPU max MHz:           2911.7639
CPU min MHz:           363.9700
BogoMIPS:              80.00
Flags:                 fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
L1d cache:             1 MiB (32 instances)
L1i cache:             1 MiB (32 instances)
L2 cache:              4 MiB (16 instances)
NUMA node(s):         1
NUMA node0 CPU(s):    0-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Mitigation; PTI
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Vulnerable
Vulnerability Spectre v1:         Mitigation; __user pointer sanitization
Vulnerability Spectre v2:         Vulnerable
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:    Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d   32K      1M      1M   8 Data          1
L1i   32K      1M      1M   8 Instruction   1
L2    256K     4M      32M  32 Unified      2

```

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-31
node 0 size: 130403 MB
node 0 free: 92927 MB
node distances:
node 0
0: 10

```

```

9. /proc/meminfo
MemTotal:      133533376 kB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

-----  
10. who -r  
run-level 5 Dec 18 23:35  
-----

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)  
Default Target Status  
graphical running  
-----

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub\_reap finalrd getty@ grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate power-profiles-daemon rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth  
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs  
disabled console-getty debug-shell ipmievd iscsid nftables rsync ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysexit systemd-time-wait-sync  
generated openipmi perlbal  
indirect serial-getty@ systemd-sysupdate systemd-sysupdate-reboot uidd  
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common  
-----

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0  
root=UUID=16268541-06d0-4374-97ca-2d512d4db26f  
ro  
cma=1024M  
iommu.passthrough=1  
-----

14. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12

SPECrate®2017\_fp\_energy\_base = 27.3

SPECrate®2017\_fp\_peak = 2.44

SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Platform Notes (Continued)

vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
15. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled always [madvice] never  
hpage\_pmd\_size 536870912  
shmem\_enabled always within\_size advise [never] deny force  
-----

-----  
16. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 8191  
max\_ptes\_shared 4096  
max\_ptes\_swap 1024  
pages\_to\_scan 65536  
scan\_sleep\_millisecs 10000  
-----

-----  
17. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 24.04.1 LTS  
-----

-----  
18. Disk information  
SPEC is set to: /home/mjm/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 ext4 439G 298G 119G 72% /  
-----

-----  
19. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: HR330A 7X33CT01WW  
Product Family: Lenovo ThinkSystem HR330A/HR350A  
-----

-----  
20. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x Samsung M393A2K43CB2-CTD 16 GB 2 rank 2667  
-----

-----  
21. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: LENOVO  
BIOS Version: HVE104N-1.12  
BIOS Date: 11/29/2019  
BIOS Revision: 1.12  
Firmware Revision: 1.7  
-----



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Power Settings Notes

OS CPU governor was set using the command:  
echo performance | tee /sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor

## Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----

gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
-----

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----

g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
-----

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----

g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
-----

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----

g++ (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
GNU Fortran (GCC) 15.2.0
Copyright (C) 2025 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
-----

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Compiler Version Notes (Continued)

GNU Fortran (GCC) 15.2.0  
Copyright (C) 2025 Free Software Foundation, Inc.  
This is free software; see the source for copying conditions. There is NO  
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

-----  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

GNU Fortran (GCC) 15.2.0  
Copyright (C) 2025 Free Software Foundation, Inc.  
This is free software; see the source for copying conditions. There is NO  
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.  
gcc (GCC) 15.2.0  
Copyright (C) 2025 Free Software Foundation, Inc.  
This is free software; see the source for copying conditions. There is NO  
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

## Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gfortran gcc

Benchmarks using both C and C++:

g++ gcc

Benchmarks using Fortran, C, and C++:

g++ gcc gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Base Portability Flags (Continued)

510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LINUX -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-mabi=lp64 -std=c99 -g -O3 -mcpu=native -flto=16  
-fno-strict-aliasing -L/home/mjm/jemalloc/lib -ljemalloc

### C++ benchmarks:

-mabi=lp64 -std=c++03 -g -O3 -mcpu=native -flto=16  
-L/home/mjm/jemalloc/lib -ljemalloc

### Fortran benchmarks:

-mabi=lp64 -g -O3 -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib  
-ljemalloc

### Benchmarks using both Fortran and C:

-mabi=lp64 -std=c99 -g -O3 -mcpu=native -flto=16  
-fno-strict-aliasing -L/home/mjm/jemalloc/lib -ljemalloc

### Benchmarks using both C and C++:

-mabi=lp64 -std=c++03 -std=c99 -g -O3 -mcpu=native -flto=16  
-fno-strict-aliasing -L/home/mjm/jemalloc/lib -ljemalloc

### Benchmarks using Fortran, C, and C++:

-mabi=lp64 -std=c++03 -std=c99 -g -O3 -mcpu=native -flto=16  
-fno-strict-aliasing -L/home/mjm/jemalloc/lib -ljemalloc



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Base Other Flags

C benchmarks:

-Wno-error=implicit-int

Fortran benchmarks:

-fallow-argument-mismatch

Benchmarks using both Fortran and C:

-Wno-error=implicit-int -fallow-argument-mismatch

Benchmarks using both C and C++:

-Wno-error=implicit-int

Benchmarks using Fortran, C, and C++:

-Wno-error=implicit-int -fallow-argument-mismatch

## Peak Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gfortran gcc

Benchmarks using both C and C++:

g++ gcc

Benchmarks using Fortran, C, and C++:

g++ gcc gfortran

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
**(3.00 GHz Ampere eMAG 8180)**

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Peak Optimization Flags

C benchmarks:

```
-mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g -Ofast  
-mcpu=native -flto=16 -L/home/mjm/jemalloc/lib -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -mabi=lp64 -std=c++03 -fprofile-generate -fprofile-use  
-g -Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib  
-ljemalloc
```

510.parest\_r: basepeak = yes

Fortran benchmarks:

```
-mabi=lp64 -fprofile-generate -fprofile-use -g -Ofast -mcpu=native  
-flto=16 -L/home/mjm/jemalloc/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g  
-Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib  
-ljemalloc
```

```
527.cam4_r: -mabi=lp64 -std=c99 -fprofile-generate -fprofile-use -g  
-Ofast -mcpu=native -flto=16 -fno-strict-aliasing  
-L/home/mjm/jemalloc/lib -ljemalloc
```

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-mabi=lp64 -std=c++03 -std=c99 -fprofile-generate -fprofile-use -g  
-Ofast -mcpu=native -flto=16 -L/home/mjm/jemalloc/lib -ljemalloc
```

## Peak Other Flags

Benchmarks using both Fortran and C:

```
521.wrf_r: -fallow-argument-mismatch
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
(Test Sponsor: Ampere Computing, Inc.)  
**ThinkSystem HR330A**  
(3.00 GHz Ampere eMAG 8180)

SPECrate®2017\_fp\_base = 2.12  
SPECrate®2017\_fp\_energy\_base = 27.3  
SPECrate®2017\_fp\_peak = 2.44  
SPECrate®2017\_fp\_energy\_peak = 31.4

**CPU2017 License:** 6412  
**Test Sponsor:** Ampere Computing, Inc.  
**Tested by:** Ampere Computing, Inc.

**Test Date:** Feb-2026  
**Hardware Availability:** Apr-2019  
**Software Availability:** Aug-2025

## Peak Other Flags (Continued)

527.cam4\_r: -Wno-error=implicit-int -fallow-argument-mismatch

Benchmarks using both C and C++:  
-Wno-error=implicit-int

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2017/flags/gcc.2026-04-28.00.xml>

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-02-28 03:48:04-0500.  
Report generated on 2026-04-28 13:17:10 by CPU2017 PDF formatter v6716.  
Originally published on 2026-04-28.