



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081


Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

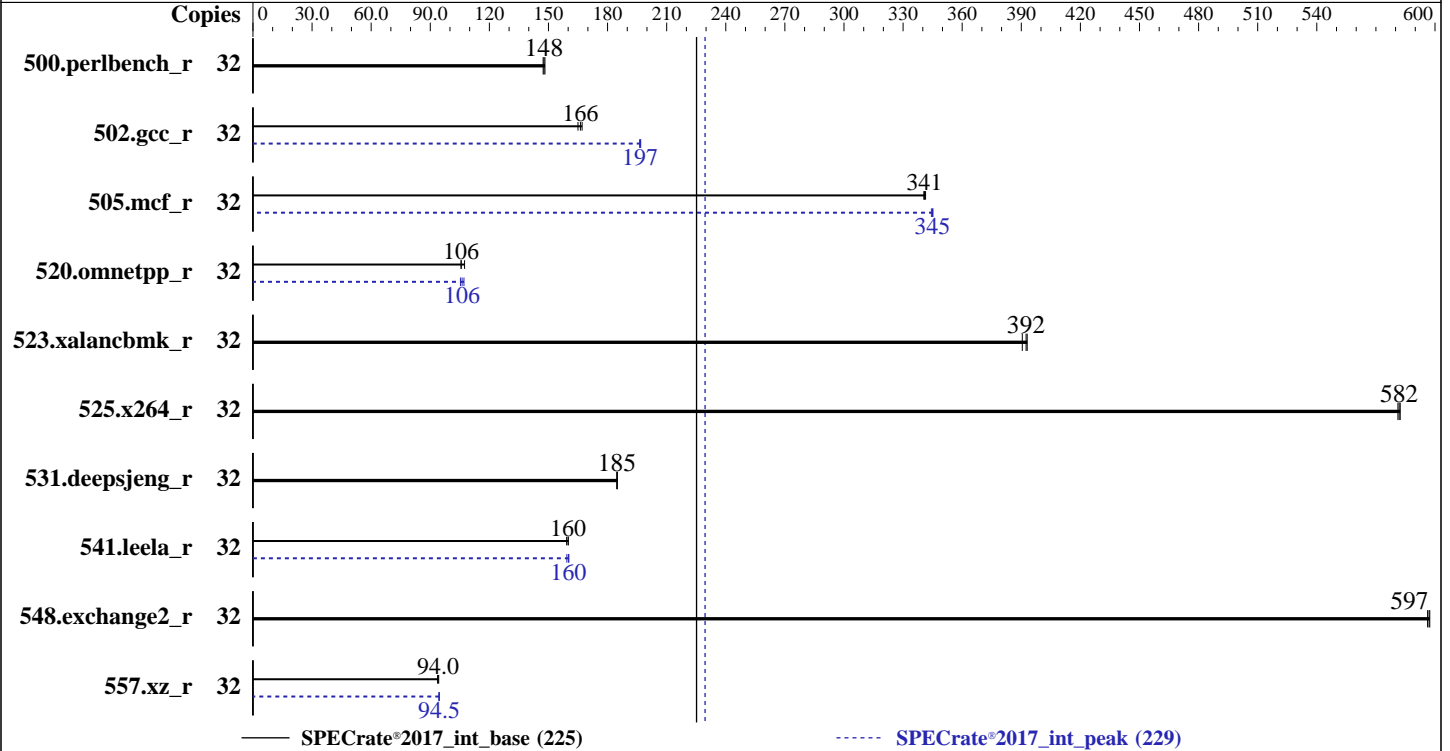

Hardware

CPU Name: AMD EPYC 9115
 Max MHz: 4100
 Nominal: 2600
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
 Storage: 1 x 1.92 TB SATA III SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-101-generic x86_64
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: BIOS Version 1004 released Nov-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	346	147	344	148	<u>345</u>	<u>148</u>	32	346	147	344	148	<u>345</u>	<u>148</u>
502.gcc_r	32	271	167	<u>273</u>	<u>166</u>	275	165	32	<u>230</u>	<u>197</u>	230	197	231	196
505.mcf_r	32	152	341	<u>152</u>	<u>341</u>	151	341	32	150	344	150	345	<u>150</u>	<u>345</u>
520.omnetpp_r	32	391	107	<u>397</u>	<u>106</u>	397	106	32	<u>396</u>	<u>106</u>	399	105	392	107
523.xalancbmk_r	32	86.0	393	<u>86.1</u>	<u>392</u>	86.5	391	32	86.0	393	<u>86.1</u>	<u>392</u>	86.5	391
525.x264_r	32	96.2	582	<u>96.3</u>	<u>582</u>	96.4	581	32	96.2	582	<u>96.3</u>	<u>582</u>	96.4	581
531.deepsjeng_r	32	198	185	<u>198</u>	<u>185</u>	199	185	32	198	185	<u>198</u>	<u>185</u>	199	185
541.leela_r	32	333	159	<u>331</u>	<u>160</u>	331	160	32	330	160	333	159	<u>331</u>	<u>160</u>
548.exchange2_r	32	141	596	<u>140</u>	<u>597</u>	140	597	32	141	596	<u>140</u>	<u>597</u>	140	597
557.xz_r	32	369	93.7	367	94.3	<u>368</u>	<u>94.0</u>	32	<u>366</u>	<u>94.5</u>	366	94.4	365	94.6

SPECrate®2017_int_base = 225

SPECrate®2017_int_peak = 229

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
'sync; sysctl -w vm.drop_caches=3' was used to clear filesystem caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
The Linux operating system is running in graphical.target.
'systemctl stop tuned; systemctl disable tuned' were used to disable the tuned daemon.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib:/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Bios settings:

SR-IOV Support = Disable

SVM Mode = Enable

NUMA nodes per socket = NPS2

Determinism Control = Manual

Determinism Enable = Power

TDP Control = Manual

TDP = 240

PPT Control = Manual

PPT = 240

SMT Control = Enable

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /cpu2017-1.1.9/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on sut Tue Mar 10 16:06:18 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
12. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux sut 6.8.0-101-generic #101-Ubuntu SMP PREEMPT_DYNAMIC Mon Feb 9 10:15:05 UTC 2026 x86_64 x86_64
x86_64 GNU/Linux
```

```
-----
2. w
16:06:18 up 18 min, 1 user, load average: 0.12, 0.03, 0.04
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1     -              16:02       9.00s      0.91s     0.05s    /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   unlimited
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6189757
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/tempslogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017-1.1.9
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9115 16-Core Processor
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

```

vendor_id      : AuthenticAMD
cpu family     : 26
model         : 2
stepping      : 1
microcode     : 0xb002151
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 16
siblings      : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9115 16-Core Processor
BIOS Model name:      AMD EPYC 9115 16-Core Processor
                       2.6GHz
                       107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             1
Stepping:              1
Frequency boost:      enabled
CPU(s) scaling MHz:   69%
CPU max MHz:           4115.8198
CPU min MHz:           1500.0000
BogoMIPS:              5252.35
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                       pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                       nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                       monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
                       xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm
                       sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                       perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                       hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
                       vmmcall fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                       rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                       avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                       cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
                       avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                       amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
                       tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                       pftthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

Platform Notes (Continued)

```

                                avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
                                bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
                                avx512_vp2intersect flush_lld debug_swap
L1d cache:                       768 KiB (16 instances)
L1i cache:                       512 KiB (16 instances)
L2 cache:                         16 MiB (16 instances)
L3 cache:                         64 MiB (2 instances)
NUMA node(s):                     2
NUMA node0 CPU(s):               0-7,16-23
NUMA node1 CPU(s):               8-15,24-31
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit:     Not affected
Vulnerability Lltf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:         Not affected
Vulnerability Mmio stale data:   Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:         Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:            Not affected
Vulnerability Tsa:              Not affected
Vulnerability Tsx async abort:  Not affected
Vulnerability Vmscape:         Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	16	Unified	2	1024	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 386334 MB
node 0 free: 385570 MB
node 1 cpus: 8-15,24-31
node 1 size: 387019 MB
node 1 free: 386395 MB
node distances:
node  0  1
 0:  10  12
 1:  12  10

```

9. /proc/meminfo

MemTotal: 791915412 kB

10. who -r

run-level 5 Mar 10 15:48

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)

```
Default Target  Status
graphical      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        apparmor apport blk-availability console-setup e2scrub_reap finalrd getty@ gpu-manager
                grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb systemd-networkd
                systemd-pstore systemd-resolved thermald ufw unattended-upgrades
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled       console-getty debug-shell ipmievd iscsid nftables numad serial-getty@ ssh
                systemd-boot-check-no-failures systemd-confext systemd-network-generator
                systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code
                systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy
                systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysext
                systemd-time-wait-sync tuned upower
generated      openipmi
indirect       systemd-sysupdate systemd-sysupdate-reboot
masked         cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo systemd-networkd-wait-online
                x11-common
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-101-generic
root=UUID=40338855-ed28-479d-9fce-40874beafd7
ro
```

14. cpupower frequency-info

```
analyzing CPU 14:
  current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2600MHz
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

```

vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness                1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /cpu2017-1.1.9
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sdd2   ext4  1.8T  145G  1.5T   9% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      ASUSTeK COMPUTER INC.
Product:     RS521A-E12-RS12U
Product Family: Server
Serial:      T7S0CG0000A6

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
12x Samsung M321R8GA0PB2-CCPWF 64 GB 2 rank 6400, configured at 5200

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

BIOS Version: 1004
BIOS Date: 11/14/2025
BIOS Revision: 10.4

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

```

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

```

```

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

```

525.x264_r: basepeak = yes

```

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Optimization Flags (Continued)

557.xz_r (continued):

```
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl
```

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_int_base = 225

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_int_peak = 229

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-10 12:06:18-0400.

Report generated on 2026-05-14 10:55:49 by CPU2017 PDF formatter v6716.

Originally published on 2026-05-14.