



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081


Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

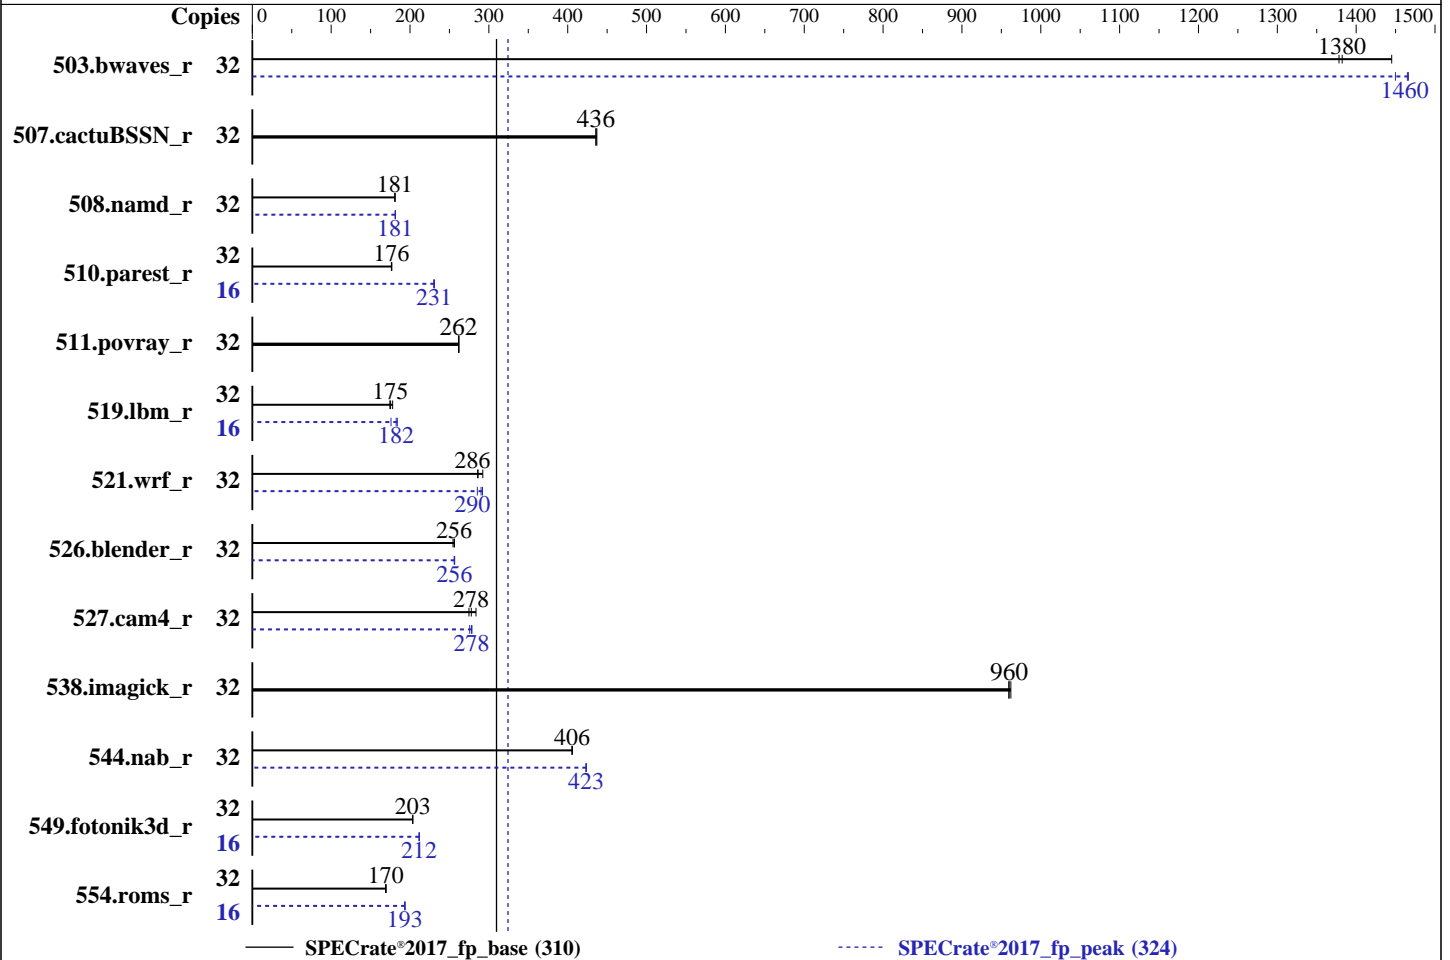

Hardware

CPU Name: AMD EPYC 9115
 Max MHz: 4100
 Nominal: 2600
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
 Storage: 1 x 1.92 TB SATA III SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-101-generic x86_64
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: BIOS Version 1004 released Nov-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	233	1380	222	1450	<u>232</u>	<u>1380</u>	32	221	1450	219	1470	<u>219</u>	<u>1460</u>
507.cactuBSSN_r	32	93.0	436	92.7	437	<u>93.0</u>	<u>436</u>	32	93.0	436	92.7	437	<u>93.0</u>	<u>436</u>
508.namd_r	32	168	181	<u>168</u>	<u>181</u>	168	181	32	168	181	<u>168</u>	<u>181</u>	168	181
510.parest_r	32	<u>474</u>	<u>176</u>	473	177	474	176	16	<u>181</u>	<u>231</u>	181	231	182	230
511.povray_r	32	285	262	286	262	<u>286</u>	<u>262</u>	32	285	262	286	262	<u>286</u>	<u>262</u>
519.lbm_r	32	<u>192</u>	<u>175</u>	190	178	193	174	16	95.9	176	91.7	184	<u>92.4</u>	<u>182</u>
521.wrf_r	32	245	292	<u>250</u>	<u>286</u>	251	286	32	246	292	251	285	<u>247</u>	<u>290</u>
526.blender_r	32	<u>190</u>	<u>256</u>	190	256	191	255	32	<u>190</u>	<u>256</u>	190	256	190	257
527.cam4_r	32	197	284	<u>202</u>	<u>278</u>	204	275	32	<u>201</u>	<u>278</u>	203	276	201	279
538.imagick_r	32	82.9	959	82.7	962	<u>82.9</u>	<u>960</u>	32	82.9	959	82.7	962	<u>82.9</u>	<u>960</u>
544.nab_r	32	133	405	133	406	<u>133</u>	<u>406</u>	32	<u>127</u>	<u>423</u>	127	424	127	423
549.fotonik3d_r	32	<u>613</u>	<u>203</u>	613	203	613	203	16	<u>295</u>	<u>212</u>	294	212	295	211
554.roms_r	32	<u>300</u>	<u>170</u>	301	169	300	170	16	132	193	131	194	<u>131</u>	<u>193</u>

SPECrate®2017_fp_base = 310

SPECrate®2017_fp_peak = 324

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
'sync; sysctl -w vm.drop_caches=3' was used to clear filesystem caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
The Linux operating system is running in graphical.target.
'systemctl stop tuned; systemctl disable tuned' were used to disable the tuned daemon.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib:/cpu2017-1.1.9/amd_rate_aocc500_znver5_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Bios settings:

```
SR-IOV Support = Disable  
SVM Mode = Enable  
NUMA nodes per socket = NPS2  
Determinism Control = Manual  
Determinism Enable = Power  
TDP Control = Manual  
TDP = 240  
PPT Control = Manual  
PPT = 240  
SMT Control = Enable
```

BMC Configuration:

```
Fan mode = Full speed mode
```

```
Sysinfo program /cpu2017-1.1.9/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on sut Tue Mar 10 20:08:15 2026
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.12)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux sut 6.8.0-101-generic #101-Ubuntu SMP PREEMPT_DYNAMIC Mon Feb 9 10:15:05 UTC 2026 x86_64 x86_64
x86_64 GNU/Linux
```

```
-----
2. w
 20:08:15 up 4:20, 1 user, load average: 24.62, 30.17, 31.21
USER  TTY  FROM          LOGIN@  IDLE   JCPU   PCPU   WHAT
root  tty1  -             16:02   4:02m  1.06s  0.15s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   unlimited
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6189757
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio            0
```

```
-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Date: Mar-2026

Test Sponsor: Epsilon IT Sp. z o.o.

Hardware Availability: Oct-2024

Tested by: Epsilon IT Sp. z o.o.

Software Availability: Feb-2026

Platform Notes (Continued)

```

runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017-1.1.9

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9115 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002151
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 16
siblings      : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0-31

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9115 16-Core Processor
BIOS Model name:      AMD EPYC 9115 16-Core Processor           Unknown CPU @
                                                                2.6GHz
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             1
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:   69%
CPU max MHz:           4115.8198
CPU min MHz:           1500.0000
BogoMIPS:              5252.35
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpelgb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm
sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

```

perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced
vmmcall fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk
avx_vnni avx512_bf16 clzero irperf xsaveptra rdpru wbnoinvd
amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov succor smca fsmr
avx512_vp2intersect flush_llid debug_swap
Lld cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 16 MiB (16 instances)
L3 cache: 64 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swappgs barriers and __user pointer
sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	16	Unified	2	1024	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-7,16-23
node 0 size: 386334 MB
node 0 free: 385365 MB
node 1 cpus: 8-15,24-31
node 1 size: 387019 MB
node 1 free: 386134 MB
node distances:
node 0 1

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

0: 10 12
1: 12 10

9. /proc/meminfo

MemTotal: 791915412 kB

10. who -r

run-level 5 Mar 10 15:48

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled apparmor appport blk-availability console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb systemd-networkd systemd-pstore systemd-resolved thermald ufw unattended-upgrades

enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs

disabled console-getty debug-shell ipmievd iscsid nftables numad serial-getty@ ssh

systemd-boot-check-no-failures systemd-confext systemd-network-generator

systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code

systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy

systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext

systemd-time-wait-sync tuned upower

generated openipmi

indirect systemd-sysupdate systemd-sysupdate-reboot

masked cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo systemd-networkd-wait-online

x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.8.0-101-generic

root=UUID=40338855-ed28-479d-9fce-40874beafd7

ro

14. cpupower frequency-info

analyzing CPU 27:

current policy: frequency should be within 1.50 GHz and 2.60 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2600MHz

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.

Preset profile: throughput-performance

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

16. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              1
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       1

```

17. /sys/kernel/mm/transparent_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

19. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

20. Disk information

SPEC is set to: /cpu2017-1.1.9

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdd2       ext4  1.8T  145G  1.5T   9% /

```

21. /sys/devices/virtual/dmi/id

```

Vendor:      ASUSTeK COMPUTER INC.
Product:     RS521A-E12-RS12U
Product Family: Server
Serial:      T7S0CG0000A6

```

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Samsung M321R8GA0PB2-CCPWF 64 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 1004
BIOS Date: 11/14/2025
BIOS Revision: 10.4

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

```

C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -ldl

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
538.imagick_r: basepeak = yes
```

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

-lamdalloc -ldl -lflang

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

Peak Optimization Flags (Continued)

526.blender_r (continued):

```
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevB-Mar-2026-For-AMD-Processors.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Epsilon IT Sp. z o.o.

SPECrate®2017_fp_base = 310

eterio 127 RZ3 (2.60 GHz, AMD EPYC 9115)

SPECrate®2017_fp_peak = 324

CPU2017 License: 9081

Test Sponsor: Epsilon IT Sp. z o.o.

Tested by: Epsilon IT Sp. z o.o.

Test Date: Mar-2026

Hardware Availability: Oct-2024

Software Availability: Feb-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-10 16:08:15-0400.

Report generated on 2026-05-14 10:56:09 by CPU2017 PDF formatter v6716.

Originally published on 2026-05-14.