



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo


SPECspeed®2017\_int\_base = 14.9

### Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

CPU2017 License: 7114  
Test Sponsor: Positivo  
Tested by: Positivo

Test Date: Mar-2026  
Hardware Availability: Mar-2026  
Software Availability: Jun-2025

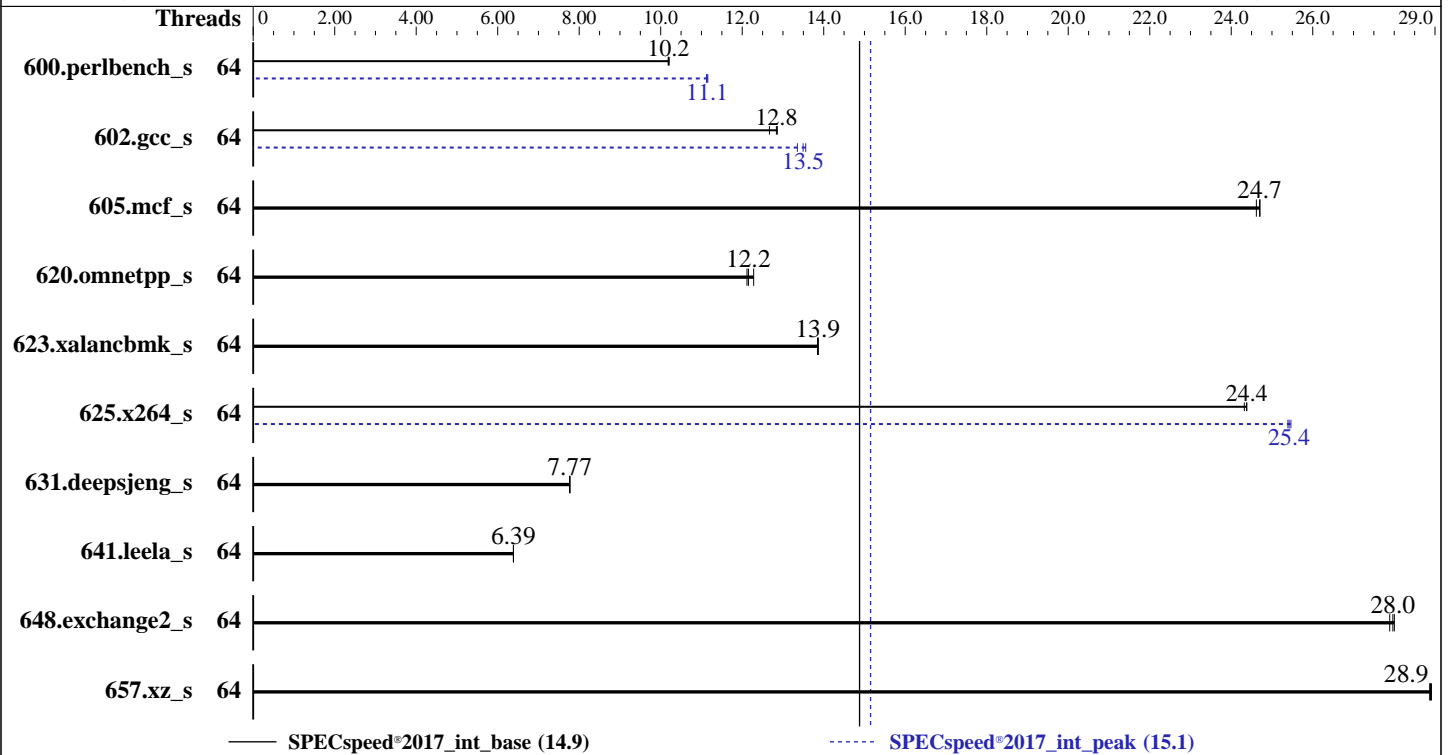

### Hardware

CPU Name: Intel Xeon 6530P  
Max MHz: 4100  
Nominal: 2300  
Enabled: 64 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 144 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)  
Storage: 1 x 960 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP7  
6.4.0-150700.51-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Version 7.00.24 released Jan-2026 BIOS  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

## Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

CPU2017 License: 7114  
Test Sponsor: Positivo  
Tested by: Positivo

Test Date: Mar-2026  
Hardware Availability: Mar-2026  
Software Availability: Jun-2025

### Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	<b>174</b>	<b>10.2</b>	174	10.2	174	10.2	64	159	11.2	160	11.1	<b>159</b>	<b>11.1</b>
602.gcc_s	64	314	12.7	310	12.9	<b>310</b>	<b>12.8</b>	64	<b>295</b>	<b>13.5</b>	298	13.4	294	13.6
605.mcf_s	64	191	24.7	<b>191</b>	<b>24.7</b>	192	24.6	64	191	24.7	<b>191</b>	<b>24.7</b>	192	24.6
620.omnetpp_s	64	<b>134</b>	<b>12.2</b>	133	12.3	135	12.1	64	<b>134</b>	<b>12.2</b>	133	12.3	135	12.1
623.xalancbmk_s	64	102	13.9	<b>102</b>	<b>13.9</b>	102	13.8	64	102	13.9	<b>102</b>	<b>13.9</b>	102	13.8
625.x264_s	64	72.5	24.3	<b>72.4</b>	<b>24.4</b>	72.4	24.4	64	<b>69.4</b>	<b>25.4</b>	69.5	25.4	69.3	25.5
631.deepsjeng_s	64	185	7.77	184	7.77	<b>184</b>	<b>7.77</b>	64	185	7.77	184	7.77	<b>184</b>	<b>7.77</b>
641.leela_s	64	267	6.38	<b>267</b>	<b>6.39</b>	267	6.39	64	267	6.38	<b>267</b>	<b>6.39</b>	267	6.39
648.exchange2_s	64	<b>105</b>	<b>28.0</b>	105	27.9	105	28.0	64	<b>105</b>	<b>28.0</b>	105	27.9	105	28.0
657.xz_s	64	214	28.9	<b>214</b>	<b>28.9</b>	214	28.9	64	214	28.9	<b>214</b>	<b>28.9</b>	214	28.9

SPECspeed®2017\_int\_base = **14.9**

SPECspeed®2017\_int\_peak = **15.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

### Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

## Platform Notes

### BIOS Settings:

SNC = Enable  
LLC Prefetch = Enabled  
ACPI C6x Enumeration = C6 as ACPI C2  
Latency Optimized Mode = Enable  
BMC Settings:  
Fan mode = powerful mode  
Enable LP = Single LP

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Mar 4 10:10:51 2026

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/1p)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
10:10:51 up 6 min, 1 user, load average: 0.05, 0.08, 0.05
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root     tty1      -             10:09       40.00s     0.83s     0.00s     -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

### Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

## Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 2062308
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 2062308
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base,peak -o all --define
  intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.296/templogs/preenv.intspeed.296.0.log
--lognum 296.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6530P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003f3
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.40.4:

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

### Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

## Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                    GenuineIntel
Model name:                   Intel(R) Xeon(R) 6530P
CPU family:                   6
Model:                        173
Thread(s) per core:          1
Core(s) per socket:          32
Socket(s):                    2
Stepping:                     1
CPU(s) scaling MHz:          46%
CPU max MHz:                  4100.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4600.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                               xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                               ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                               rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                               intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                               xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                               avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                               avx512_vnni avx512_bitalg tme avx512_vppopcntdq la57 rdpid
                               bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                               serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fpl6 amx_tile
                               amx_int8 flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   3 MiB (64 instances)
L1i cache:                   4 MiB (64 instances)
L2 cache:                    128 MiB (64 instances)
L3 cache:                    288 MiB (2 instances)
NUMA node(s):                2
NUMA node0 CPU(s):           0-31
NUMA node1 CPU(s):           32-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                               PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:         Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

## Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

### Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	64K	4M	16	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 257630 MB
node 0 free: 256818 MB
node 1 cpus: 32-63
node 1 size: 257976 MB
node 1 free: 257178 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

9. /proc/meminfo

MemTotal: 527981420 kB

10. who -r

run-level 3 Mar 4 10:05

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gnome-remote-desktop gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect	pcscd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

## Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

### Platform Notes (Continued)

```
root=UUID=caa76791-ac18-477b-958c-517956aed673
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 52:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

## Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

### Platform Notes (Continued)

#### 19. Disk information

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	892G	595G	296G	67%	/home

#### 20. /sys/devices/virtual/dmi/id

```
Vendor:      Positivo
Product:    Inteliserver R2000 G10
Product Family: Rack
Serial:    123456789
```

#### 21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

##### Memory:

```
10x Hynix HMC88AHBRA290N 32 GB 2 rank 6400
1x Hynix HMC88AHBRA472N 32 GB 2 rank 6400
5x Hynix HMC88AHBRA478N 32 GB 2 rank 6400
```

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:    7.00.24
BIOS Date:       01/30/2026
BIOS Revision:   5.35
Firmware Revision: 2.14
```

### Compiler Version Notes

```
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
  | 657.xz_s(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
    | 641.leela_s(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
Fortran | 648.exchange2_s(base, peak)
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Positivo

SPECspeed®2017\_int\_base = 14.9

Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Positivo

SPECspeed®2017\_int\_base = 14.9

Inteliserver R2000 G10 (Intel Xeon 6530P)

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 7114  
**Test Sponsor:** Positivo  
**Tested by:** Positivo

**Test Date:** Mar-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Jun-2025

## Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Positivo-Platform-Settings-GNR-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Positivo-Platform-Settings-GNR-V1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-03 21:10:50-0500.  
Report generated on 2026-06-02 13:49:24 by CPU2017 PDF formatter v6716.  
Originally published on 2026-06-02.