



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

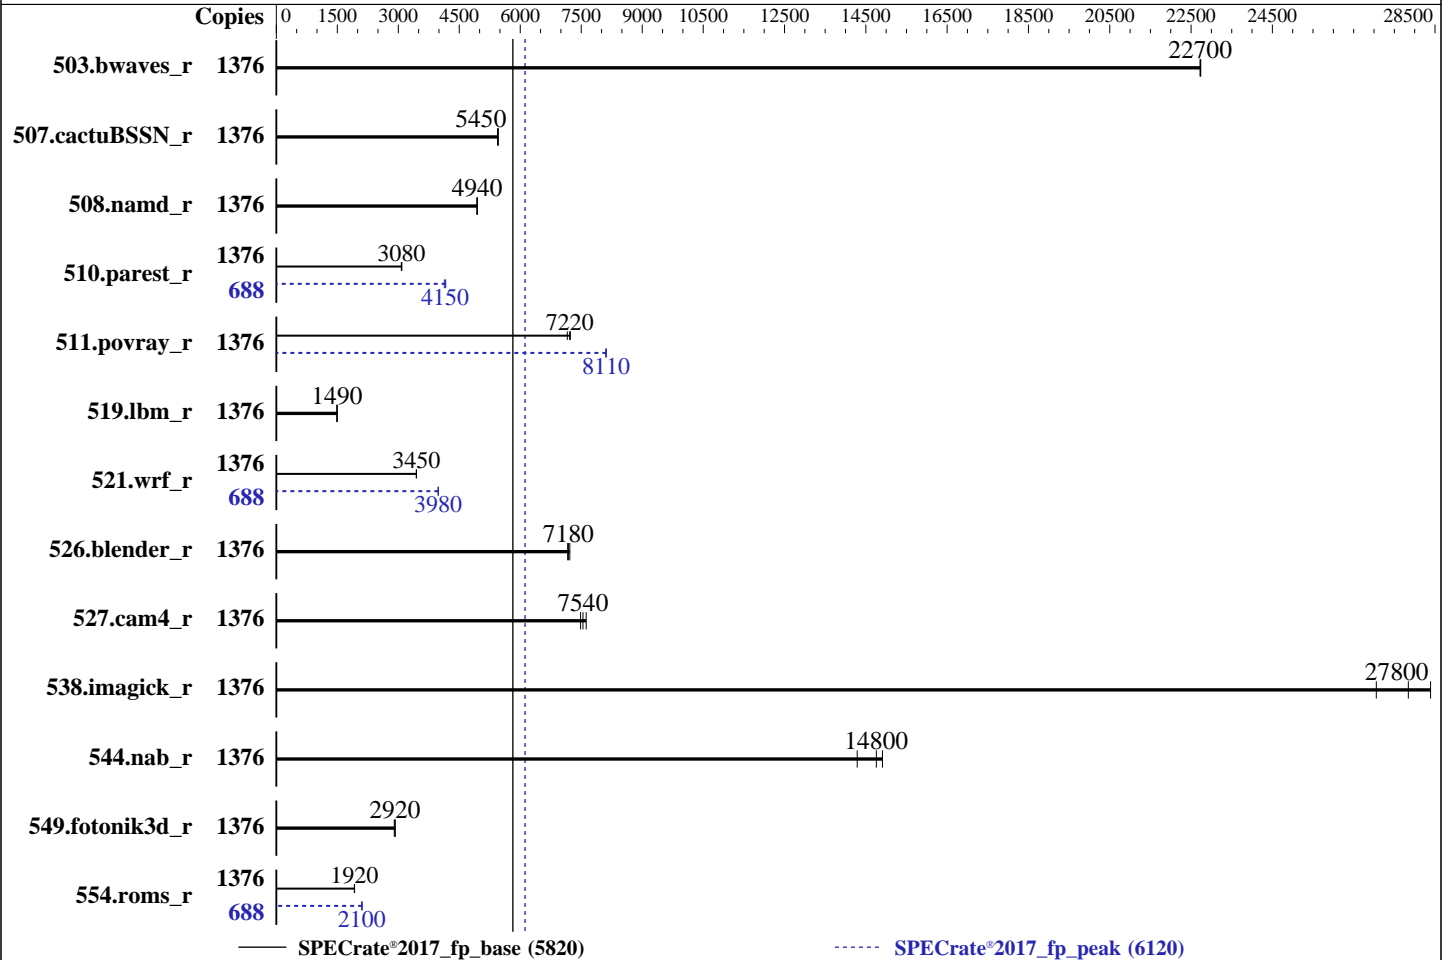

Hardware

CPU Name: Intel Xeon 6788P
 Max MHz: 3800
 Nominal: 2000
 Enabled: 688 cores, 8 chips, 2 threads/core
 Orderable: 4, 8, 12, 16 chip(s)
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 336 MB I+D on chip per chip
 Other: None
 Memory: 4 TB (64 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 1.5 TB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.53.31-default
 Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE Firmware Bundle Version 1.0.306 01/10/2026 released Jan-2026
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250
(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Apr-2026
Software Availability: Feb-2026

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	1376	607	22700	607	22700	607	22700	1376	607	22700	607	22700	607	22700
507.cactuBSSN_r	1376	319	5460	319	5450	320	5440	1376	319	5460	319	5450	320	5440
508.namd_r	1376	265	4940	264	4940	265	4930	1376	265	4940	264	4940	265	4930
510.parest_r	1376	1168	3080	1166	3090	1171	3070	688	436	4130	433	4150	432	4170
511.povray_r	1376	449	7160	444	7230	445	7220	1376	396	8110	396	8110	396	8120
519.lbm_r	1376	972	1490	971	1490	971	1490	1376	972	1490	971	1490	971	1490
521.wrf_r	1376	894	3450	895	3450	895	3440	688	387	3980	387	3990	387	3980
526.blender_r	1376	290	7220	292	7180	292	7170	1376	290	7220	292	7180	292	7170
527.cam4_r	1376	316	7620	322	7480	319	7540	1376	316	7620	322	7480	319	7540
538.imagick_r	1376	121	28400	123	27800	126	27100	1376	121	28400	123	27800	126	27100
544.nab_r	1376	157	14800	162	14300	155	14900	1376	157	14800	162	14300	155	14900
549.fotonik3d_r	1376	1836	2920	1849	2900	1835	2920	1376	1836	2920	1849	2900	1835	2920
554.roms_r	1376	1136	1920	1139	1920	1138	1920	688	520	2100	518	2110	521	2100

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_new/lib/intel64:/home/cpu2017_new/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

```

Workload Profile set to Custom
Power Regulator set to Static High Performance Mode
Energy Efficient Turbo set to Disabled
Energy/Performance Bias set to Maximum Performance
Advanced Memory Protection set to Advanced ECC Support
SR-IOV set to Disabled
Intel Virtualization Technology (Intel VT, VT-x) set to Disabled
Adjacent Sector Prefetch set to Disabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Enhanced Processor Performance Profile set to Aggressive
Memory Patrol Scrubbing set to Disabled

```

```

Sysinfo program /home/cpu2017_new/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on gnh-159 Mon Feb 23 20:38:58 2026

```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.179.g75eab961ea)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

1. uname -a
Linux gnh-159 6.4.0-150700.53.31-default #1 SMP PREEMPT_DYNAMIC Tue Feb 3 14:18:17 UTC 2026 (73f3a11)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
20:38:58 up 4 min, 1 user, load average: 34.81, 15.92, 5.97
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
test     ttyS0    -             20:38      10.00s     0.07s     0.05s     login -- test
test     pts/0    -             20:38      10.00s     1.87s     0.03s     sudo su

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Platform Notes (Continued)

3. Username

```
From environment variable $USER: root
From the command 'logname': test
```

4. ulimit -a

```
core file size          (blocks, -c) 0
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 16247672
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 40000
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 16247672
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=39
login -- test
-bash
sudo su
sudo su
su
bash
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1376 -c
ic2025.2-linux64-sapphirerapids-rate-20250605.cfg --define smt-on --define cores=688 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1376 --configfile
ic2025.2-linux64-sapphirerapids-rate-20250605.cfg --define smt-on --define cores=688 --define
physicalfirst --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all
--nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_new
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6788P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping      : 1
microcode     : 0x1000405
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi vmscape
cpu cores     : 86
siblings      : 172
8 physical ids (chips)
1376 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Apr-2026
Software Availability: Feb-2026

Platform Notes (Continued)

```
physical id 2: core ids 0-42,64-106
physical id 3: core ids 0-42,64-106
physical id 4: core ids 0-42,64-106
physical id 5: core ids 0-42,64-106
physical id 6: core ids 0-42,64-106
physical id 7: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469
physical id 2: apicids 512-597,640-725
physical id 3: apicids 768-853,896-981
physical id 4: apicids 1024-1109,1152-1237
physical id 5: apicids 1280-1365,1408-1493
physical id 6: apicids 1536-1621,1664-1749
physical id 7: apicids 1792-1877,1920-2005
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                1376
On-line CPU(s) list:  0-1375
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6788P
CPU family:            6
Model:                173
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             8
Stepping:              1
CPU(s) scaling MHz:   21%
CPU max MHz:          3800.0000
CPU min MHz:          800.0000
BogoMIPS:              3999.52
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64
monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3
cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms
invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpcmlmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
ibpb_exit_to_user
L1d cache:            32.3 MiB (688 instances)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Apr-2026
Software Availability: Feb-2026

Platform Notes (Continued)

```

L1i cache:                43 MiB (688 instances)
L2 cache:                  1.3 GiB (688 instances)
L3 cache:                  2.6 GiB (8 instances)
NUMA node(s):              16
NUMA node0 CPU(s):        0-42,688-730
NUMA node1 CPU(s):        43-85,731-773
NUMA node2 CPU(s):        86-128,774-816
NUMA node3 CPU(s):        129-171,817-859
NUMA node4 CPU(s):        172-214,860-902
NUMA node5 CPU(s):        215-257,903-945
NUMA node6 CPU(s):        258-300,946-988
NUMA node7 CPU(s):        301-343,989-1031
NUMA node8 CPU(s):        344-386,1032-1074
NUMA node9 CPU(s):        387-429,1075-1117
NUMA node10 CPU(s):       430-472,1118-1160
NUMA node11 CPU(s):       473-515,1161-1203
NUMA node12 CPU(s):       516-558,1204-1246
NUMA node13 CPU(s):       559-601,1247-1289
NUMA node14 CPU(s):       602-644,1290-1332
NUMA node15 CPU(s):       645-687,1333-1375
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Mitigation; IBPB before exit to userspace

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	32.3M	12	Data	1	64	1	64
L1i	64K	43M	16	Instruction	1	64	1	64
L2	2M	1.3G	16	Unified	2	2048	1	64
L3	336M	2.6G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-42,688-730
node 0 size: 256724 MB
node 0 free: 255678 MB
node 1 cpus: 43-85,731-773
node 1 size: 250007 MB
node 1 free: 249108 MB
node 2 cpus: 86-128,774-816
node 2 size: 257986 MB
node 2 free: 257407 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Platform Notes (Continued)

```

node 3 cpus: 129-171,817-859
node 3 size: 250023 MB
node 3 free: 249480 MB
node 4 cpus: 172-214,860-902
node 4 size: 258025 MB
node 4 free: 257481 MB
node 5 cpus: 215-257,903-945
node 5 size: 250023 MB
node 5 free: 249449 MB
node 6 cpus: 258-300,946-988
node 6 size: 258025 MB
node 6 free: 257496 MB
node 7 cpus: 301-343,989-1031
node 7 size: 250023 MB
node 7 free: 249285 MB
node 8 cpus: 344-386,1032-1074
node 8 size: 258025 MB
node 8 free: 257738 MB
node 9 cpus: 387-429,1075-1117
node 9 size: 250023 MB
node 9 free: 249742 MB
node 10 cpus: 430-472,1118-1160
node 10 size: 258025 MB
node 10 free: 257727 MB
node 11 cpus: 473-515,1161-1203
node 11 size: 250023 MB
node 11 free: 249740 MB
node 12 cpus: 516-558,1204-1246
node 12 size: 258025 MB
node 12 free: 257723 MB
node 13 cpus: 559-601,1247-1289
node 13 size: 250023 MB
node 13 free: 249736 MB
node 14 cpus: 602-644,1290-1332
node 14 size: 258025 MB
node 14 free: 257730 MB
node 15 cpus: 645-687,1333-1375
node 15 size: 248947 MB
node 15 free: 248661 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 16 16 16 16 18 18 40 40 40 40 40 40 40 40
1:  12 10 16 16 16 16 18 18 40 40 40 40 40 40 40 40
2:  16 16 10 12 18 18 16 16 40 40 40 40 40 40 40 40
3:  16 16 12 10 18 18 16 16 40 40 40 40 40 40 40 40
4:  16 16 18 18 10 12 16 16 40 40 40 40 40 40 40 40
5:  16 16 18 18 12 10 16 16 40 40 40 40 40 40 40 40
6:  18 18 16 16 16 16 10 12 40 40 40 40 40 40 40 40
7:  18 18 16 16 16 16 12 10 40 40 40 40 40 40 40 40
8:  40 40 40 40 40 40 40 40 10 12 16 16 16 16 18 18
9:  40 40 40 40 40 40 40 40 12 10 16 16 16 16 18 18
10: 40 40 40 40 40 40 40 40 16 16 10 12 18 18 16 16
11: 40 40 40 40 40 40 40 40 16 16 12 10 18 18 16 16
12: 40 40 40 40 40 40 40 40 16 16 18 18 10 12 16 16
13: 40 40 40 40 40 40 40 40 16 16 18 18 12 10 16 16
14: 40 40 40 40 40 40 40 40 18 18 16 16 16 16 10 12
15: 40 40 40 40 40 40 40 40 18 18 16 16 16 16 12 10

```

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Apr-2026
Software Availability: Feb-2026

Platform Notes (Continued)

MemTotal: 4159441784 kB

10. who -r
run-level 3 Feb 23 20:38

11. Systemd service manager version: systemd 254 (254.27+suse.179.g75eab961ea)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd
cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown
display-manager getty@ hpe-auto-config hpe_irqbalance iscsi issue-generator kbdsettings
kdump kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback
rsyslog smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability
bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamd clamonacc
console-getty cups cups-browsed cxl-monitor debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd irqbalance iscsi-init iscsid
issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named
ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount ostree-state-overlay@
rpcbind rpmconfigcheck rsyncd rtkit-daemon samba-bgqd smartd_generate_opts smb snmpd
snmptrapd spamd spampd speech-dispatcherd srp_daemon srp_daemon_port@ sysstat
sysstat_collect sysstat_summary systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd tuned
indirect udisks2 update-system-flatpaks upower vncserver@ winbind wsdd ypbind
serial-getty@ systemd-userdbd tftp wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.53.31-default
root=UUID=bcaa5a07-b428-4eb8-82e6-8155bbbcd9db
rd.auto=1
console=ttyS0,115200n8
selinux=0
security=
splash=silent
mitigations=auto
console=ttyS0,115200
udev.children-max=512
nmi_watchdog=0
uv_nmi.action=kdump
add_efi_memmap
tsc=nowatchdog
earlyprintk=ttyS0,115200
log_buf_len=8M
numa_balancing=disable
crashkernel=1G,high
watchdog_thresh=60
workqueue.watchdog_thresh=120

14. cpupower frequency-info
analyzing CPU 340:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Platform Notes (Continued)

current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active
No current active profile.

16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
hpe-foundation-release HPE Foundation Software 2.5.9, Build 757.1570.260209T0200.a.sles15sp7hpe-260209T0200

20. Disk information
SPEC is set to: /home/cpu2017_new
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2026
Hardware Availability: Apr-2026
Software Availability: Feb-2026

Platform Notes (Continued)

/dev/nvme1nlp2 xfs 1.5T 806G 684G 55% /

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: Compute Scale-up Server 3250
Product Family: 1590PID03030202
Serial: 5UFD3H1634-000

22. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
64x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: Bundle:1.0.306-20260122_103756 SFW:010.000.158.000.2601100246
BIOS Date: 01/10/2026

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Compiler Version Notes (Continued)

Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs

-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Compute Scale-up Server 3250

(2.00 GHz, Intel Xeon 6788P)

SPECrate®2017_fp_base = 5820

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2026

Hardware Availability: Apr-2026

Software Availability: Feb-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-CSS-GNR-rev1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-CSS-GNR-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-02-23 21:38:57-0500.

Report generated on 2026-04-22 06:55:44 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-21.