



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066


Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

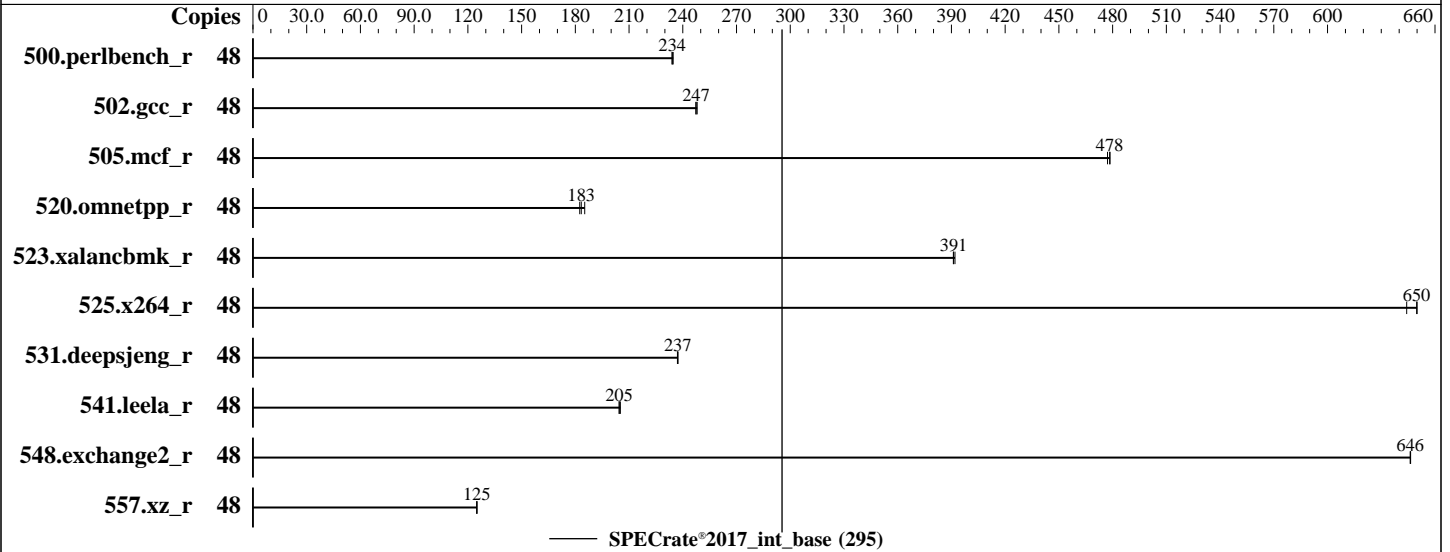

Hardware

CPU Name: Intel Xeon 6505P
 Max MHz: 4100
 Nominal: 2200
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
 6.4.0-150700.51-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 7.00.19 released Sep-2025 BIOS
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	327	234	326	235	326	234							
502.gcc_r	48	275	247	274	248	275	247							
505.mcf_r	48	163	477	162	479	162	478							
520.omnetpp_r	48	345	182	340	185	344	183							
523.xalancbmk_r	48	130	391	129	392	130	391							
525.x264_r	48	130	644	129	650	129	650							
531.deepsjeng_r	48	232	237	232	237	232	237							
541.leela_r	48	389	205	389	204	387	205							
548.exchange2_r	48	195	646	195	646	195	646							
557.xz_r	48	415	125	415	125	415	125							

SPECrate®2017_int_base = 295

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes

BIOS Settings:

SNC = Enable
ACPI C6x Enumeration = C6 as ACPI C2
Latency Optimized Mode = Enabled

BMC Settings:

Fan mode = powerful mode

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Jan 13 13:28:12 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:28:12 up 22:04, 5 users, load average: 0.00, 0.09, 6.10
USER  TTY  FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1  -             Mon15   36.00s 1.27s  0.02s -bash
root  pts/0 172.17.74.7   Mon20   17:19m 0.04s  0.04s -bash
root  pts/1 172.17.74.7   13:23   4:19   0.00s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 2062145
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 2062145
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.200/templogs/preenv.intrate.200.0.log --lognum 200.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6505P
vendor_id      : GenuineIntel
cpu family      : 6
model          : 173
stepping       : 1
microcode      : 0x10003d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 12
siblings       : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0-23
physical id 1: apicids 128-151
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.40.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Date: Jan-2026

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2025

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    48
On-line CPU(s) list:      0-47
Vendor ID:                 GenuineIntel
Model name:               Intel(R) Xeon(R) 6505P
CPU family:               6
Model:                    173
Thread(s) per core:      2
Core(s) per socket:      12
Socket(s):                2
Stepping:                 1
CPU(s) scaling MHz:      47%
CPU max MHz:              4100.0000
CPU min MHz:              800.0000
BogoMIPS:                 4400.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                          pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                          nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                          pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                          xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                          tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                          3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                          ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                          vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                          rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                          intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                          xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                          split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                          arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                          umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                          avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                          cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                          pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                          arch_capabilities
Virtualization:           VT-x
L1d cache:               1.1 MiB (24 instances)
L1i cache:               1.5 MiB (24 instances)
L2 cache:                48 MiB (24 instances)
L3 cache:                96 MiB (2 instances)
NUMA node(s):            2
NUMA node0 CPU(s):      0-11,24-35
NUMA node1 CPU(s):      12-23,36-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:  Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                          PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	64K	1.5M	16	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	48M	96M	16	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 257578 MB
node 0 free: 245135 MB
node 1 cpus: 12-23,36-47
node 1 size: 257987 MB
node 1 free: 247625 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10

```

9. /proc/meminfo

MemTotal: 527939772 kB

10. who -r

run-level 3 Jan 12 15:24

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
eatables exchange-bmc-os-info firewallld fsidd gnome-remote-desktop gpm grub2-once haveged
ipmi ipmievd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd
nfs nfs-blkmap nmb openvpn@ ostree-remount ostree-state-overlay@ rpcbind rpmconfigcheck
rsyncd rtkit-daemon samba-bgqd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=caa76791-ac18-477b-958c-517956aed673
splash=silent
mitigations=auto

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 15:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

```
-----
19. Disk information
SPEC is set to: /home/speccpu
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	892G	425G	468G	48%	/home

```

20. /sys/devices/virtual/dmi/id
Vendor:      New H3C Technologies Co., Ltd.
Product:     H3C UniServer R4900 G7
Product Family: Rack
Serial:      210235A51GH249000019

```

```

21. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  10x Hynix HMC88AHB290N 32 GB 2 rank 6400
  1x Hynix HMC88AHB472N 32 GB 2 rank 6400
  5x Hynix HMC88AHB478N 32 GB 2 rank 6400

```

```

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     7.00.19
BIOS Date:        09/26/2025
BIOS Revision:    5.35
Firmware Revision: 2.8

```

Compiler Version Notes

```

=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
C++   | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran | 548.exchange2_r(base)
=====

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017_int_base = 295

H3C UniServer R4900 G7 (Intel Xeon 6505P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jan-2026

Hardware Availability: Mar-2025

Software Availability: Jun-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-Intel-GNR-RevC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-01-13 00:28:11-0500.

Report generated on 2026-04-07 22:09:24 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-07.