



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12


(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

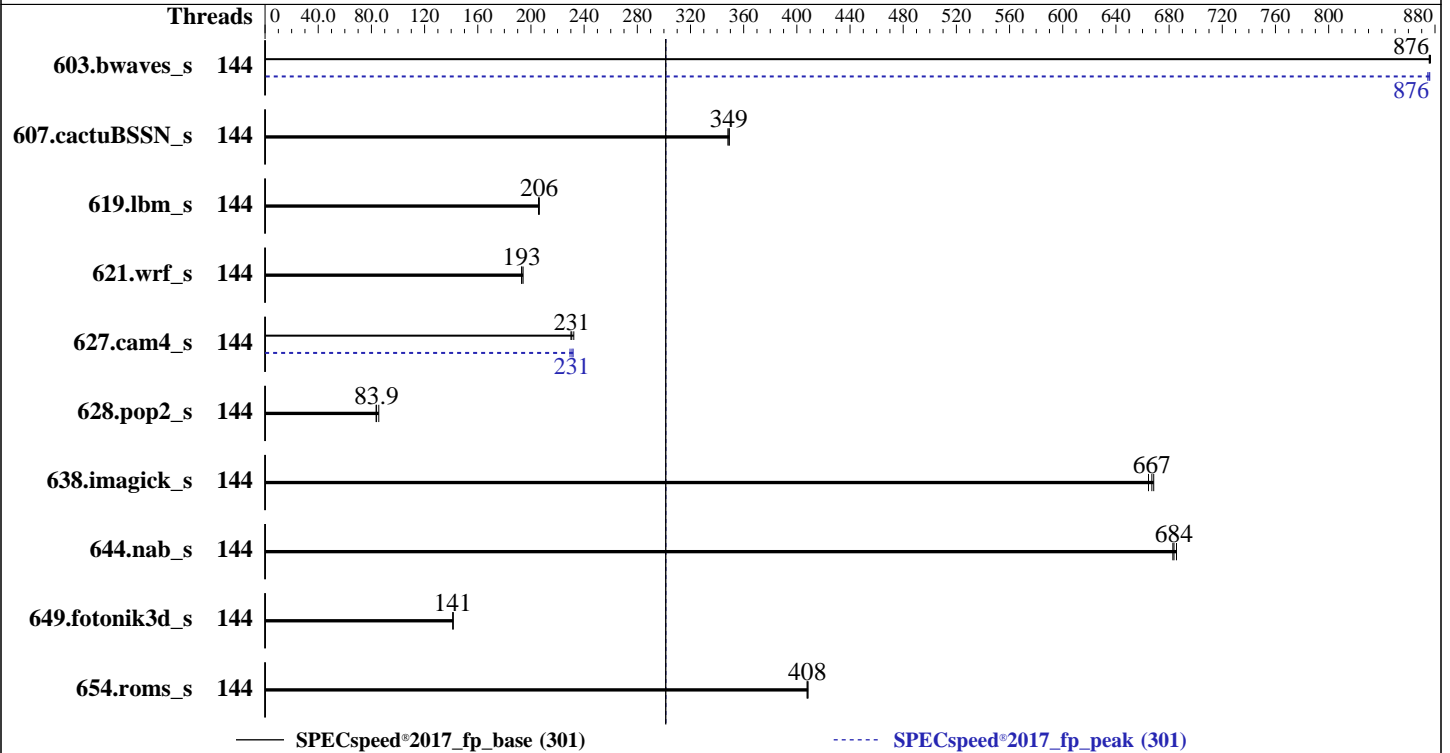

Hardware

CPU Name: Intel Xeon 6776P-B
Max MHz: 3500
Nominal: 2300
Enabled: 72 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 288 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 480 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.6 (Plow)
Kernel 5.14.0-570.12.1.el9_6.x86_64
Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: HPE BIOS Version v1.30 02/06/2026 released Feb-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS is set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12
(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	144	67.4	876	67.4	876	67.3	877	144	67.5	875	67.3	876	67.4	876
607.cactuBSSN_s	144	47.9	348	47.8	349	47.7	349	144	47.9	348	47.8	349	47.7	349
619.lbm_s	144	25.4	206	25.4	206	25.5	206	144	25.4	206	25.4	206	25.5	206
621.wrf_s	144	68.5	193	68.5	193	68.1	194	144	68.5	193	68.5	193	68.1	194
627.cam4_s	144	38.2	232	38.5	230	38.4	231	144	38.4	231	38.6	229	38.2	232
628.pop2_s	144	139	85.5	142	83.9	142	83.5	144	139	85.5	142	83.9	142	83.5
638.imagick_s	144	21.6	668	21.6	667	21.7	664	144	21.6	668	21.6	667	21.7	664
644.nab_s	144	25.5	686	25.6	684	25.6	683	144	25.5	686	25.6	684	25.6	683
649.fotonik3d_s	144	64.5	141	64.5	141	64.4	141	144	64.5	141	64.5	141	64.4	141
654.roms_s	144	38.5	408	38.6	408	38.6	408	144	38.5	408	38.6	408	38.6	408

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile was set to virtual-host using 'tuned-adm profile virtual-host'

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute
Thermal Configuration set to Maximum Cooling
Sub-NUMA Clustering (SNC) set to Enabled
Last Level Cache (LLC) Prefetch set to Enabled
Enhanced Processor Performance Profile set to Aggressive
Memory Patrol Scrubbing set to Disabled
DRAM RAPL Reporting Support set to Disabled
Workload Profile set to Custom
Adjacent Sector Prefetch set to Disabled
DCU Stream Prefetcher set to Disabled
Uncore Frequency Scaling set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Mar 31 02:30:24 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-51.el9)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-570.12.1.el9_6.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Apr 4 10:41:31 EDT 2025
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:30:24 up 4 min, 1 user, load average: 0.02, 0.13, 0.07
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     pts/0    02:27   8.00s  0.85s  0.00s  -bash
```

3. Username

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

From environment variable \$USER: root

```

-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1029705
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1029705
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2025.2-lin-graniterapids-speed-20250605.cfg --iterations=3 --reportable --define cores=144 --tune
base,peak -o all --define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2025.2-lin-graniterapids-speed-20250605.cfg --iterations 3 --reportable --define cores=144 --tune
base,peak --output_format all --define drop_caches --nopower --runmode speed --tune base:peak --size
refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) 6776P-B
vendor_id      : GenuineIntel
cpu family     : 6
model          : 174
stepping       : 1
microcode      : 0x1000303
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 72
siblings      : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-35,64-99
physical id 0: apicids 0-71,128-199
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      144
On-line CPU(s) list:        0-143
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  INTEL(R) XEON(R) 6776P-B
BIOS Model name:             INTEL(R) XEON(R) 6776P-B
CPU family:                  6
Model:                      174
Thread(s) per core:         2
Core(s) per socket:         72
Socket(s):                   1
Stepping:                    1
BogoMIPS:                    4600.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
                             xtpr pcdm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                             rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                             intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                             xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln
                             pts vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                             vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                             bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   3.4 MiB (72 instances)
L1i cache:                   4.5 MiB (72 instances)
L2 cache:                    144 MiB (72 instances)
L3 cache:                    288 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):          0-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:         Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	64K	4.5M	16	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	288M	288M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-143
node 0 size: 257472 MB
node 0 free: 255557 MB
node distances:
node      0
0:        10
```

9. /proc/meminfo

```
MemTotal:      263651400 kB
```

10. who -r

```
run-level 3 Mar 31 02:26
```

11. Systemd service manager version: systemd 252 (252-51.el9)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor lvm2-monitor mdmonitor microcode nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator systemd-pstore tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata kvm_stat lvm-devices-import man-db-restart-cache-update nftables nvme-autoconnect pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-sysex
indirect	sss-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-570.12.1.el9_6.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

-----
14. cpupower frequency-info
   analyzing CPU 103:
     Unable to determine current policy
     boost state support:
       Supported: yes
       Active: yes
-----

15. tuned-adm active
   Current active profile: virtual-host
-----

16. sysctl
   kernel.numa_balancing          0
   kernel.randomize_va_space     2
   vm.compaction_proactiveness   20
   vm.dirty_background_bytes     0
   vm.dirty_background_ratio     5
   vm.dirty_bytes                0
   vm.dirty_expire_centisecs     3000
   vm.dirty_ratio                40
   vm.dirty_writeback_centisecs  500
   vm.dirtytime_expire_seconds   43200
   vm.extfrag_threshold          500
   vm.min_unmapped_ratio         1
   vm.nr_hugepages               0
   vm.nr_hugepages_mempolicy     0
   vm.nr_overcommit_hugepages    0
   vm.swappiness                  10
   vm.watermark_boost_factor     15000
   vm.watermark_scale_factor     10
   vm.zone_reclaim_mode          0
-----

17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvice [madvice] never
   enabled         [always] madvice never
   hpage_pmd_size 2097152
   shmem_enabled  always within_size advise [never] deny force
-----

18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap           64
   pages_to_scan           4096
   scan_sleep_millisecs   10000
-----

19. OS release
   From /etc/*-release /etc/*-version
   os-release      Red Hat Enterprise Linux 9.6 (Plow)
   redhat-release  Red Hat Enterprise Linux release 9.6 (Plow)
   system-release  Red Hat Enterprise Linux release 9.6 (Plow)
-----

20. Disk information

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12
(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	372G	120G	252G	33%	/home

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         HPE ProLiant Compute EL140 Gen12
Product Family: ProLiant
Serial:          PZEDFAXLMLN075
-----

```

```

-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Hynix HMC88AHBRA471N 32 GB 2 rank 6400
-----

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:     HPE
BIOS Version:    1.30
BIOS Date:       02/06/2026
BIOS Revision:   1.30
Firmware Revision: 1.20
-----

```

Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
-----

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
 Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
 Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
 607.cactuBSSN_s: -DSPEC_LP64
 619.lbm_s: -DSPEC_LP64
 621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
 627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
 628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
 -assume byterecl
 638.imagick_s: -DSPEC_LP64
 644.nab_s: -DSPEC_LP64
 649.fotonik3d_s: -DSPEC_LP64
 654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
 -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xgraniterapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xgraniterapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.6.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.6.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute EL140 Gen12

(2.30 GHz, Intel Xeon 6776P-B)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 301

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-30 17:00:24-0400.
Report generated on 2026-04-22 06:55:19 by CPU2017 PDF formatter v6716.
Originally published on 2026-04-21.