



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

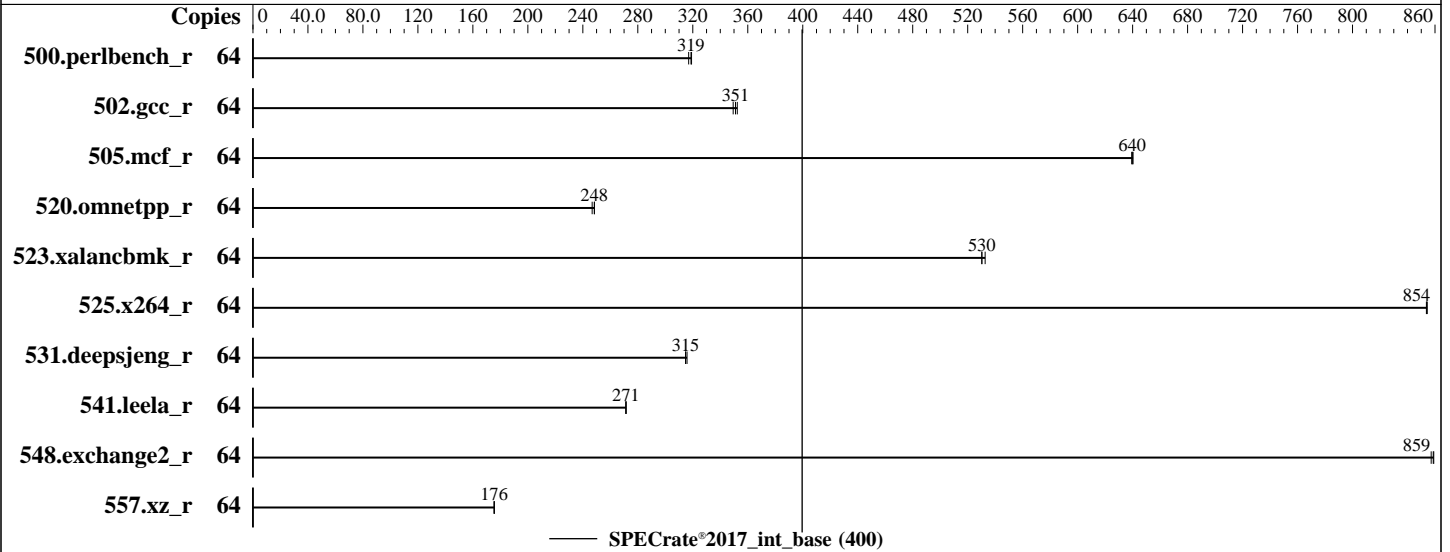

Hardware

CPU Name: Intel Xeon 6725P
 Max MHz: 4800
 Nominal: 3700
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 192 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 1.92 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.51-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version IHE115I 1.40 released Dec-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	64	321	317	319	319	<u>320</u>	<u>319</u>									
502.gcc_r	64	<u>258</u>	<u>351</u>	257	352	259	349									
505.mcf_r	64	162	639	162	640	<u>162</u>	<u>640</u>									
520.omnetpp_r	64	338	248	<u>338</u>	<u>248</u>	340	247									
523.xalancbmk_r	64	<u>127</u>	<u>530</u>	127	530	127	533									
525.x264_r	64	131	854	131	854	<u>131</u>	<u>854</u>									
531.deepsjeng_r	64	232	316	233	315	<u>233</u>	<u>315</u>									
541.leela_r	64	390	271	391	271	<u>390</u>	<u>271</u>									
548.exchange2_r	64	196	857	195	859	<u>195</u>	<u>859</u>									
557.xz_r	64	394	176	394	176	<u>394</u>	<u>176</u>									

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/lib/ia32:/home/cpu2017-1.1.9-ic
  2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Workload Profile set to Custom

C1 Enhanced Mode set to Disabled

Latency Optimized Mode set to Enabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Mar 19 20:03:28 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:03:28 up 3 min, 1 user, load average: 0.17, 0.14, 0.07
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

core file size      (blocks, -c) unlimited
data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 4127320
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 4127320
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.02.sh
sh Run502-compliant-ic2024.1-lin-sapphirerapids-rateint-base-smt-on-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.222/temlogs/preenv.intrate.222.0.log --lognum 222.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6725P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000405
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapsg bhi
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.40.4:

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                    GenuineIntel
Model name:                   Intel(R) Xeon(R) 6725P
CPU family:                   6
Model:                        173
Thread(s) per core:          2
Core(s) per socket:          16
Socket(s):                    2
Stepping:                     1
BogoMIPS:                     7400.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                               xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                               ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                               rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                               intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                               xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                               gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                               la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                               md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                               amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   1.5 MiB (32 instances)
L1i cache:                   2 MiB (32 instances)
L2 cache:                    64 MiB (32 instances)
L3 cache:                    384 MiB (2 instances)
NUMA node(s):                2
NUMA node0 CPU(s):           0-15,32-47
NUMA node1 CPU(s):           16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability Lltf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                               PBRSE-eIBRS Not affected; BHI BHI_DIS_S

Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL   SETS PHY-LINE COHERENCY-SIZE

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

Platform Notes (Continued)

L1d	48K	1.5M	12 Data	1	64	1	64
L1i	64K	2M	16 Instruction	1	64	1	64
L2	2M	64M	16 Unified	2	2048	1	64
L3	192M	384M	16 Unified	3	196608	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 515833 MB
node 0 free: 514588 MB
node 1 cpus: 16-31,48-63
node 1 size: 516024 MB
node 1 free: 514884 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

9. /proc/meminfo

MemTotal: 1056621992 kB

10. who -r

run-level 3 Mar 19 20:00

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix
purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd-generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd
indirect systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=eb0c0382-5e54-4f88-b5ea-362ec22387d3
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

14. cpupower frequency-info
analyzing CPU 4:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer+advise [advise] never
enabled [always] advise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.8T 60G 1.7T 4% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: May-2026
Software Availability: Jun-2025

Platform Notes (Continued)

Product: ThinkSystem SR650 V4
Product Family: ThinkSystem
Serial: 0987654321

21. dmidecode

Additional information from dmidecode 3.6 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Samsung M321R8GA0PB1-CCPPC 64 GB 2 rank 6400
5x Samsung M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
4x Samsung M321R8GA0PB1-CCPYC 64 GB 2 rank 6400
2x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
1x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
2x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: IHE115I-1.40
BIOS Date: 12/16/2025
BIOS Revision: 1.40
Firmware Revision: 2.0

Compiler Version Notes

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 400

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V4
(3.70 GHz, Intel Xeon 6725P)

SPECrate®2017_int_base = 400

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: May-2026

Software Availability: Jun-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-19 08:03:27-0400.

Report generated on 2026-04-28 13:16:45 by CPU2017 PDF formatter v6716.

Originally published on 2026-04-28.