



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

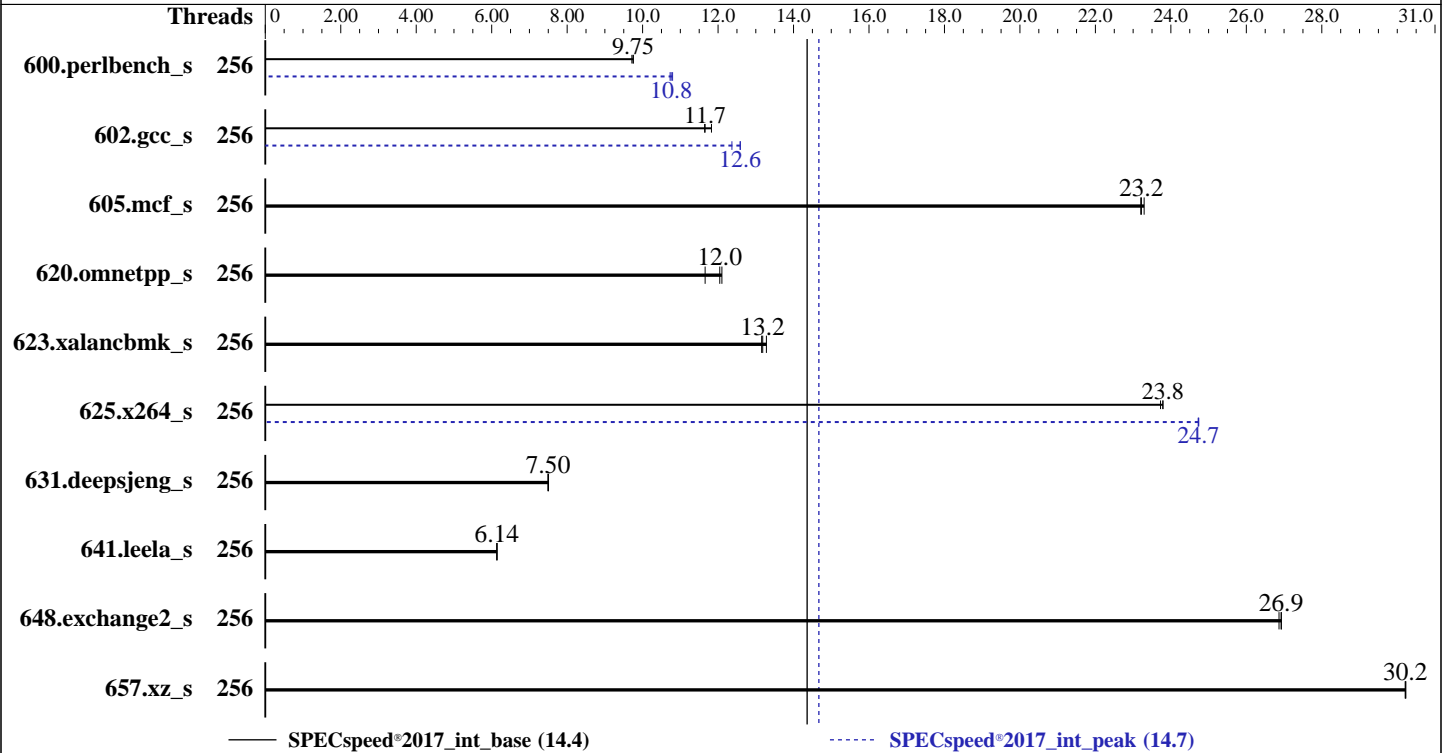

### Hardware

CPU Name: Intel Xeon 6767P  
 Max MHz: 3900  
 Nominal: 2400  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 222 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2025.2 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 4.3.6c released Jun-2025  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Mar-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jun-2025

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	183	9.72	<b><u>182</u></b>	<b><u>9.75</u></b>	182	9.75	256	165	10.7	164	10.8	<b><u>165</u></b>	<b><u>10.8</u></b>
602.gcc_s	256	<b><u>342</u></b>	<b><u>11.7</u></b>	342	11.6	337	11.8	256	316	12.6	<b><u>316</u></b>	<b><u>12.6</u></b>	322	12.4
605.mcf_s	256	203	23.3	<b><u>203</u></b>	<b><u>23.2</u></b>	203	23.2	256	203	23.3	<b><u>203</u></b>	<b><u>23.2</u></b>	203	23.2
620.omnetpp_s	256	140	11.7	<b><u>135</u></b>	<b><u>12.0</u></b>	135	12.1	256	140	11.7	<b><u>135</u></b>	<b><u>12.0</u></b>	135	12.1
623.xalancbmk_s	256	108	13.2	<b><u>107</u></b>	<b><u>13.2</u></b>	107	13.3	256	108	13.2	<b><u>107</u></b>	<b><u>13.2</u></b>	107	13.3
625.x264_s	256	74.3	23.7	74.1	23.8	<b><u>74.2</u></b>	<b><u>23.8</u></b>	256	71.3	24.7	<b><u>71.3</u></b>	<b><u>24.7</u></b>	71.3	24.7
631.deepsjeng_s	256	191	7.51	191	7.49	<b><u>191</u></b>	<b><u>7.50</u></b>	256	191	7.51	191	7.49	<b><u>191</u></b>	<b><u>7.50</u></b>
641.leela_s	256	278	6.14	<b><u>278</u></b>	<b><u>6.14</u></b>	278	6.14	256	278	6.14	<b><u>278</u></b>	<b><u>6.14</u></b>	278	6.14
648.exchange2_s	256	109	26.9	<b><u>109</u></b>	<b><u>26.9</u></b>	109	26.9	256	109	26.9	<b><u>109</u></b>	<b><u>26.9</u></b>	109	26.9
657.xz_s	256	205	30.2	<b><u>205</u></b>	<b><u>30.2</u></b>	205	30.2	256	205	30.2	<b><u>205</u></b>	<b><u>30.2</u></b>	205	30.2

SPECspeed®2017\_int\_base = **14.4**

SPECspeed®2017\_int\_peak = **14.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Mar-2026

**Hardware Availability:** Feb-2025

**Software Availability:** Jun-2025

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Hardware prefetcher set to Enabled  
Adjacent cache line prefetcher set to Enabled  
Patrol scrub set to Disabled  
XPT prefetch set to Auto  
LLC prefetch set to Enabled  
Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Mar 30 03:13:20 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
03:13:20 up 1:44, 1 user, load average: 0.38, 0.09, 0.03

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Mar-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jun-2025

### Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	pts/0	10.29.148.201	03:08	16.00s	1.08s	0.00s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4123267
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4123267
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2025.2-lin-graniterapids-speed-20250605.cfg --define cores=128 --tune base,peak -o all --define
intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2025.2-lin-graniterapids-speed-20250605.cfg --define cores=128 --tune base,peak --output_format all
--define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.015/templogs/preenv.intspeed.015.0.log --lognum 015.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6767P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 1: core ids 0-31,64-95

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Mar-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jun-2025

### Platform Notes (Continued)

physical id 0: apicids 0-63,128-191  
physical id 1: apicids 256-319,384-447

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      256
On-line CPU(s) list:        0-255
Vendor ID:                   GenuineIntel
BIOS Vendor ID:             Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6767P
BIOS Model name:            Intel(R) Xeon(R) 6767P  CPU @ 2.4GHz
BIOS CPU family:            179
CPU family:                  6
Model:                       173
Thread(s) per core:         2
Core(s) per socket:         64
Socket(s):                   2
Stepping:                    1
CPU(s) scaling MHz:         23%
CPU max MHz:                 3900.0000
CPU min MHz:                 800.0000
BogoMIPS:                    4800.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
                             pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
                             aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                             cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                             ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
                             invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                             xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
                             wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                             hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                             vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                             rdprid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                             amx_int8 flush_lld arch_capabilities
L1d cache:                   6 MiB (128 instances)
L1i cache:                   8 MiB (128 instances)
L2 cache:                    256 MiB (128 instances)
L3 cache:                    672 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-31,128-159
NUMA node1 CPU(s):          32-63,160-191
NUMA node2 CPU(s):          64-95,192-223
NUMA node3 CPU(s):          96-127,224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Mar-2026  
**Hardware Availability:** Feb-2025  
**Software Availability:** Jun-2025

### Platform Notes (Continued)

Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	64K	8M	16	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 257228 MB
node 0 free: 256066 MB
node 1 cpus: 32-63,160-191
node 1 size: 257992 MB
node 1 free: 256902 MB
node 2 cpus: 64-95,192-223
node 2 size: 258031 MB
node 2 free: 257275 MB
node 3 cpus: 96-127,224-255
node 3 size: 257590 MB
node 3 free: 256927 MB
node distances:
node  0  1  2  3
0:  10 12 21 21
1:  12 10 21 21
2:  21 21 10 12
3:  21 21 12 10

```

9. /proc/meminfo

MemTotal: 1055582820 kB

10. who -r

run-level 3 Mar 30 01:29

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Mar-2026

**Hardware Availability:** Feb-2025

**Software Availability:** Jun-2025

### Platform Notes (Continued)

```

enabled          apparmor auditd cron getty@ irqbalance issue-generator kbdsettings kdump kdump-early
                 kdump-notify lvm2-monitor postfix purge-kernels rollback sshd systemd-pstore wicked
                 wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled        blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                 ebttables firewalld fsidd grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs
                 nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
                 systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                 systemd-timesyncd tuned
indirect        systemd-userdbd wickedd

```

#### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=6eb15e0f-1450-419e-a71e-a4777f415e7c
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=364M,high
crashkernel=72M,low

```

#### 14. cpupower frequency-info

```

analyzing CPU 230:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

#### 15. tuned-adm active

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance

```

#### 16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Mar-2026

**Hardware Availability:** Feb-2025

**Software Availability:** Jun-2025

### Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvice [madvice] never
   enabled         [always] madvice never
   hpage_pmd_size 2097152
   shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none         511
   max_ptes_shared       256
   max_ptes_swap         64
   pages_to_scan         4096
   scan_sleep_millisecs  10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb2  btrfs 222G 13G 205G 6% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:      Cisco Systems Inc
   Product:     UCSC-C240-M8E3S
   Serial:      WZP28420YYF

```

```

-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x 0x2C00 MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      Cisco Systems, Inc.
   BIOS Version:     C240M8.4.3.6c.0.0606251427
   BIOS Date:        06/06/2025
   BIOS Revision:    5.35

```

### Compiler Version Notes

```

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
  | 657.xz_s(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605  
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2026

Hardware Availability: Feb-2025

Software Availability: Jun-2025

## Compiler Version Notes (Continued)

```

=====
C++      | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
         | 641.leela_s(base, peak)
=====

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran  | 648.exchange2_s(base, peak)
=====

```

```

-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
-----

```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Mar-2026

**Hardware Availability:** Feb-2025

**Software Availability:** Jun-2025

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Mar-2026

**Hardware Availability:** Feb-2025

**Software Availability:** Jun-2025

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-fno-strict-aliasing -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

602.gcc\_s: -w -m64 -std=c11 -Wl,-z,muldefs

```
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf\_s: basepeak = yes

625.x264\_s: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3

```
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V2.0-GNR-revI.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V2.0-GNR-revI.xml>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M8 (Intel Xeon 6767P 2.4 GHz processor)

SPECspeed®2017\_int\_base = 14.4

SPECspeed®2017\_int\_peak = 14.7

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Mar-2026

**Hardware Availability:** Feb-2025

**Software Availability:** Jun-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-30 03:13:20-0400.  
Report generated on 2026-05-12 12:47:57 by CPU2017 PDF formatter v6716.  
Originally published on 2026-05-12.