



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

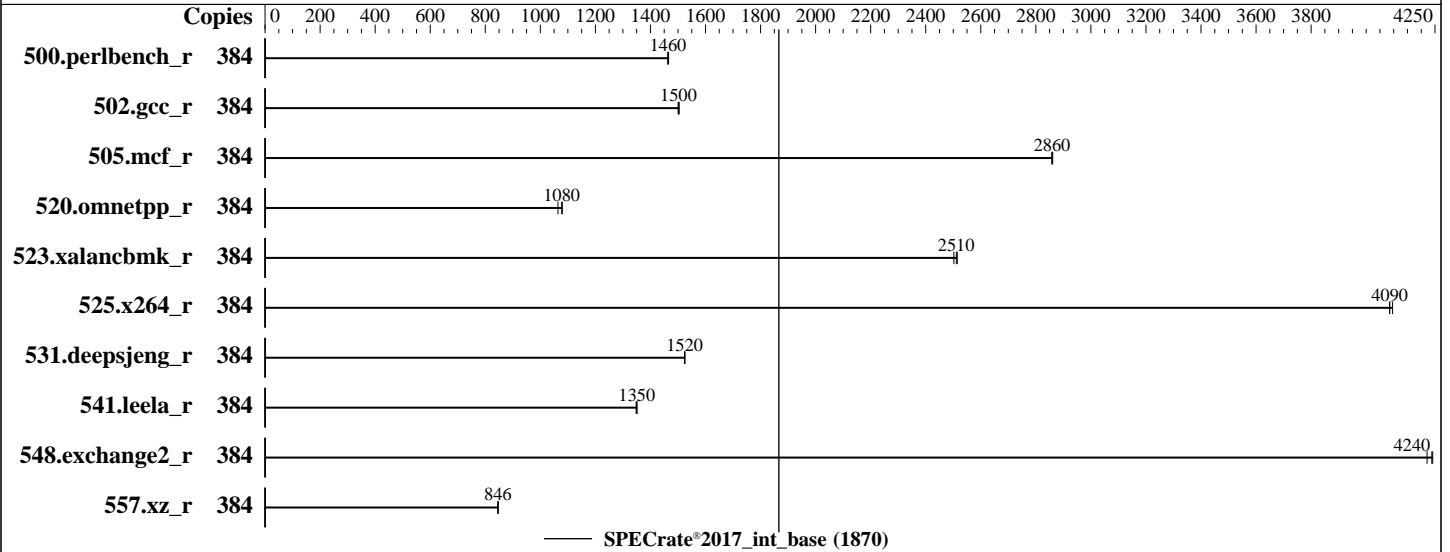

Hardware

CPU Name: Intel Xeon 6952P
 Max MHz: 3900
 Nominal: 2100
 Enabled: 192 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 480 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-88/64B-H)
 Storage: 1 x 1.92 TB NVME SSD
 Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.51-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version Q5E111L 1.20 released Dec-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	384	417	1470	418	1460	418	1460									
502.gcc_r	384	362	1500	362	1500	361	1500									
505.mcf_r	384	217	2860	217	2860	217	2860									
520.omnetpp_r	384	467	1080	473	1060	467	1080									
523.xalancbmk_r	384	162	2500	161	2510	161	2510									
525.x264_r	384	165	4090	164	4100	165	4090									
531.deepsjeng_r	384	288	1530	289	1520	289	1520									
541.leela_r	384	471	1350	472	1350	471	1350									
548.exchange2_r	384	237	4240	238	4220	237	4240									
557.xz_r	384	490	846	490	846	490	847									

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/lib/ia32:/home/cpu2017-1.1.9-ic
2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Workload Profile set to General Computing - Max Performance and then set it to Custom
C-States set to Legacy
DCU Streamer Prefetcher set to Disabled
SNC set to Enabled
UPI Link Disable set to Minimum Number Of Links Enabled
Processor Plus set to +2

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 20 09:38:24 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux

2. w
09:38:24 up 2 min, 1 user, load average: 3.97, 1.90, 0.71
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 09:38 5.00s 1.11s 0.03s -bash

3. Username

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

From environment variable \$USER: root

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 3094282
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 3094282
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=192 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=192 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.340/templogs/preenv.intrate.340.0.log --lognum 340.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

```

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6952P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000405
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 96
siblings       : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-31,64-95,128-159
physical id 1: core ids 0-31,64-95,128-159
physical id 0: apicids 0-63,128-191,256-319
physical id 1: apicids 512-575,640-703,768-831
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 1870

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6952P
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):             2
Stepping:              1
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bml avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             9 MiB (192 instances)
L1i cache:             12 MiB (192 instances)
L2 cache:              384 MiB (192 instances)
L3 cache:              960 MiB (2 instances)
NUMA node(s):          6
NUMA node0 CPU(s):    0-31,192-223
NUMA node1 CPU(s):    32-63,224-255
NUMA node2 CPU(s):    64-95,256-287
NUMA node3 CPU(s):    96-127,288-319
NUMA node4 CPU(s):    128-159,320-351
NUMA node5 CPU(s):    160-191,352-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow:  Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Srbds:
Vulnerability Tsx async abort:

PBR SB-eIBRS Not affected; BHI BHI_DIS_S
Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	64K	12M	16	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	480M	960M	16	Unified	3	491520	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 6 nodes (0-5)
node 0 cpus: 0-31,192-223
node 0 size: 128679 MB
node 0 free: 128010 MB
node 1 cpus: 32-63,224-255
node 1 size: 129006 MB
node 1 free: 128410 MB
node 2 cpus: 64-95,256-287
node 2 size: 129006 MB
node 2 free: 128471 MB
node 3 cpus: 96-127,288-319
node 3 size: 129006 MB
node 3 free: 128505 MB
node 4 cpus: 128-159,320-351
node 4 size: 128968 MB
node 4 free: 128311 MB
node 5 cpus: 160-191,352-383
node 5 size: 128928 MB
node 5 free: 128299 MB
node distances:
node  0  1  2  3  4  5
0:  10  15  17  29  29  29
1:  15  10  15  29  29  29
2:  17  15  10  29  29  29
3:  29  29  29  10  15  17
4:  29  29  29  15  10  15
5:  29  29  29  17  15  10

```

9. /proc/meminfo

MemTotal: 792163992 kB

10. who -r

run-level 3 Apr 20 09:37

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmeFc-boot-connections

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

```

nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofsd autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
vncserver@
indirect systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=ce1519fb-457a-4b1f-ab59-fcfcc7e58c27
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 152:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs 1.8T 50G 1.7T 3% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: Lenovo ThinkSystem SC750 V4 Neptune Tray
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
7x SK Hynix HMCG88BDJHA380N 32 GB 2 rank 8800
4x SK Hynix HMCG88BDJHA383N 32 GB 2 rank 8800
9x SK Hynix HMCG88BDJHA462N 32 GB 2 rank 8800
4x SK Hynix HMCG88BDJHA464N 32 GB 2 rank 8800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: Q5E111L-1.20
BIOS Date: 12/18/2025
BIOS Revision: 1.20
Firmware Revision: 2.0

Compiler Version Notes

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_base = 1870

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_int_base = 1870

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-04-19 21:38:23-0400.

Report generated on 2026-05-06 09:58:57 by CPU2017 PDF formatter v6716.

Originally published on 2026-05-05.