



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

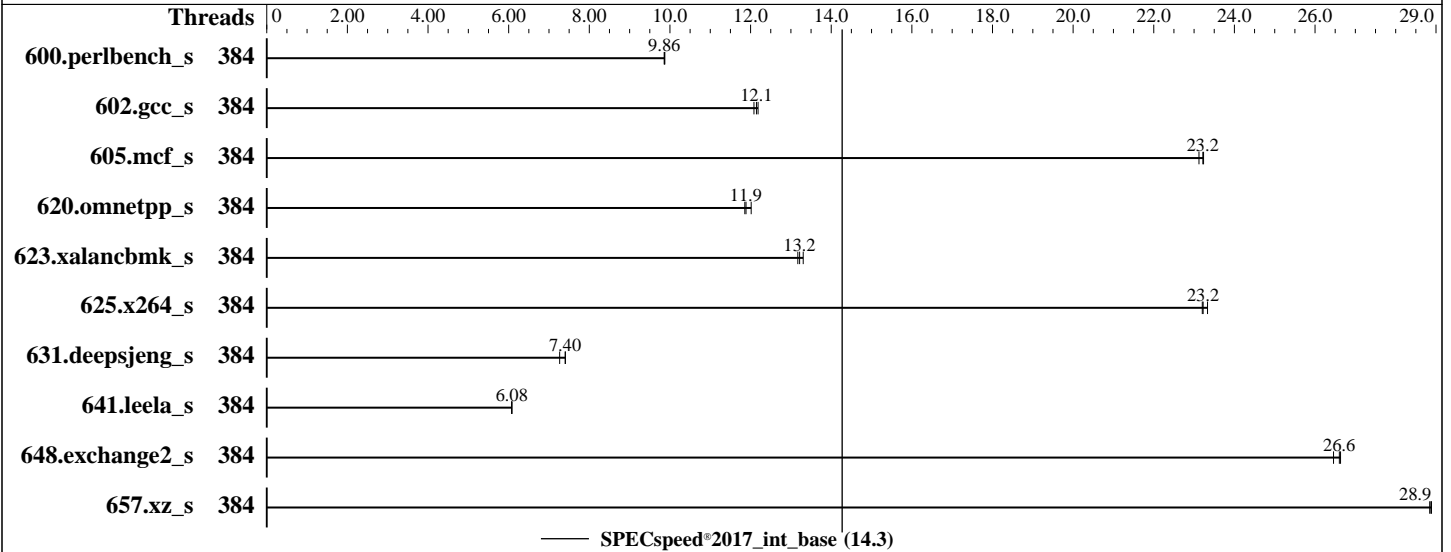

Hardware

CPU Name: Intel Xeon 6952P
 Max MHz: 3900
 Nominal: 2100
 Enabled: 192 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 480 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-88/64B-H)
 Storage: 1 x 1.92 TB NVME SSD
 Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP7
 Kernel 6.4.0-150700.51-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version Q5E111L 1.20 released Dec-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	384	180	9.86	180	9.87	180	9.86									
602.gcc_s	384	327	12.2	328	12.1	330	12.1									
605.mcf_s	384	203	23.2	204	23.1	203	23.2									
620.omnetpp_s	384	137	11.9	136	12.0	138	11.9									
623.xalancbmk_s	384	108	13.2	107	13.3	107	13.2									
625.x264_s	384	75.6	23.3	76.0	23.2	76.0	23.2									
631.deepsjeng_s	384	197	7.26	193	7.41	194	7.40									
641.leela_s	384	281	6.08	281	6.08	281	6.08									
648.exchange2_s	384	110	26.6	111	26.5	111	26.6									
657.xz_s	384	214	28.9	214	28.8	214	28.9									

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Platform Notes

BIOS configuration:

Workload Profile set to General Computing - Max Performance and then set it to Custom

C-States set to Legacy

SNC set to Enabled

Latency Optimized Mode set to Enabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Apr 17 11:57:53 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
2. `w`
11:57:53 up 1:42, 3 users, load average: 6.20, 6.95, 3.99
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 10:19 1:38m 0.82s 0.00s /bin/bash ./run_multi_speedfp.sh
root pts/0 172.23.2.3 10:19 1:38m 0.02s 0.02s -bash
3. Username
From environment variable \$USER: root
4. `ulimit -a`
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Platform Notes (Continued)

```

file size                (blocks, -f) unlimited
pending signals          (-i) 3094282
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094282
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./run_multi_speedfp.sh
/bin/bash ./run_multi_speedfp.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=192 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=192 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.324/temlogs/preenv.intspeed.324.0.log --lognum 324.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6952P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000405
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaggs bhi
cpu cores      : 96
siblings       : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-31,64-95,128-159
physical id 1: core ids 0-31,64-95,128-159
physical id 0: apicids 0-63,128-191,256-319
physical id 1: apicids 512-575,640-703,768-831
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.40.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```

CPU(s): 384
On-line CPU(s) list: 0-383
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) 6952P
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 96
Socket(s): 2
Stepping: 1
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b engcmd frsm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 9 MiB (192 instances)
L1i cache: 12 MiB (192 instances)
L2 cache: 384 MiB (192 instances)
L3 cache: 960 MiB (2 instances)
NUMA node(s): 6
NUMA node0 CPU(s): 0-31,192-223
NUMA node1 CPU(s): 32-63,224-255
NUMA node2 CPU(s): 64-95,256-287
NUMA node3 CPU(s): 96-127,288-319
NUMA node4 CPU(s): 128-159,320-351
NUMA node5 CPU(s): 160-191,352-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.3

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Jun-2025

Platform Notes (Continued)

L1d	48K	9M	12 Data	1	64	1	64
L1i	64K	12M	16 Instruction	1	64	1	64
L2	2M	384M	16 Unified	2	2048	1	64
L3	480M	960M	16 Unified	3	491520	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 6 nodes (0-5)
node 0 cpus: 0-31,192-223
node 0 size: 128679 MB
node 0 free: 128227 MB
node 1 cpus: 32-63,224-255
node 1 size: 129006 MB
node 1 free: 128611 MB
node 2 cpus: 64-95,256-287
node 2 size: 129006 MB
node 2 free: 128692 MB
node 3 cpus: 96-127,288-319
node 3 size: 129006 MB
node 3 free: 127770 MB
node 4 cpus: 128-159,320-351
node 4 size: 128968 MB
node 4 free: 128553 MB
node 5 cpus: 160-191,352-383
node 5 size: 128928 MB
node 5 free: 128136 MB
node distances:
node  0  1  2  3  4  5
  0:  10  15  17  26  23  26
  1:  15  10  15  23  26  23
  2:  17  15  10  26  28  21
  3:  26  23  26  10  15  17
  4:  23  26  23  15  10  15
  5:  26  28  21  17  15  10

```

9. /proc/meminfo

MemTotal: 792163956 kB

10. who -r

run-level 3 Apr 17 10:16

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofsd autofsd-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

```

man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
vncserver@
indirect      systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=ce1519fb-457a-4blf-ab59-fcfcc7e58c27
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 14:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0nlp3 xfs 1.8T 50G 1.7T 3% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: Lenovo ThinkSystem SC750 V4 Neptune Tray
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
7x SK Hynix HMC88BDJHA380N 32 GB 2 rank 8800
4x SK Hynix HMC88BDJHA383N 32 GB 2 rank 8800
9x SK Hynix HMC88BDJHA462N 32 GB 2 rank 8800
4x SK Hynix HMC88BDJHA464N 32 GB 2 rank 8800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: Q5E111L-1.20
BIOS Date: 12/18/2025
BIOS Revision: 1.20
Firmware Revision: 2.0

Compiler Version Notes

=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Compiler Version Notes (Continued)

Fortran | 648.exchange2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SC750 V4
(2.10 GHz, Intel Xeon 6952P)

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-04-16 23:57:52-0400.

Report generated on 2026-05-06 09:59:29 by CPU2017 PDF formatter v6716.

Originally published on 2026-05-05.