



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

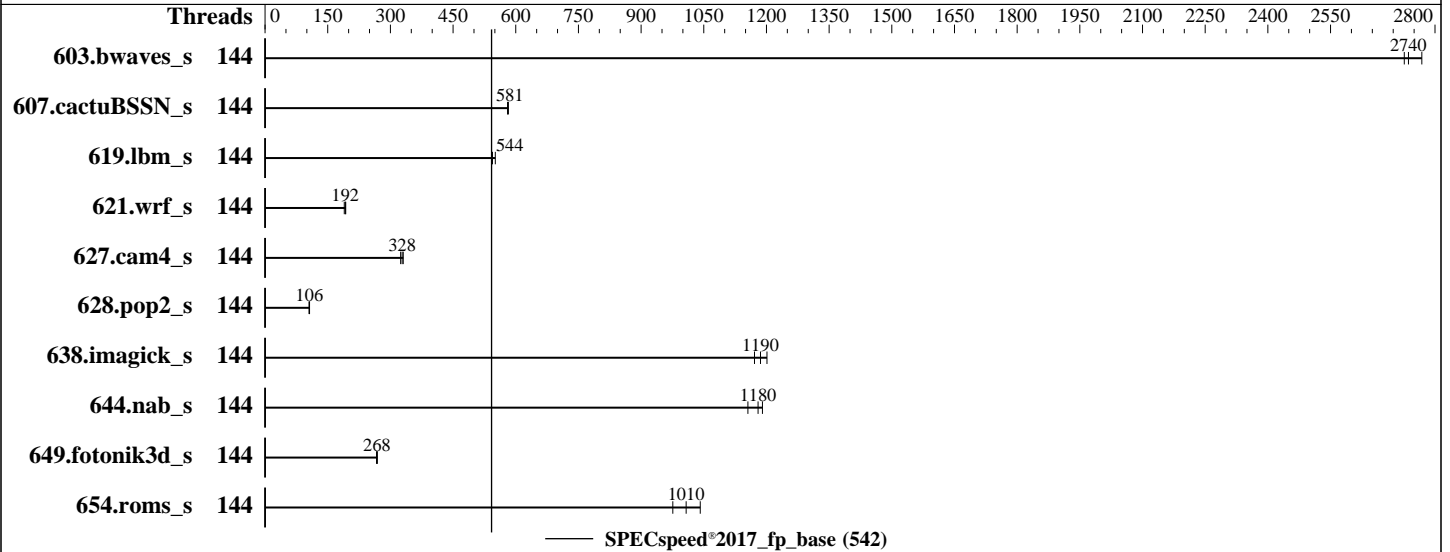

### Hardware

CPU Name: Intel Xeon 6960P  
 Max MHz: 3900  
 Nominal: 2700  
 Enabled: 144 cores, 2 chips  
 Orderable: 2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 432 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-88/64B-H)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP7  
 Kernel 6.4.0-150700.51-default  
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version Q5E111L 1.20 released Dec-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

## Results Table

| Benchmark       | Base    |             |             |             |             |             |             | Peak    |         |       |         |       |         |       |
|-----------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|---------|---------|-------|---------|-------|---------|-------|
|                 | Threads | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s    | 144     | 21.6        | 2730        | 21.3        | 2770        | <u>21.6</u> | <u>2740</u> |         |         |       |         |       |         |       |
| 607.cactuBSSN_s | 144     | 28.6        | 582         | 28.7        | 581         | <u>28.7</u> | <u>581</u>  |         |         |       |         |       |         |       |
| 619.lbm_s       | 144     | 9.51        | 551         | <u>9.62</u> | <u>544</u>  | 9.66        | 542         |         |         |       |         |       |         |       |
| 621.wrf_s       | 144     | 69.8        | 190         | <u>68.8</u> | <u>192</u>  | 68.5        | 193         |         |         |       |         |       |         |       |
| 627.cam4_s      | 144     | 27.3        | 324         | 26.8        | 331         | <u>27.0</u> | <u>328</u>  |         |         |       |         |       |         |       |
| 628.pop2_s      | 144     | 112         | 106         | <u>112</u>  | <u>106</u>  | 113         | 105         |         |         |       |         |       |         |       |
| 638.imagick_s   | 144     | <u>12.2</u> | <u>1190</u> | 12.3        | 1170        | 12.0        | 1200        |         |         |       |         |       |         |       |
| 644.nab_s       | 144     | 15.1        | 1160        | <u>14.8</u> | <u>1180</u> | 14.7        | 1190        |         |         |       |         |       |         |       |
| 649.fotonik3d_s | 144     | 34.2        | 267         | 33.9        | 269         | <u>34.0</u> | <u>268</u>  |         |         |       |         |       |         |       |
| 654.roms_s      | 144     | 15.1        | 1040        | <u>15.6</u> | <u>1010</u> | 16.1        | 976         |         |         |       |         |       |         |       |

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2026.0/lib/intel64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 542

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2026

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2026

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2026

## Platform Notes

BIOS configuration:

Workload Profile set to General Computing - Max Performance and then set it to Custom  
Uncore Frequency Scaling set to Disabled  
LLC Prefetch set to Enabled  
Adjacent Cache Prefetch set to Disabled  
SNC set to Enabled  
Page Policy set to Adaptive  
Hyper-Threading set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2026.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu May 21 23:37:03 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. ulimit -a
4. sysinfo process ancestry
5. /proc/cpuinfo
6. lscpu
7. numactl --hardware
8. /proc/meminfo
9. who -r
10. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

-----

1. uname -a  
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT\_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
23:37:03 up 2 min, 0 users, load average: 0.34, 0.21, 0.08  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

-----

3. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3094942  
max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```
open files                (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes        (-u) 3094942
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

```
-----
4. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
/bin/bash /root/auto_executor.sh
/bin/bash ./Run553-compliant-ic2026.0-lin-sapphirerapids-speedfp-base-smt-off-20260429.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2026.0-lin-sapphirerapids-speed-20260429.cfg --define cores=144 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2026.0-lin-sapphirerapids-speed-20260429.cfg --define cores=144 --tune base --output_format all --define
  drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.032/templogs/preenv.fpspeed.032.0.log --lognum 032.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2026.0
```

```
-----
5. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6960P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000405
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapsg bhi
cpu cores     : 72
siblings      : 72
2 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-23,64-87,128-151
physical id 1: core ids 0-23,64-87,128-151
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,128,130,132,134,136,138,140,142,144,14
6,148,150,152,154,156,158,160,162,164,166,168,170,172,174,256,258,260,262,264,266,268,270,272,274,276,278
,280,282,284,286,288,290,292,294,296,298,300,302
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,640,642,6
44,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
6. lscpu

From lscpu from util-linux 2.40.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                144
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 542

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2026

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2026

Tested by: Lenovo Global Technology

Software Availability: Apr-2026

### Platform Notes (Continued)

```

On-line CPU(s) list:          0-143
Vendor ID:                    GenuineIntel
Model name:                   Intel(R) Xeon(R) 6960P
CPU family:                   6
Model:                        173
Thread(s) per core:          1
Core(s) per socket:          72
Socket(s):                    2
Stepping:                     1
BogoMIPS:                     5400.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                               xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                               ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                               rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt clwb
                               intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                               xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                               gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                               la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                               md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                               amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:               VT-x
L1d cache:                    6.8 MiB (144 instances)
L1i cache:                    9 MiB (144 instances)
L2 cache:                     288 MiB (144 instances)
L3 cache:                     864 MiB (2 instances)
NUMA node(s):                 6
NUMA node0 CPU(s):            0-23
NUMA node1 CPU(s):            24-47
NUMA node2 CPU(s):            48-71
NUMA node3 CPU(s):            72-95
NUMA node4 CPU(s):            96-119
NUMA node5 CPU(s):            120-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability Lltf:            Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:        Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                               PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:  Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 6.8M 12 Data 1 64 1 64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

### Platform Notes (Continued)

|     |      |      |                |   |        |   |    |
|-----|------|------|----------------|---|--------|---|----|
| L1i | 64K  | 9M   | 16 Instruction | 1 | 64     | 1 | 64 |
| L2  | 2M   | 288M | 16 Unified     | 2 | 2048   | 1 | 64 |
| L3  | 432M | 864M | 16 Unified     | 3 | 442368 | 1 | 64 |

#### 7. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 6 nodes (0-5)
node 0 cpus: 0-23
node 0 size: 128753 MB
node 0 free: 128265 MB
node 1 cpus: 24-47
node 1 size: 129017 MB
node 1 free: 128414 MB
node 2 cpus: 48-71
node 2 size: 129017 MB
node 2 free: 128345 MB
node 3 cpus: 72-95
node 3 size: 129017 MB
node 3 free: 128552 MB
node 4 cpus: 96-119
node 4 size: 129017 MB
node 4 free: 128593 MB
node 5 cpus: 120-143
node 5 size: 128939 MB
node 5 free: 128561 MB
node distances:
node  0  1  2  3  4  5
 0:  10  15  17  26  23  26
 1:  15  10  15  23  26  23
 2:  17  15  10  26  28  21
 3:  26  23  26  10  15  17
 4:  23  26  23  15  10  15
 5:  26  28  21  17  15  10

```

#### 8. /proc/meminfo

MemTotal: 792333112 kB

#### 9. who -r

run-level 3 May 21 23:36

#### 10. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```

Default Target Status
multi-user      running

```

#### 11. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd spec-auto sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2026

**Hardware Availability:** Mar-2026

**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
vncserver@
systemd-userdbd wickedd
indirect

```

```

-----
12. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=ce1519fb-457a-4b1f-ab59-fcfcc7e58c27
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
13. cpupower frequency-info
analyzing CPU 84:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap           64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

-----  
17. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP7  
-----

-----  
18. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-ic2026.0  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p3 xfs 1.8T 93G 1.7T 6% /  
-----

-----  
19. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: Lenovo ThinkSystem SC750 V4 Neptune Tray  
Product Family: ThinkSystem  
Serial: 1234567890  
-----

-----  
20. dmidecode  
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
7x SK Hynix HMCG88BDJHA380N 32 GB 2 rank 8800  
4x SK Hynix HMCG88BDJHA383N 32 GB 2 rank 8800  
9x SK Hynix HMCG88BDJHA462N 32 GB 2 rank 8800  
4x SK Hynix HMCG88BDJHA464N 32 GB 2 rank 8800  
-----

-----  
21. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: Q5E111L-1.20  
BIOS Date: 12/18/2025  
BIOS Revision: 1.20  
Firmware Revision: 2.0  
-----

### Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_base = 542

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2026

**Hardware Availability:** Mar-2026

**Software Availability:** Apr-2026

## Compiler Version Notes (Continued)

-----  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----

-----  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 542

ThinkSystem SC750 V4  
(2.70 GHz, Intel Xeon 6960P)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2026

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2026

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2026

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-21 11:37:02-0400.

Report generated on 2026-06-16 17:49:40 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-16.