



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2026

Hardware Availability: Mar-2026

Software Availability: Apr-2026

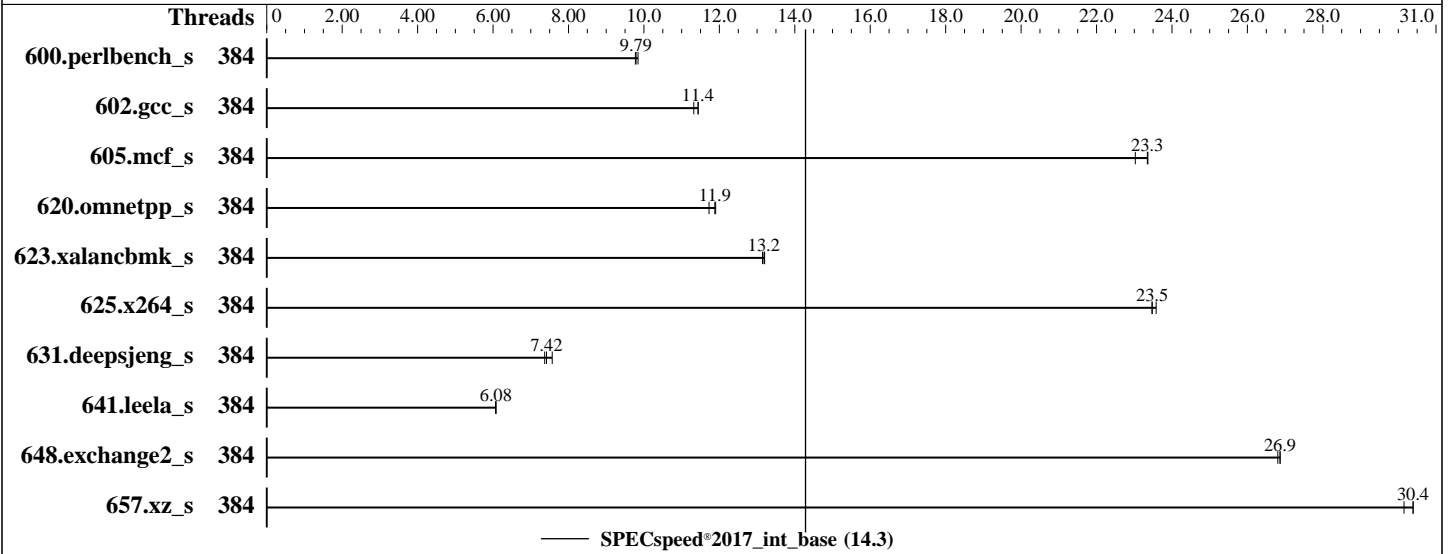

### Hardware

CPU Name: Intel Xeon 6966P-C  
 Max MHz: 3900  
 Nominal: 3100  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 432 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-88/64B-H)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP7  
 Kernel 6.4.0-150700.51-default  
 Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version Q5E111L 1.20 released Dec-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: May-2026  
Hardware Availability: Mar-2026  
Software Availability: Apr-2026

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	384	<b>181</b>	<b>9.79</b>	180	9.84	182	9.77									
602.gcc_s	384	<b>348</b>	<b>11.4</b>	348	11.4	352	11.3									
605.mcf_s	384	202	23.4	<b>202</b>	<b>23.3</b>	205	23.0									
620.omnetpp_s	384	139	11.7	<b>137</b>	<b>11.9</b>	137	11.9									
623.xalancbmk_s	384	108	13.1	107	13.2	<b>107</b>	<b>13.2</b>									
625.x264_s	384	74.8	23.6	<b>75.1</b>	<b>23.5</b>	75.2	23.5									
631.deepsjeng_s	384	194	7.37	<b>193</b>	<b>7.42</b>	189	7.57									
641.leela_s	384	281	6.08	281	6.07	<b>281</b>	<b>6.08</b>									
648.exchange2_s	384	<b>109</b>	<b>26.9</b>	110	26.8	109	26.9									
657.xz_s	384	205	30.2	203	30.4	<b>203</b>	<b>30.4</b>									

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2026.0/lib/intel64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.3

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2026

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2026

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2026

## Platform Notes

BIOS configuration:

Workload Profile set to General Computing - Max Performance and then set it to Custom

C-States set to Legacy

SNC set to Enabled

Latency Optimized Mode set to Enabled

Sysinfo program /home/cpu2017-1.1.9-ic2026.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue May 19 14:27:13 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. ulimit -a
4. sysinfo process ancestry
5. /proc/cpuinfo
6. lscpu
7. numactl --hardware
8. /proc/meminfo
9. who -r
10. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
11. Services, from systemctl list-unit-files
12. Linux kernel boot-time arguments, from /proc/cmdline
13. cpupower frequency-info
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

-----

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

-----

```
2. w
14:27:13 up 5 min, 0 users, load average: 0.03, 0.25, 0.15
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
```

-----

```
3. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094281
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.3

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2026

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2026

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

real-time priority      (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes    (-u) 3094281
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

-----
4. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
/bin/bash /root/auto_executor.sh
/bin/bash ./Run542-compliant-ic2026.0-lin-sapphirerapids-speedint-base-smt-on-20260429.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2026.0-lin-sapphirerapids-speed-20260429.cfg --define cores=192 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2026.0-lin-sapphirerapids-speed-20260429.cfg --define cores=192 --tune base --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2026.0

```

```

-----
5. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6966P-C
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping      : 1
microcode     : 0x1000405
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 96
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-31,64-95,128-159
physical id 1: core ids 0-31,64-95,128-159
physical id 0: apicids 0-63,128-191,256-319
physical id 1: apicids 512-575,640-703,768-831
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
6. lscpu

From lscpu from util-linux 2.40.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) 6966P-C
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):             2

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.3

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```
Stepping: 1
BogoMIPS: 6200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg fma cx16
xtpr pdc m pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b engcmd fsrm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_llid arch_capabilities
VT-x
L1d cache: 9 MiB (192 instances)
L1i cache: 12 MiB (192 instances)
L2 cache: 384 MiB (192 instances)
L3 cache: 864 MiB (2 instances)
NUMA node(s): 6
NUMA node0 CPU(s): 0-31,192-223
NUMA node1 CPU(s): 32-63,224-255
NUMA node2 CPU(s): 64-95,256-287
NUMA node3 CPU(s): 96-127,288-319
NUMA node4 CPU(s): 128-159,320-351
NUMA node5 CPU(s): 160-191,352-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 9M 12 Data 1 64 1 64
L1i 64K 12M 16 Instruction 1 64 1 64
L2 2M 384M 16 Unified 2 2048 1 64
L3 432M 864M 16 Unified 3 442368 1 64
```

```
-----
7. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 6 nodes (0-5)
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

```

node 0 cpus: 0-31,192-223
node 0 size: 128679 MB
node 0 free: 128168 MB
node 1 cpus: 32-63,224-255
node 1 size: 128968 MB
node 1 free: 128524 MB
node 2 cpus: 64-95,256-287
node 2 size: 129006 MB
node 2 free: 128566 MB
node 3 cpus: 96-127,288-319
node 3 size: 129006 MB
node 3 free: 128419 MB
node 4 cpus: 128-159,320-351
node 4 size: 129006 MB
node 4 free: 128551 MB
node 5 cpus: 160-191,352-383
node 5 size: 128928 MB
node 5 free: 128597 MB
node distances:
node  0  1  2  3  4  5
  0: 10 15 17 26 23 26
  1: 15 10 15 23 26 23
  2: 17 15 10 26 28 21
  3: 26 23 26 10 15 17
  4: 23 26 23 15 10 15
  5: 26 28 21 17 15 10

```

```

-----
8. /proc/meminfo
   MemTotal:      792163908 kB

```

```

-----
9. who -r
   run-level 3 May 19 14:23

```

```

-----
10. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
   Default Target   Status
   multi-user       running

```

```

-----
11. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd spec-auto sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime                      systemd-remount-fs
disabled                             autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
vncserver@
indirect                             systemd-userdbd wickedd

```

```

-----
12. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.3

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2026

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2026

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2026

### Platform Notes (Continued)

```
root=UUID=ce1519fb-457a-4b1f-ab59-fcfcc7e58c27
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
13. cpupower frequency-info
analyzing CPU 96:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

```
-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

```
-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
```

```
-----
18. Disk information
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2026  
**Hardware Availability:** Mar-2026  
**Software Availability:** Apr-2026

### Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.9-ic2026.0  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme1nlp3 xfs 1.8T 93G 1.7T 6% /

-----  
19. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: Lenovo ThinkSystem SC750 V4 Neptune Tray  
Product Family: ThinkSystem  
Serial: 1234567890

-----  
20. dmidecode  
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
7x SK Hynix HMCG88BDJHA380N 32 GB 2 rank 8800  
4x SK Hynix HMCG88BDJHA383N 32 GB 2 rank 8800  
9x SK Hynix HMCG88BDJHA462N 32 GB 2 rank 8800  
4x SK Hynix HMCG88BDJHA464N 32 GB 2 rank 8800

-----  
21. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: Q5E111L-1.20  
BIOS Date: 12/18/2025  
BIOS Revision: 1.20  
Firmware Revision: 2.0

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base) 657.xz\_s(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331  
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_int\_base = 14.3

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** May-2026

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2026

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2026

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SC750 V4  
(3.10 GHz, Intel Xeon 6966P-C)

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2026

**Hardware Availability:** Mar-2026

**Software Availability:** Apr-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-K.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-19 02:27:13-0400.

Report generated on 2026-06-16 17:49:38 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-16.