



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro


Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

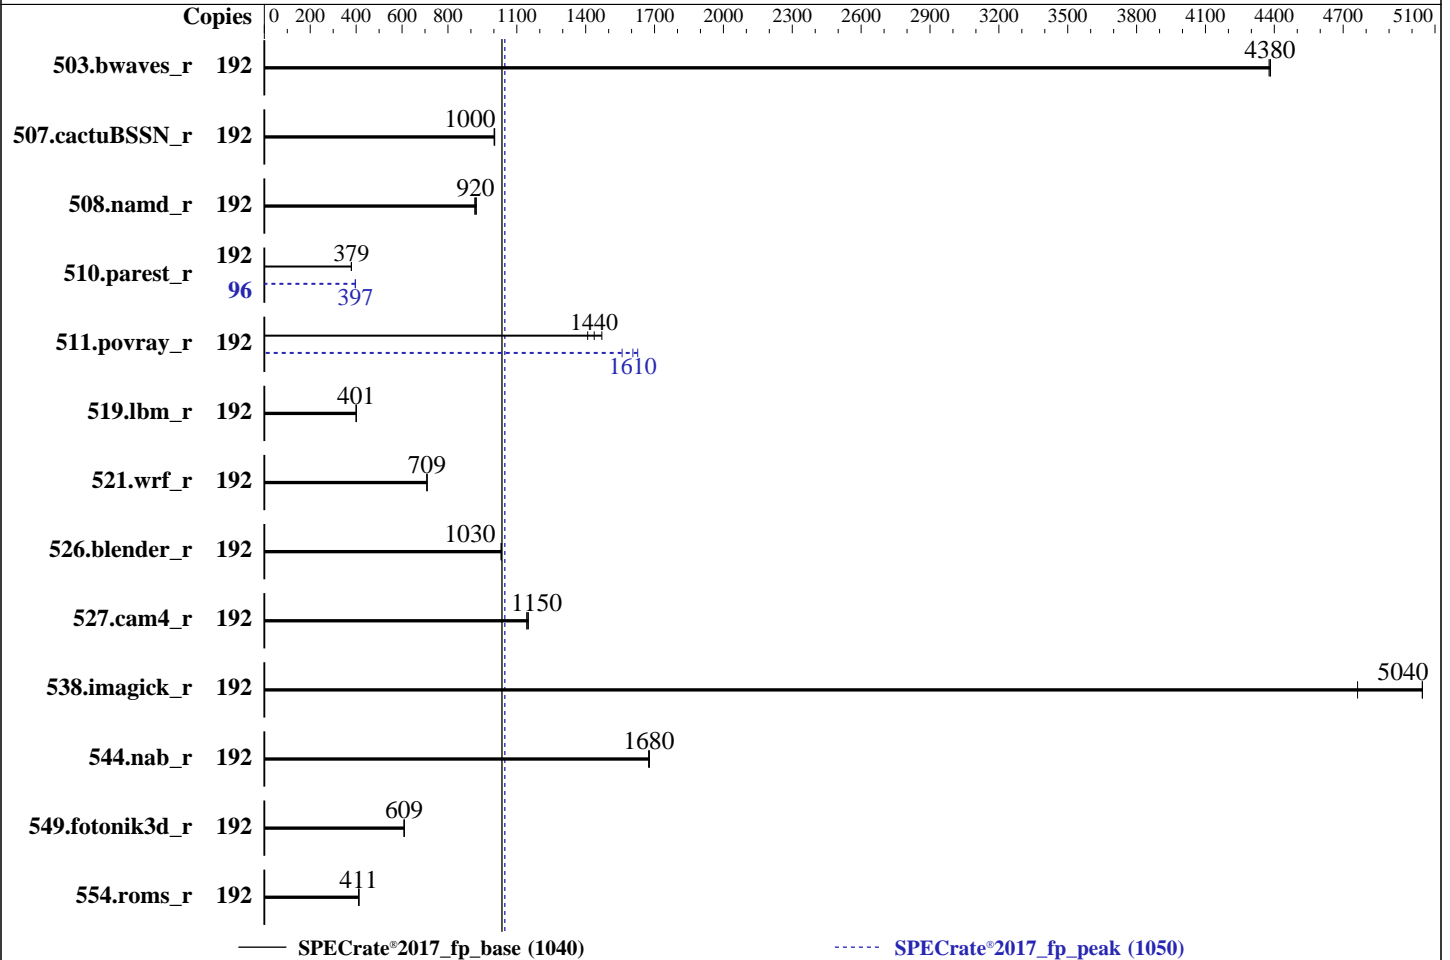

Hardware

CPU Name: Intel Xeon 6970E+
Max MHz: 3200
Nominal: 2300
Enabled: 192 cores, 1 chip
Orderable: 1 chip
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 192 MB I+D on chip per chip, 4 MB shared / 4 cores
L3: 480 MB I+D on chip per chip
Other: None
Memory: 1152 GB (12 x 96 GB 2Rx4 PC5-8000B-R)
Storage: 1 x 480 GB NVMe SSD
Other: CPU Cooling: DLC

Software

OS: Red Hat Enterprise Linux 9.7
Kernel 5.14.0-611.5.1.el9_7.x86_64
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 1.5 released Apr-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP , Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	440	4380	439	4380	439	4380	192	440	4380	439	4380	439	4380
507.cactuBSSN_r	192	242	1000	242	1000	243	1000	192	242	1000	242	1000	243	1000
508.namd_r	192	197	924	199	917	198	920	192	197	924	199	917	198	920
510.parest_r	192	1323	380	1325	379	1324	379	96	633	397	633	397	633	397
511.povray_r	192	312	1440	305	1470	318	1410	192	288	1560	276	1630	279	1610
519.lbm_r	192	505	401	506	400	505	401	192	505	401	506	400	505	401
521.wrf_r	192	607	708	607	709	606	709	192	607	708	607	709	606	709
526.blender_r	192	283	1030	284	1030	283	1030	192	283	1030	284	1030	283	1030
527.cam4_r	192	293	1150	294	1140	292	1150	192	293	1150	294	1140	292	1150
538.imagick_r	192	100	4760	94.6	5050	94.7	5040	192	100	4760	94.6	5050	94.7	5040
544.nab_r	192	193	1670	193	1680	193	1680	192	193	1670	193	1680	193	1680
549.fotonik3d_r	192	1229	609	1228	609	1227	610	192	1229	609	1228	609	1227	610
554.roms_r	192	742	411	740	412	742	411	192	742	411	740	412	742	411

SPECrate®2017_fp_base = **1040**

SPECrate®2017_fp_peak = **1050**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:
Workload Profile = HPC
KTI Prefetch = Enable
Stale AtoS = Disable
LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 135-175-95.engtw Fri May 22 22:27:00 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-55.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux 135-175-95.engtw 5.14.0-611.5.1.e19_7.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Oct 17 14:16:35 EDT 2025
x86_64 x86_64 x86_64 GNU/Linux

2. w
22:27:00 up 5:10, 1 user, load average: 138.67, 179.51, 185.92

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	17:17	5:09m	1.06s	0.01s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4640649
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4640649
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2026.0-lin-clearwaterforest-rate-20260429.cfg --define smt-on --define peakfpcopies=96 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2026.0-lin-clearwaterforest-rate-20260429.cfg --define smt-on --define peakfpcopies=96 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6970E+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 221
stepping       : 1
microcode      : 0x1000120
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi spectre_v2_user
cpu cores      : 192
siblings       : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-63,128-191,256-319

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

physical id 0: apicids

0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,360,362,364,366,368,370,372,374,376,378,380,382,512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,564,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,616,618,620,622,624,626,628,630,632,634,636,638

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 48 bits virtual
Byte Order:                  Little Endian
CPU(s):                      192
On-line CPU(s) list:        0-191
Vendor ID:                   GenuineIntel
BIOS Vendor ID:             Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6970E+
BIOS Model name:            Intel(R) Xeon(R) 6970E+
CPU family:                  6
Model:                       221
Thread(s) per core:         1
Core(s) per socket:         192
Socket(s):                   1
Stepping:                    1
BogoMIPS:                    4600.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon bts rep_good nopl
                             xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma
                             cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin
                             cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                             flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep
                             bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb
                             intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
                             cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                             user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip
                             pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                             cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
                             arch_lbr ibt flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   6 MiB (192 instances)
L1i cache:                   12 MiB (192 instances)
L2 cache:                    192 MiB (48 instances)
L3 cache:                    480 MiB (1 instance)
NUMA node(s):                3
NUMA node0 CPU(s):          0-63
NUMA node1 CPU(s):          64-127
NUMA node2 CPU(s):          128-191
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsa:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	64K	12M	8	Instruction	1	128	1	64
L2	4M	192M	16	Unified	2	4096	1	64
L3	480M	480M	16	Unified	3	491520	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 3 nodes (0-2)
node 0 cpus: 0-63
node 0 size: 386158 MB
node 0 free: 355758 MB
node 1 cpus: 64-127
node 1 size: 387009 MB
node 1 free: 357913 MB
node 2 cpus: 128-191
node 2 size: 387039 MB
node 2 free: 354445 MB
node distances:
node    0    1    2
0:    10   15   17
1:    15   10   15
2:    17   15   10

```

9. /proc/meminfo

MemTotal: 1188053256 kB

10. who -r

run-level 3 May 22 17:16

11. Systemd service manager version: systemd 252 (252-55.el9)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP , Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```

chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi-onboot
iscsi-starter kdump libstoragemgmt lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog selinux-autorelabel-mark smartd
sshd sssd systemd-boot-update systemd-network-generator systemd-pstore tas tuned udisks2
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability chrony-wait chronyd-restricted cni-dhcp console-getty cpupower
debug-shell dnf-system-upgrade iprdump iprinit iprupdate iscsi-init iscsid iscsiuiop kpatch
kvm_stat ledmon lvm-devices-import man-db-restart-cache-update netavark-dhcp-proxy
netavark-firewalld-reload nftables nvme-autoconnect podman podman-auto-update
podman-clean-transient podman-kube@ podman-restart psacct rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-sysex
indirect iscsi sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-611.5.1.el9_7.x86_64
root=/dev/mapper/rhel_135--171--45-root
ro
crashkernel=1G-2G:192M,2G-64G:256M,64G-:512M
resume=/dev/mapper/rhel_135--171--45-swap
rd.lvm.lv=rhel_135-171-45/root
rd.lvm.lv=rhel_135-171-45/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 91:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.7 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.7 (Plow)
system-release       Red Hat Enterprise Linux release 9.7 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem              Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel_135--171--45-home xfs   344G  110G  235G  32% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      PM_1768968004
Product:     PPM_1768968004
Product Family: SMC B14
Serial:      PS_1768968004
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  12x SK Hynix HMCGM4AMBRB970N 96 GB 2 rank 8000
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     1.5
BIOS Date:        04/22/2026
BIOS Revision:    5.35
-----
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP , Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xclearwaterforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xclearwaterforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xclearwaterforest -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xclearwaterforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xclearwaterforest  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xclearwaterforest  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP , Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xclearwaterforest
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

Blade SBI-612BA-1NE34-LCC
(B14SBE-CPU-AP, Intel Xeon 6970E+)

SPECrate®2017_fp_base = 1040

SPECrate®2017_fp_peak = 1050

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2026
Hardware Availability: Jun-2026
Software Availability: Apr-2026

Peak Optimization Flags (Continued)

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2026-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CWF-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-05-22 10:26:59-0400.

Report generated on 2026-06-16 17:50:34 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-16.