



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd. QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087


Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Feb-2025

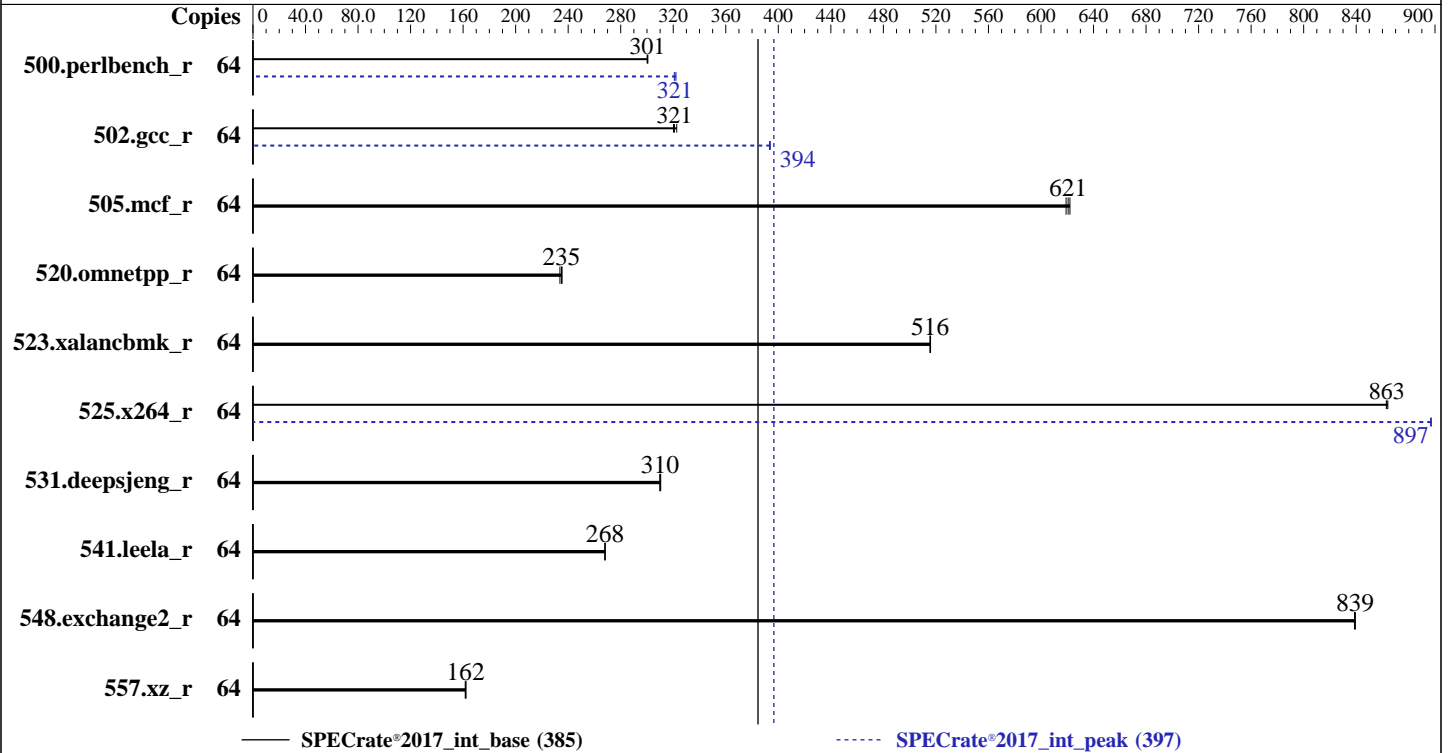

Hardware

CPU Name: Intel Xeon 6515P
 Max MHz: 3800
 Nominal: 2300
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 72 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 1 TB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++: Version 2025.2 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2025.2 of Intel Fortran Compiler
 for Linux;
 C/C++: Version 2024.2 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Parallel: No
 Firmware: Version 04.01.00 released Dec-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at
 the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	339	301	339	301	339	300	64	318	321	317	321	316	322
502.gcc_r	64	281	323	283	320	282	321	64	230	393	230	394	230	394
505.mcf_r	64	167	621	167	619	166	622	64	167	621	167	619	166	622
520.omnetpp_r	64	359	234	357	235	357	235	64	359	234	357	235	357	235
523.xalancbmk_r	64	131	516	131	516	131	516	64	131	516	131	516	131	516
525.x264_r	64	130	863	130	863	130	864	64	125	897	125	897	125	897
531.deepsjeng_r	64	237	310	236	310	237	310	64	237	310	236	310	237	310
541.leela_r	64	396	268	395	268	395	268	64	396	268	395	268	395	268
548.exchange2_r	64	200	839	200	839	200	839	64	200	839	200	839	200	839
557.xz_r	64	426	162	427	162	428	162	64	426	162	427	162	428	162

SPECrate®2017_int_base = **385**

SPECrate®2017_int_peak = **397**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode = Performance
SNC = Enable
Latency Optimized Mode = Enable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jan 2 23:32:54 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
23:32:54 up 10 min, 1 user, load average: 0.00, 0.21, 0.26
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1      -             23:32   13.00s  1.27s  0.04s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size              (blocks, -f) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd. QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfra Co., Ltd.
Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```

pending signals                (-i) 4126411
max locked memory              (kbytes, -l) 8192
max memory size                (kbytes, -m) unlimited
open files                     (-n) 1024
pipe size                      (512 bytes, -p) 8
POSIX message queues          (bytes, -q) 819200
real-time priority            (-r) 0
stack size                    (kbytes, -s) unlimited
cpu time                      (seconds, -t) unlimited
max user processes            (-u) 4126411
virtual memory                 (kbytes, -v) unlimited
file locks                    (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
  ic2025.2-lin-graniterapids-rate-20250605.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
  ic2025.2-lin-graniterapids-rate-20250605.cfg --define smt-on --define cores=32 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.018/templogs/preenv.intrate.018.0.log --lognum 018.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6515P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```

Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6515P
BIOS Model name: Intel(R) Xeon(R) 6515P CPU @ 2.3GHz
BIOS CPU family: 179
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
Stepping: 1
CPU(s) scaling MHz: 21%
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4600.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpoperdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities
L1d cache: 1.5 MiB (32 instances)
L1i cache: 2 MiB (32 instances)
L2 cache: 64 MiB (32 instances)
L3 cache: 144 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-15,32-47
NUMA node1 CPU(s): 16-31,48-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 1.5M 12 Data 1 64 1 64

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd. QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfra Co., Ltd.
Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Platform Notes (Continued)

L1i	64K	2M	16 Instruction	1	64	1	64
L2	2M	64M	16 Unified	2	2048	1	64
L3	72M	144M	16 Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 515566 MB
node 0 free: 514469 MB
node 1 cpus: 16-31,48-63
node 1 size: 516062 MB
node 1 free: 515216 MB
node distances:
node  0  1
  0: 10  21
  1: 21  10

```

9. /proc/meminfo

MemTotal: 1056388208 kB

10. who -r

run-level 3 Jan 2 23:22

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage auditd cron display-manager getty@ irqbalance
            issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
            nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
            wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         apparmor autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates
            chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables
            exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd
            issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind
            rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd
            systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
            systemd-time-wait-sync systemd-timesyncd tuned udisks2 vncserver@
indirect     systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=9a795dfb-lba6-4802-bd8a-006ca90ba081
splash=silent
mitigations=auto
quiet

```

14. cpupower frequency-info

analyzing CPU 0:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Platform Notes (Continued)

current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "powersave" may decide which speed to use within this range.

boost state support:
Supported: yes
Active: yes

15. tunedadm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385
SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Platform Notes (Continued)

/dev/nvme0nlp2 xfs 929G 52G 878G 6% /

21. /sys/devices/virtual/dmi/id
Vendor: Maginfraco.
Product: QR8218-T3
Product Family: Not specified
Serial: 00000000

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
4x Samsung M321R8GA0PB1-CCPQC 64 GB 2 rank 6400
9x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
3x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 04.01.00
BIOS Date: 12/17/2025

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.2.1 Build 20240711
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.2.1 Build 20240711
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385
SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Compiler Version Notes (Continued)

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

`-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc`

C++ benchmarks:

`-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc`

Fortran benchmarks:

`-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/intel-compilers/compiler/2025.2/lib -lqkmalloc`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icx`

`502.gcc_r: icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Peak Portability Flags

`500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64`



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate®2017_int_base = 385

SPECrate®2017_int_peak = 397

CPU2017 License: 9087
Test Sponsor: Maginfraco., Ltd.
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026
Hardware Availability: Dec-2025
Software Availability: Feb-2025

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow -fno-strict-aliasing  
-L/home/specdev/intel-compilers/compiler/2025.2/lib  
-lqkmallocc
```

```
502.gcc_r: -m32 -L/home/specdev/intel-compilers/compiler/2024.2/lib32  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemallocc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/home/specdev/intel-compilers/compiler/2025.2/lib  
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Maginfraco-Platform-Settings-intel-V1.0.html>



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8218-T3 (Intel Xeon 6515P)

SPECrate[®]2017_int_base = 385

SPECrate[®]2017_int_peak = 397

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Feb-2025

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-intel-v1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.9 on 2025-01-02 23:32:53-0500.

Report generated on 2026-06-30 17:09:28 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-30.