



# SPEC CPU®2017 Floating Point Rate Result


Copyright 2017-2026 Standard Performance Evaluation Corporation

## Maginfra Co., Ltd. QR8218-D3 (AMD EPYC 9655)

### SPECrate®2017\_fp\_base = 1980 SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087  
Test Sponsor: Maginfra Co., Ltd.  
Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026  
Hardware Availability: Dec-2025  
Software Availability: Jun-2025

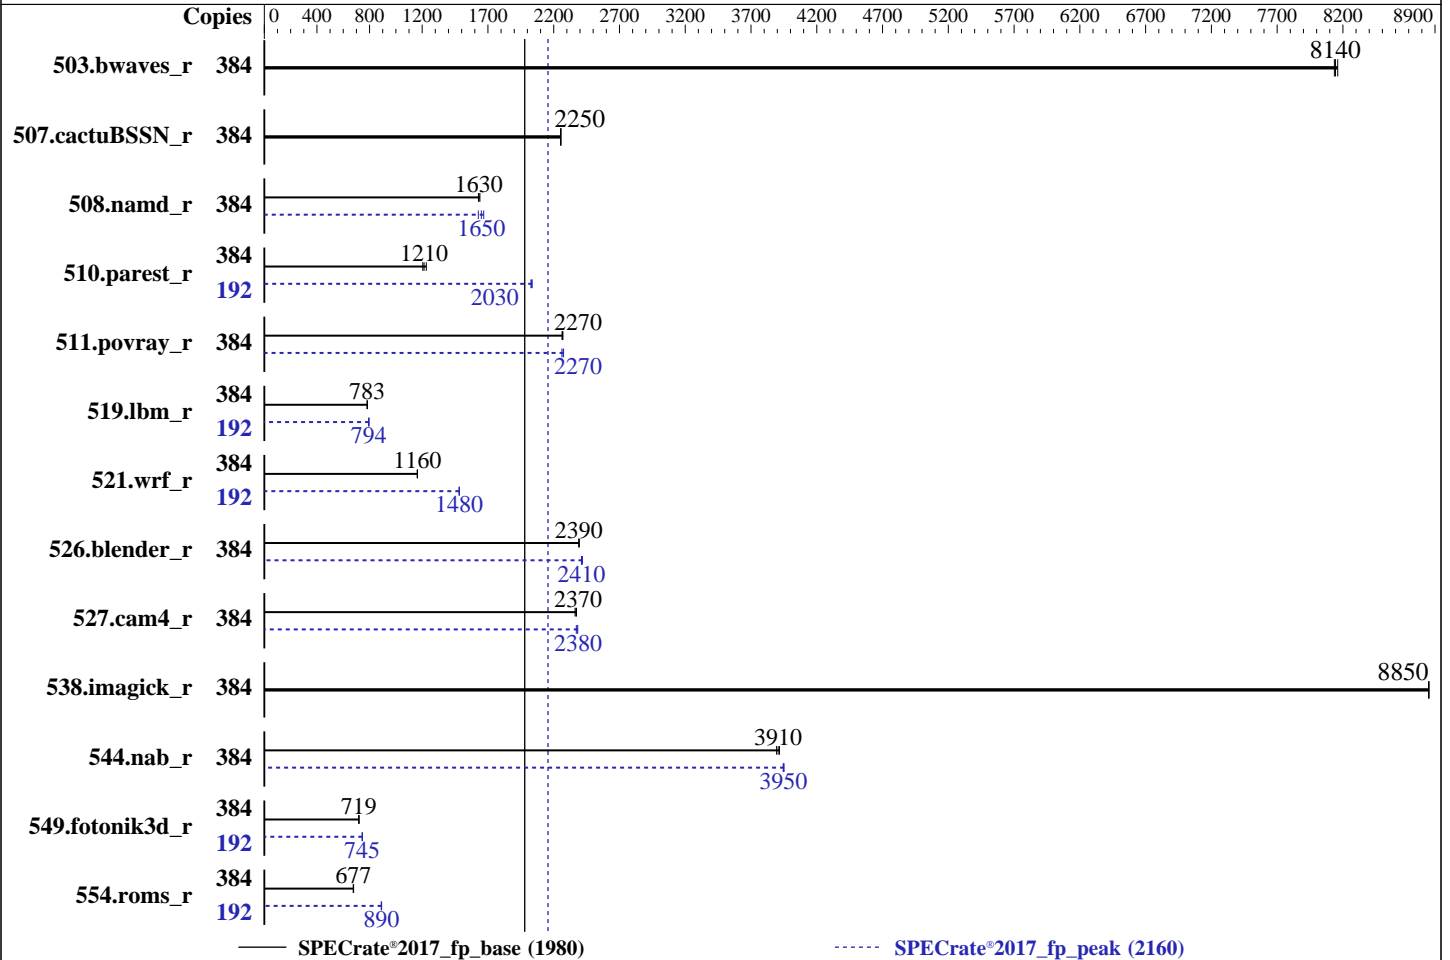

### Hardware

CPU Name: AMD EPYC 9655  
 Max MHz: 4500  
 Nominal: 2600  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 4 TB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 01.08.00 released Feb-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.  
QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_base = 1980

SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087  
Test Sponsor: Maginfraco., Ltd.  
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026  
Hardware Availability: Dec-2025  
Software Availability: Jun-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	<b>473</b>	<b>8140</b>	473	8130	472	8160	384	<b>473</b>	<b>8140</b>	473	8130	472	8160
507.cactuBSSN_r	384	216	2250	<b>216</b>	<b>2250</b>	216	2250	384	216	2250	<b>216</b>	<b>2250</b>	216	2250
508.namd_r	384	<b>224</b>	<b>1630</b>	223	1640	224	1630	384	224	1630	<b>221</b>	<b>1650</b>	219	1670
510.parest_r	384	816	1230	834	1200	<b>827</b>	<b>1210</b>	192	248	2030	<b>247</b>	<b>2030</b>	247	2040
511.povray_r	384	395	2270	396	2260	<b>395</b>	<b>2270</b>	384	<b>395</b>	<b>2270</b>	396	2260	394	2280
519.lbm_r	384	517	783	<b>517</b>	<b>783</b>	517	782	192	255	793	<b>255</b>	<b>794</b>	254	796
521.wrf_r	384	<b>739</b>	<b>1160</b>	739	1160	740	1160	192	<b>290</b>	<b>1480</b>	290	1480	290	1480
526.blender_r	384	245	2390	244	2390	<b>245</b>	<b>2390</b>	384	243	2410	242	2420	<b>243</b>	<b>2410</b>
527.cam4_r	384	<b>283</b>	<b>2370</b>	284	2360	283	2370	384	<b>282</b>	<b>2380</b>	282	2380	283	2370
538.imagick_r	384	<b>108</b>	<b>8850</b>	108	8850	108	8850	384	<b>108</b>	<b>8850</b>	108	8850	108	8850
544.nab_r	384	165	3920	<b>165</b>	<b>3910</b>	166	3890	384	164	3950	<b>164</b>	<b>3950</b>	164	3940
549.fotonik3d_r	384	2084	718	2079	720	<b>2081</b>	<b>719</b>	192	1005	745	<b>1004</b>	<b>745</b>	1004	745
554.roms_r	384	903	676	899	679	<b>901</b>	<b>677</b>	192	343	889	342	892	<b>343</b>	<b>890</b>

SPECrate®2017\_fp\_base = **1980**

SPECrate®2017\_fp\_peak = **2160**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfraco., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**  
**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087  
**Test Sponsor:** Maginfraco., Ltd.  
**Tested by:** Maginfraco., Ltd.

**Test Date:** Jun-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Jun-2025

## Operating System Notes (Continued)

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/CPU2017/amd\_rate\_aocc500\_znver5\_A\_lib/lib:/home/CPU2017/amd\_rate\_aocc500\_znver5\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
NUMA nodes per socket = NPS4  
Determinism Slider = Power  
cTDP Control = Manual  
cTDP = 500  
Package Power Limit Control = Manual  
Package Power Limit = 500

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jun 3 22:42:33 2026

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfraco., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**  
**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087  
**Test Sponsor:** Maginfraco., Ltd.  
**Tested by:** Maginfraco., Ltd.

**Test Date:** Jun-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Jun-2025

## Platform Notes (Continued)

- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
-----
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
22:42:33 up 5:00, 1 user, load average: 195.07, 333.04, 361.91
USER      TTY      FROM          LOGIN@      IDLE   JCPU   PCPU WHAT
root      tty1    -             17:42       4:59m  1.11s  0.28s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6189715
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 6189715
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.064/templogs/preenv.fprate.064.0.log --lognum 064.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfraco., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**

**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087  
**Test Sponsor:** Maginfraco., Ltd.  
**Tested by:** Maginfraco., Ltd.

**Test Date:** Jun-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Jun-2025

## Platform Notes (Continued)

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9655 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 192 4K pages
cpu cores      : 96
siblings       : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9655 96-Core Processor
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   96
Socket(s):             2
Stepping:              1
Frequency boost:      enabled
CPU(s) scaling MHz:   100%
CPU max MHz:           2600.0000
CPU min MHz:           1500.0000
BogoMIPS:              5192.34
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfraco., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**  
**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087  
**Test Sponsor:** Maginfraco., Ltd.  
**Tested by:** Maginfraco., Ltd.

**Test Date:** Jun-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Jun-2025

## Platform Notes (Continued)

pausefilter pftreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl  
vnmi avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_llid debug\_swap hv\_inuse\_wr\_allowed srso\_user\_kernel\_no  
amd\_lbr\_pmc\_freeze

Virtualization: AMD-V  
L1d cache: 9 MiB (192 instances)  
L1i cache: 6 MiB (192 instances)  
L2 cache: 192 MiB (192 instances)  
L3 cache: 768 MiB (24 instances)  
NUMA node(s): 8  
NUMA node0 CPU(s): 0-23,192-215  
NUMA node1 CPU(s): 24-47,216-239  
NUMA node2 CPU(s): 48-71,240-263  
NUMA node3 CPU(s): 72-95,264-287  
NUMA node4 CPU(s): 96-119,288-311  
NUMA node5 CPU(s): 120-143,312-335  
NUMA node6 CPU(s): 144-167,336-359  
NUMA node7 CPU(s): 168-191,360-383  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:  
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE  
L1d 48K 9M 12 Data 1 64 1 64  
L1i 32K 6M 8 Instruction 1 64 1 64  
L2 1M 192M 16 Unified 2 1024 1 64  
L3 32M 768M 16 Unified 3 32768 1 64

8. numactl --hardware  
NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)  
node 0 cpus: 0-23,192-215  
node 0 size: 192979 MB  
node 0 free: 191430 MB  
node 1 cpus: 24-47,216-239  
node 1 size: 193484 MB  
node 1 free: 192034 MB  
node 2 cpus: 48-71,240-263  
node 2 size: 193523 MB  
node 2 free: 192071 MB  
node 3 cpus: 72-95,264-287  
node 3 size: 193523 MB  
node 3 free: 192051 MB  
node 4 cpus: 96-119,288-311

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

## Maginfraco., Ltd.

## QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_base = 1980

SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

### Platform Notes (Continued)

```

node 4 size: 193523 MB
node 4 free: 192049 MB
node 5 cpus: 120-143,312-335
node 5 size: 193523 MB
node 5 free: 192027 MB
node 6 cpus: 144-167,336-359
node 6 size: 193523 MB
node 6 free: 192098 MB
node 7 cpus: 168-191,360-383
node 7 size: 193375 MB
node 7 free: 191909 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1584594848 kB

```

```

-----
10. who -r
run-level 3 Jun 3 17:42

```

```

-----
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
Default Target  Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
               issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
               nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
enabled-runtime systemd-remount-fs
disabled       autofast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
               chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
               firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
               kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
               serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
               systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync
               systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
               wickedd-dhcp6 wickedd-nanny
indirect       systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=b599d87c-474e-4c72-b781-36d0bcedf18d
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfraco., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**  
**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087  
**Test Sponsor:** Maginfraco., Ltd.  
**Tested by:** Maginfraco., Ltd.

**Test Date:** Jun-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Jun-2025

## Platform Notes (Continued)

```
-----
14. cpupower frequency-info
    analyzing CPU 255:
        current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.
    boost state support:
        Supported: yes
        Active: yes
-----
```

```
-----
15. tuned-adm active
    It seems that tuned daemon is not running, preset profile is not activated.
    Preset profile: throughput-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfraco., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**  
**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087  
**Test Sponsor:** Maginfraco., Ltd.  
**Tested by:** Maginfraco., Ltd.

**Test Date:** Jun-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Jun-2025

## Platform Notes (Continued)

### 20. Disk information

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	xf	929G	39G	891G	5%	/

### 21. /sys/devices/virtual/dmi/id

Vendor: Maginfraco.  
 Product: QR8218-D3  
 Product Family: Not specified  
 Serial: 00000000

### 22. dmidecode

Additional information from dmidecode 3.6 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400  
 11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400  
 1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
 BIOS Version: 01.08.00  
 BIOS Date: 02/08/2025

## Compiler Version Notes

=====  
 C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
 =====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
 =====

=====  
 C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
 =====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
 =====

=====  
 C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
 =====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
 Target: x86\_64-unknown-linux-gnu  
 Thread model: posix  
 InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
 =====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfraco., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**  
**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087  
**Test Sponsor:** Maginfraco., Ltd.  
**Tested by:** Maginfraco., Ltd.

**Test Date:** Jun-2026  
**Hardware Availability:** Dec-2025  
**Software Availability:** Jun-2025

## Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.  
QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_base = 1980

SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087  
Test Sponsor: Maginfraco., Ltd.  
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026  
Hardware Availability: Dec-2025  
Software Availability: Jun-2025

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using both C and C++:  
clang++ clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.  
QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_base = 1980

SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087  
Test Sponsor: Maginfraco., Ltd.  
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026  
Hardware Availability: Dec-2025  
Software Availability: Jun-2025

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.  
QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_base = 1980  
SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087  
Test Sponsor: Maginfraco., Ltd.  
Tested by: Maginfraco., Ltd.

Test Date: Jun-2026  
Hardware Availability: Dec-2025  
Software Availability: Jun-2025

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017\_fp\_base = 1980

QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick\_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017\_fp\_base = 1980

QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

## Peak Optimization Flags (Continued)

508.namd\_r (continued):

```
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017\_fp\_base = 1980

QR8218-D3 (AMD EPYC 9655)

SPECrate®2017\_fp\_peak = 2160

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

## Peak Optimization Flags (Continued)

527.cam4\_r (continued):

```
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

**Maginfra Co., Ltd.**  
**QR8218-D3 (AMD EPYC 9655)**

**SPECrate®2017\_fp\_base = 1980**

**SPECrate®2017\_fp\_peak = 2160**

**CPU2017 License:** 9087

**Test Sponsor:** Maginfra Co., Ltd.

**Tested by:** Maginfra Co., Ltd.

**Test Date:** Jun-2026

**Hardware Availability:** Dec-2025

**Software Availability:** Jun-2025

## Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-03 22:42:33-0400.

Report generated on 2026-06-30 17:09:48 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-30.