



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087


Test Date: Jun-2026

Test Sponsor: Maginfra Co., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfra Co., Ltd.

Software Availability: Jun-2025

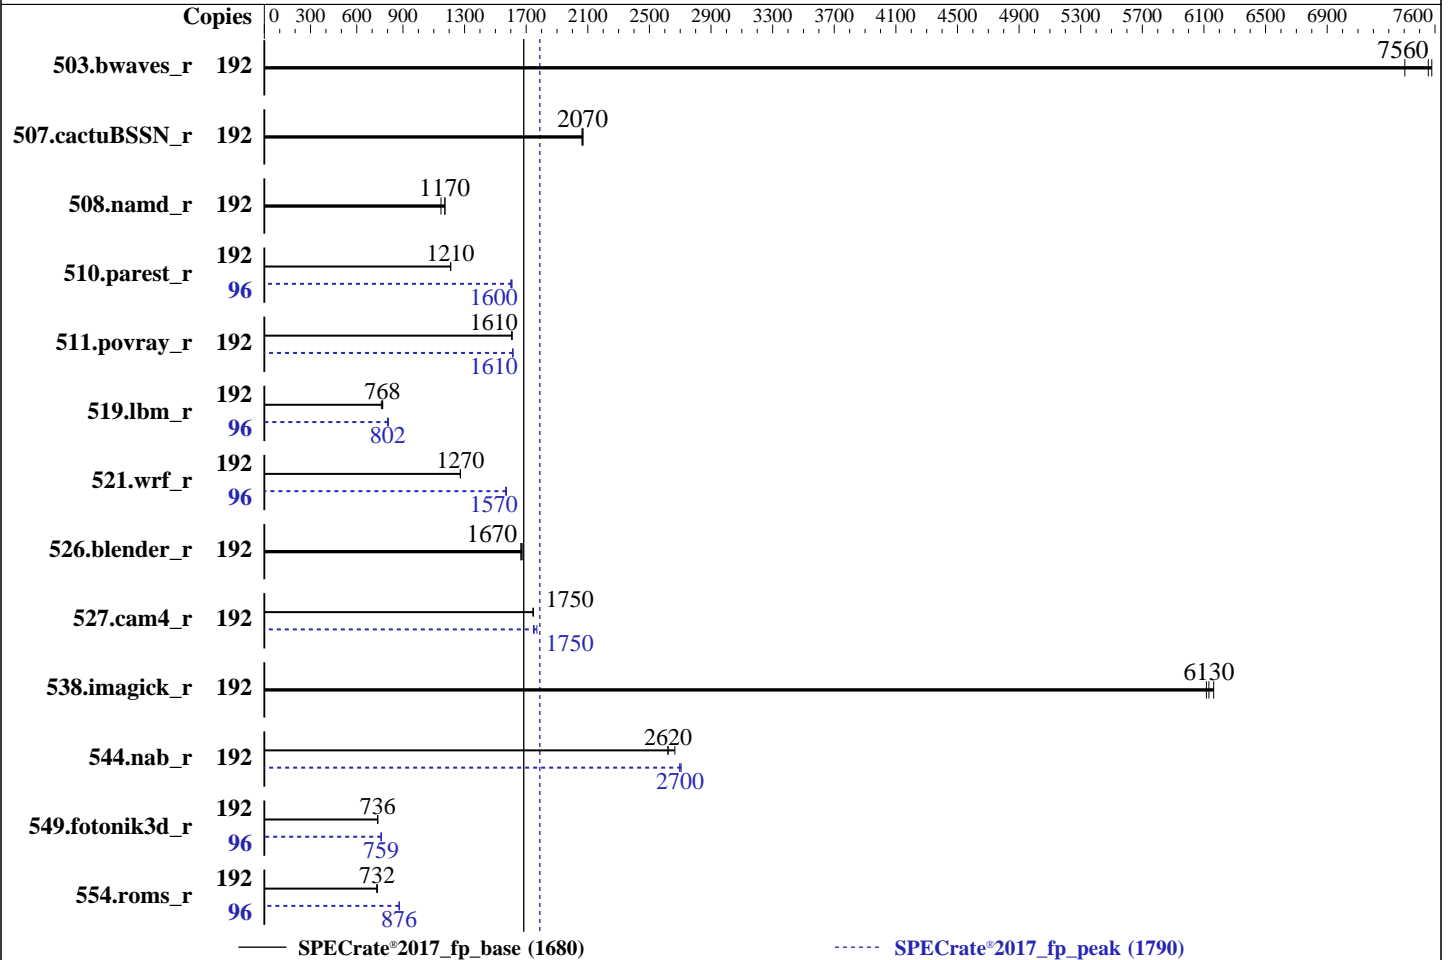

Hardware

CPU Name: AMD EPYC 9475F
 Max MHz: 4800
 Nominal: 3650
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 4 TB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version 01.14.00 released Dec-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	254	7580	<u>255</u>	<u>7560</u>	260	7400	192	254	7580	<u>255</u>	<u>7560</u>	260	7400
507.cactuBSSN_r	192	118	2060	<u>118</u>	<u>2070</u>	117	2070	192	118	2060	<u>118</u>	<u>2070</u>	117	2070
508.namd_r	192	159	1150	156	1170	<u>156</u>	<u>1170</u>	192	159	1150	156	1170	<u>156</u>	<u>1170</u>
510.parest_r	192	415	1210	<u>415</u>	<u>1210</u>	415	1210	96	<u>157</u>	<u>1600</u>	156	1610	157	1600
511.povray_r	192	279	1610	<u>279</u>	<u>1610</u>	279	1610	192	278	1610	<u>278</u>	<u>1610</u>	278	1610
519.lbm_r	192	266	760	<u>264</u>	<u>768</u>	263	768	96	126	801	<u>126</u>	<u>802</u>	126	805
521.wrf_r	192	338	1270	338	1270	<u>338</u>	<u>1270</u>	96	<u>137</u>	<u>1570</u>	137	1570	137	1570
526.blender_r	192	175	1670	<u>175</u>	<u>1670</u>	176	1670	192	175	1670	<u>175</u>	<u>1670</u>	176	1670
527.cam4_r	192	<u>192</u>	<u>1750</u>	192	1740	192	1750	192	<u>192</u>	<u>1750</u>	192	1750	190	1770
538.imagick_r	192	77.5	6160	78.1	6120	<u>77.9</u>	<u>6130</u>	192	77.5	6160	78.1	6120	<u>77.9</u>	<u>6130</u>
544.nab_r	192	<u>123</u>	<u>2620</u>	123	2620	121	2670	192	<u>120</u>	<u>2700</u>	120	2700	119	2710
549.fotonik3d_r	192	<u>1017</u>	<u>736</u>	1016	736	1017	735	96	<u>493</u>	<u>759</u>	493	759	493	759
554.roms_r	192	418	730	416	733	<u>417</u>	<u>732</u>	96	174	875	<u>174</u>	<u>876</u>	174	877

SPECrate®2017_fp_base = 1680

SPECrate®2017_fp_peak = 1790

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Operating System Notes (Continued)

'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
NUMA nodes per socket = NPS4
Determinism Slider = Power
cTDP Control = Manual
cTDP = 500
Package Power Limit Control = Manual
Package Power Limit = 500

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Jun 16 00:50:27 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Failed units, from systemctl list-units --state=failed

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

- 13. Services, from `systemctl list-unit-files`
- 14. Linux kernel boot-time arguments, from `/proc/cmdline`
- 15. `cpupower frequency-info`
- 16. `tuned-adm active`
- 17. `sysctl`
- 18. `/sys/kernel/mm/transparent_hugepage`
- 19. `/sys/kernel/mm/transparent_hugepage/khugepaged`
- 20. OS release
- 21. Disk information
- 22. `/sys/devices/virtual/dmi/id`
- 23. `dmidecode`
- 24. BIOS

```
-----
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
00:50:27 up 4:23, 2 users, load average: 124.02, 174.41, 183.84
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1    -             20:26       3:46m      1.15s      0.21s      /bin/bash ./amd_rate_aocc500_znver5_A1.sh
root      tty2    -             20:38       4:12m      0.01s      0.00s      more
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6190362
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 6190362
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.091/temlogs/preenv.fprate.091.0.log --lognum 091.0 --from_runcpu 2
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9475F 48-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00215a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 192 4K pages
cpu cores      : 48
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 1: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 1: apicids 128-139,144-155,160-171,176-187,192-203,208-219,224-235,240-251

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9475F 48-Core Processor
CPU family:            26
Model:                2
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):             2
Stepping:              1
Frequency boost:      enabled
CPU(s) scaling MHz:   101%
CPU max MHz:          3650.0000
CPU min MHz:          1500.0000
BogoMIPS:              7289.25
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtsmp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

```

xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrp_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap hv_inuse_wr_allowed srso_user_kernel_no
amd_lbr_pmc_freeze

```

Virtualization:

AMD-V

L1d cache: 4.5 MiB (96 instances)

L1i cache: 3 MiB (96 instances)

L2 cache: 96 MiB (96 instances)

L3 cache: 512 MiB (16 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-11,96-107

NUMA node1 CPU(s): 12-23,108-119

NUMA node2 CPU(s): 24-35,120-131

NUMA node3 CPU(s): 36-47,132-143

NUMA node4 CPU(s): 48-59,144-155

NUMA node5 CPU(s): 60-71,156-167

NUMA node6 CPU(s): 72-83,168-179

NUMA node7 CPU(s): 84-95,180-191

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-11,96-107

node 0 size: 193051 MB

node 0 free: 192125 MB

node 1 cpus: 12-23,108-119

node 1 size: 193529 MB

node 1 free: 192629 MB

node 2 cpus: 24-35,120-131

node 2 size: 193529 MB

node 2 free: 192614 MB

node 3 cpus: 36-47,132-143

node 3 size: 193490 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfra Co., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfra Co., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

```

node 3 free: 192575 MB
node 4 cpus: 48-59,144-155
node 4 size: 193529 MB
node 4 free: 192628 MB
node 5 cpus: 60-71,156-167
node 5 size: 193529 MB
node 5 free: 192642 MB
node 6 cpus: 72-83,168-179
node 6 size: 193529 MB
node 6 free: 192632 MB
node 7 cpus: 84-95,180-191
node 7 size: 193427 MB
node 7 free: 192530 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584760572 kB

```

```

-----
10. who -r
    run-level 3 Jun 15 20:26

```

```

-----
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
    Default Target   Status
    multi-user       degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
    UNIT              LOAD    ACTIVE SUB    DESCRIPTION
* logrotate.service loaded failed failed Rotate log files

```

```

-----
13. Services, from systemctl list-unit-files
    STATE      UNIT FILES
enabled      YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
              issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
              nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore
enabled-runtime  systemd-remount-fs
disabled      autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
              chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
              firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
              kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
              serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
              systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
              systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
              wickedd-dhcp6 wickedd-nanny
indirect     systemd-userdbd wickedd

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=b599d87c-474e-4c72-b781-36d0bcedf18d
splash=silent
mitigations=auto
quiet
security=apparmor
```

15. cpupower frequency-info

```
analyzing CPU 51:
  current policy: frequency should be within 1.50 GHz and 3.65 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

16. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
```

17. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

18. /sys/kernel/mm/transparent_hugepage

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

19. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

scan_sleep_millisecs 10000

20. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

21. Disk information

SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 929G 40G 890G 5% /

22. /sys/devices/virtual/dmi/id

Vendor: Maginfra
Product: QR8218-D3
Product Family: Not specified
Serial: 00000000

23. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

24. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 01.14.00
BIOS Date: 12/25/2025

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfra Co., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfra Co., Ltd.

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

508.namd_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfraco., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfraco., Ltd.

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

527.cam4_r (continued):

-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

SPECrate®2017_fp_base = 1680

QR8218-D3 (AMD EPYC 9475F)

SPECrate®2017_fp_peak = 1790

CPU2017 License: 9087

Test Date: Jun-2026

Test Sponsor: Maginfra Co., Ltd.

Hardware Availability: Dec-2025

Tested by: Maginfra Co., Ltd.

Software Availability: Jun-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-16 00:50:27-0400.

Report generated on 2026-06-30 17:09:48 by CPU2017 PDF formatter v6716.

Originally published on 2026-06-30.