SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR230-2 (2.10 GHz, Intel Xeon 6740P)

SPECspeed®2017_int_base = 14.1

SPECspeed®2017_int_peak = 14.3

CPU2017 License: 6857
Test Sponsor: Compal Electronics, Inc.
Tested by: Compal Electronics, Inc.

Test Date: Jun-2026
Hardware Availability: May-2025
Software Availability: Jun-2025

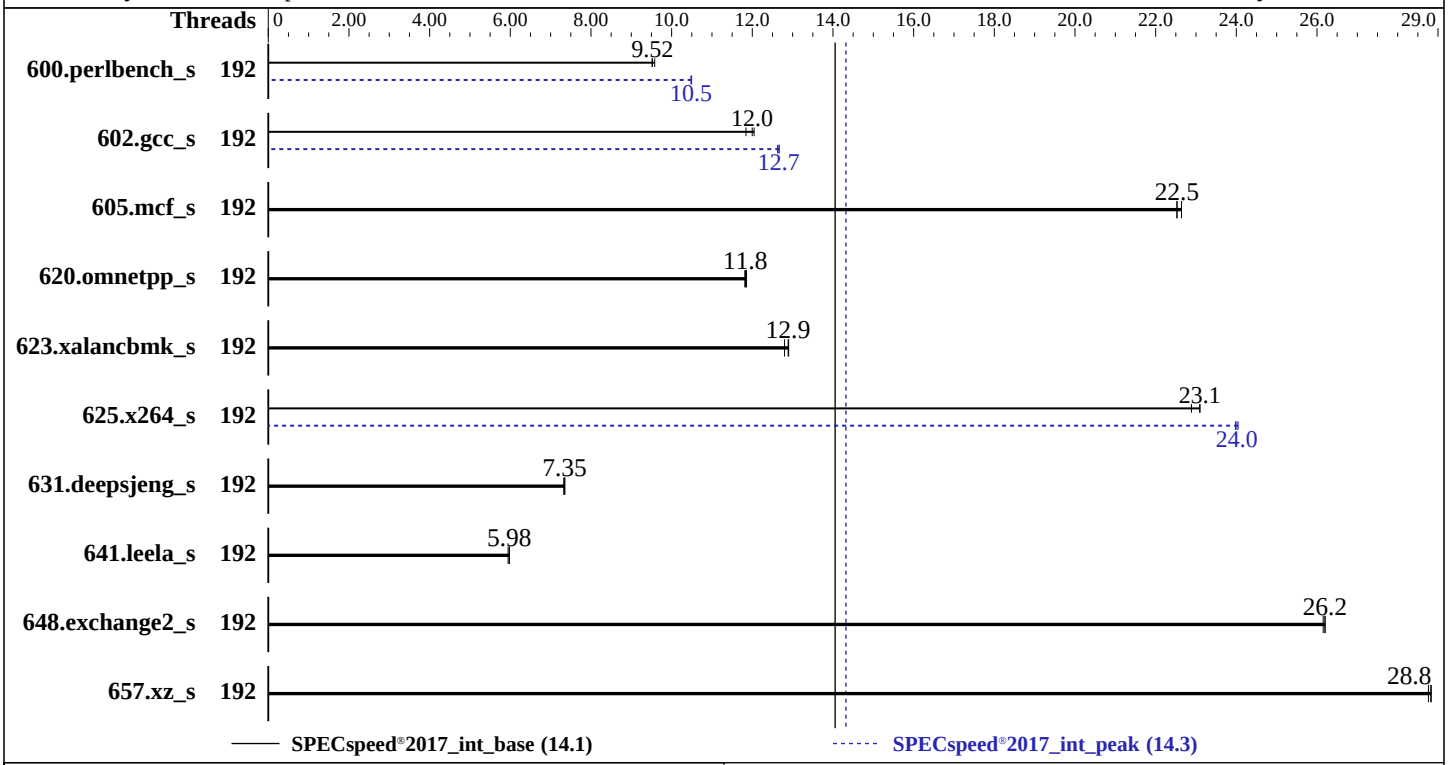

Hardware

CPU Name:	Intel Xeon 6740P
Max MHz:	3800
Nominal:	2100
Enabled:	96 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	288 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 3.84 TB PCIe NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler:	C/C++: Version 2025.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2025.2 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 02.45.00 released Jun-2026
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to balance power and performance

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Compal Electronics, Inc.

SR230-2 (2.10 GHz, Intel Xeon 6740P)

SPECspeed®2017_int_base = 14.1

SPECspeed®2017_int_peak = 14.3

CPU2017 License: 6857
Test Sponsor: Compal Electronics, Inc.
Tested by: Compal Electronics, Inc.

Test Date: Jun-2026
Hardware Availability: May-2025
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	187	9.52	185	9.58	**186**	**9.52**	192	169	10.5	169	10.5	**169**	**10.5**
602.gcc_s	192	331	12.0	336	11.8	**332**	**12.0**	192	314	12.7	315	12.6	**315**	**12.7**
605.mcf_s	192	210	22.5	209	22.6	**210**	**22.5**	192	210	22.5	209	22.6	**210**	**22.5**
620.omnetpp_s	192	138	11.8	**138**	**11.8**	138	11.9	192	138	11.8	**138**	**11.8**	138	11.9
623.xalancbmk_s	192	110	12.9	**110**	**12.9**	111	12.8	192	110	12.9	**110**	**12.9**	111	12.8
625.x264_s	192	77.1	22.9	76.4	23.1	**76.4**	**23.1**	192	73.6	24.0	**73.5**	**24.0**	73.4	24.0
631.deepsjeng_s	192	196	7.32	195	7.35	**195**	**7.35**	192	196	7.32	195	7.35	**195**	**7.35**
641.leela_s	192	287	5.95	**285**	**5.98**	285	5.98	192	287	5.95	**285**	**5.98**	285	5.98
648.exchange2_s	192	**112**	**26.2**	112	26.2	112	26.2	192	**112**	**26.2**	112	26.2	112	26.2
657.xz_s	192	214	28.8	**214**	**28.8**	215	28.8	192	214	28.8	**214**	**28.8**	215	28.8

SPECspeed®2017_int_base = 14.1

SPECspeed®2017_int_peak = 14.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2025.2/lib/intel64:/home/cpu2025.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
      Enable LP [Global]            :   ALL LPs
      Adjacent Cache Prefetch       :   Disable
      LLC Prefetch                  :   Enable
      Turbo Mode                    :   Enable
      Power Performance Tuning      :   BIOS Controls EPB
      ENERGY_PERF_BIAS_CFG mode     :   Performance
```

(Continued on next page)

Platform Notes (Continued)

```
      Performance Mode              :   Balanced
      Latency Optimized Mode        :   Enabled
      (For GNR CPU) NUMA            :   Enabled
      SNC                           :   Enable
      SR-IOV Support                :   Disable
      Page Policy                   :   Adaptive
      AVX License Pre-Grant Override:   Enable
      AVX ICCP pre-grant level      :   256 Heavy

 Sysinfo program /home/cpu2025.2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sun Jun 14 09:42:00 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    09:42:00 up 1 day, 17:58,  2 users,  load average: 0.45, 0.11, 0.04
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     pts/0    10.113.136.1     22Apr24  7.00s  2.47s  0.00s -bash

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 4124309
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4124309
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2025.2-lin-graniterapids-speed-20250605.cfg --define cores=96 --tune base,peak -o all --define
   intspeedaffinity --define smt-on --define drop_caches intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2025.2-lin-graniterapids-speed-20250605.cfg --define cores=96 --tune base,peak --output_format all
   --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
   --size refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.026/templogs/preenv.intspeed.026.0.log --lognum 026.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2025.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6740P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000405
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 48
    siblings        : 96
    2 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-23,64-87
    physical id 1: core ids 0-23,64-87
    physical id 0: apicids 0-47,128-175
    physical id 1: apicids 256-303,384-431
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
CPU op-mode(s):                  32-bit, 64-bit
Address sizes:                   52 bits physical, 57 bits virtual
Byte Order:                      Little Endian
CPU(s):                          192
On-line CPU(s) list:             0-191
Vendor ID:                       GenuineIntel
BIOS Vendor ID:                  Intel(R) Corporation
Model name:                      Intel(R) Xeon(R) 6740P
BIOS Model name:                 Intel(R) Xeon(R) 6740P  CPU @ 2.1GHz
BIOS CPU family:                 179
CPU family:                      6
Model:                           173
Thread(s) per core:              2
Core(s) per socket:              48
Socket(s):                       2
Stepping:                        1
CPU(s) scaling MHz:              21%
CPU max MHz:                     3800.0000
CPU min MHz:                     800.0000
BogoMIPS:                        4200.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                 pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                 pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                 nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                 pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                 tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                 vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                 rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                 clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                 xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                 arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                                 umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                 avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                 cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                 pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                 arch_capabilities
Virtualization:                  VT-x
L1d cache:                       4.5 MiB (96 instances)
L1i cache:                       6 MiB (96 instances)
L2 cache:                        192 MiB (96 instances)
L3 cache:                        576 MiB (2 instances)
NUMA node(s):                    4
NUMA node0 CPU(s):               0-23,96-119
NUMA node1 CPU(s):               24-47,120-143
NUMA node2 CPU(s):               48-71,144-167
NUMA node3 CPU(s):               72-95,168-191
Vulnerability Gather data sampling:   Not affected
Vulnerability Itlb multihit:          Not affected
Vulnerability L1tf:                   Not affected
Vulnerability Mds:                    Not affected
Vulnerability Meltdown:               Not affected
Vulnerability Mmio stale data:        Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:               Not affected
Vulnerability Spec rstack overflow:   Not affected
Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                        PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.5M   12 Data            1     64        1             64
     L1i       64K       6M   16 Instruction     1     64        1             64
     L2         2M     192M   16 Unified         2   2048        1             64
     L3       288M     576M   16 Unified         3 294912        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-23,96-119
  node 0 size: 257426 MB
  node 0 free: 255640 MB
  node 1 cpus: 24-47,120-143
  node 1 size: 258035 MB
  node 1 free: 253410 MB
  node 2 cpus: 48-71,144-167
  node 2 size: 258035 MB
  node 2 free: 257395 MB
  node 3 cpus: 72-95,168-191
  node 3 size: 257610 MB
  node 3 free: 252470 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055853308 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 22 20:00

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
                   display-manager firewalld getty@ ipmi irqbalance issue-generator kbdsettings kdump
                   kdump-early kdump-notify klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect
                   postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
                   ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables
```

(Continued on next page)

Platform Notes (Continued)

```
                    exchange-bmc-os-info fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmievd
                    issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
                    ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                    smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd svnserve
                    systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                    systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
  indirect          systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=64556400-9eff-48eb-b8a8-0dcaa956400d
  splash=silent
  resume=/dev/disk/by-uuid/a2731b0b-df7f-426a-9660-58c24d12e37e
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=385M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 12:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2025.2
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   1.5T  798G  723G  53% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         COMPAL
    Product:        COMPAL SERVER
    Product Family: COMPAL
    Serial:         0000000000000

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R8GA0EB2-CCPKC 64 GB 2 rank 6400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      02.45.00
   BIOS Date:         05/06/2026
   BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2025.2.0 Build 20250605
Copyright (C) 1985-2025 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fdelayed-template-parsing -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xgraniterapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-fno-strict-aliasing -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)

(Continued on next page)

Peak Optimization Flags (Continued)

602.gcc_s (continued):
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xgraniterapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-Intel_V1.1.html
http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-Intel_V1.1.xml
http://www.spec.org/cpu2017/flags/Intel-ic2025-official-linux64.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-06-13 21:41:59-0400.
Report generated on 2026-08-11 18:21:46 by CPU2017 PS formatter v6716.
Originally published on 2026-08-11.